



McGraw-Edison **GPC Galleon Pedestrian Companion**

Optical Distributions

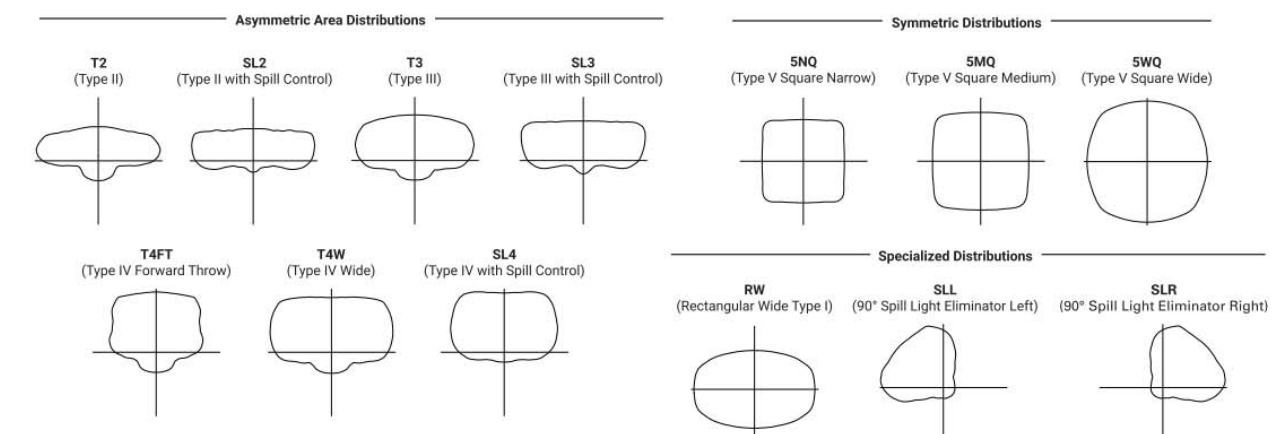


Optic Orientation

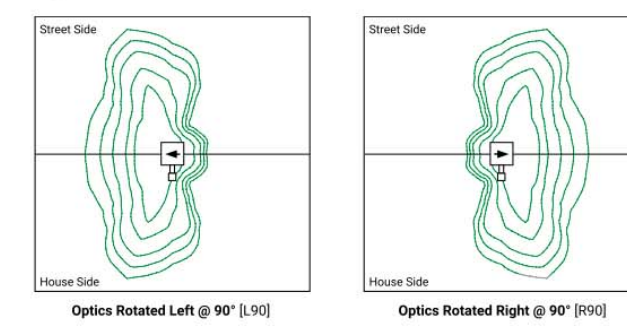

Energy and Performance Data

Lumen Multiplier		Lumen Maintenance	
Ambient Temperature	Lumen Multiplier	Drive Current	Ambient Temperature
6°C	1.02	Up to 1A	Up to 50°C
10°C	1.01	1.2A	Up to 40°C
25°C	1.00		
40°C	0.99		
50°C	0.97		

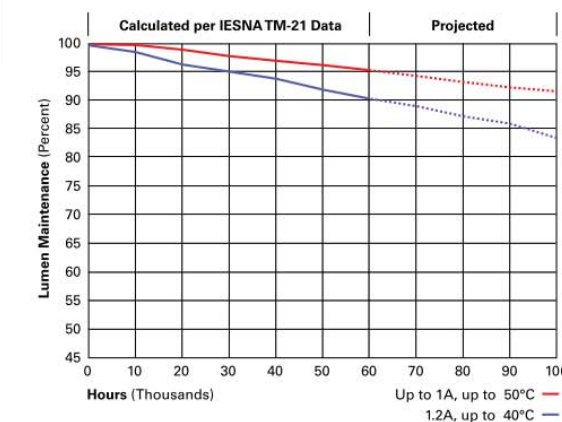

McGraw-Edison **GPC Galleon Pedestrian Companion**

Energy and Performance Data [View GPC Galleon Pedestrian IES Files](#)

4000K/5000K/6000K CCT, 70 CRI		1		2	
Number of Light Squares	Drive Current	615mA	800mA	1050mA	1.2A
Nominal Power (Watts)		34	44	59	67
Input Current @ 120V (A)		0.30	0.39	0.51	0.58
Input Current @ 208V (A)		0.17	0.22	0.29	0.33
Input Current @ 240V (A)		0.15	0.19	0.26	0.29
Input Current @ 277V (A)		0.14	0.17	0.23	0.25
Input Current @ 347V (A)		0.11	0.15	0.17	0.20
Input Current @ 480V (A)		0.08	0.11	0.14	0.15

* Nominal lumen data for 70 CRI. BUG rating for 4000K/5000K. Refer to IES files for 3000K BUG ratings.

McGraw-Edison **GPC Galleon Pedestrian Companion**

Energy and Performance Data [View GPC Galleon Pedestrian IES Files](#)

3000K CCT, 80 CRI		1		2	
Number of Light Squares	Drive Current	615mA	800mA	1050mA	1.2A
Nominal Power (Watts)		34	44	59	67
Input Current @ 120V (A)		0.30	0.39	0.51	0.58
Input Current @ 208V (A)		0.17	0.22	0.29	0.33
Input Current @ 240V (A)		0.15	0.19	0.26	0.29
Input Current @ 277V (A)		0.14	0.17	0.23	0.25
Input Current @ 347V (A)		0.11	0.15	0.17	0.20
Input Current @ 480V (A)		0.08	0.11	0.14	0.15

* Nominal lumen data for 70 CRI. BUG rating for 4000K/5000K. Refer to IES files for 3000K BUG ratings.

McGraw-Edison **GPC Galleon Pedestrian Companion**


Control Options

0-10V This feature is offered standard with 0-10V dimming driver(s). The DIM option provides 0-10V dimming wire leads for use with a lighting control panel or other control method.


Photocontrol (BPC, PR, and PR7) Optional button-type photocontrol (BPC) and photocontrol receptacles (PR and PR7) provide a flexible solution to enable "dusk-to-dawn" lighting by sensing light levels. Advanced control systems compatible with NEMA 7-pin standards can be utilized with the PR7 receptacle.

After Hours Dim (AHD) This feature allows photocontrol-enabled luminaires to achieve additional energy savings by dimming during scheduled portions of the night. The dimming profile will automatically take effect after a "dusk-to-dawn" period has been calculated from the photocontrol input. Specify the desired dimming profile for a simple, factory-shipped dimming solution requiring no external control wiring. Reference the After Hours Dim supplemental guide for additional information.

Dimming Occupancy Sensor (SPB, MS-DIM-LXX and MS-LXX) These sensors are factory installed in the luminaire housing. When the SPB or MS-DIM sensor options are selected, the occupancy sensor is connected to a dimming driver and the entire luminaire dims when there is no activity detected. When activity is detected, the luminaire returns to full light output. The MS-DIM sensor is factory preset to dim down to approximately 50 percent power with a time delay of five minutes. The MS-LXX sensor is factory preset to turn the luminaire off after five minutes of no activity. SPB motion sensors require the Sensor Configuration mobile application by Wattsstopper to change factory default dimming level, time delay, sensitivity and other parameters. Available for iOS and Android devices. The SPB sensor is factory preset to dim down to approximately 10% power with a time delay of five minutes. The MS-DIM occupancy sensors require the FSIR-100 programming tool to adjust factory defaults.

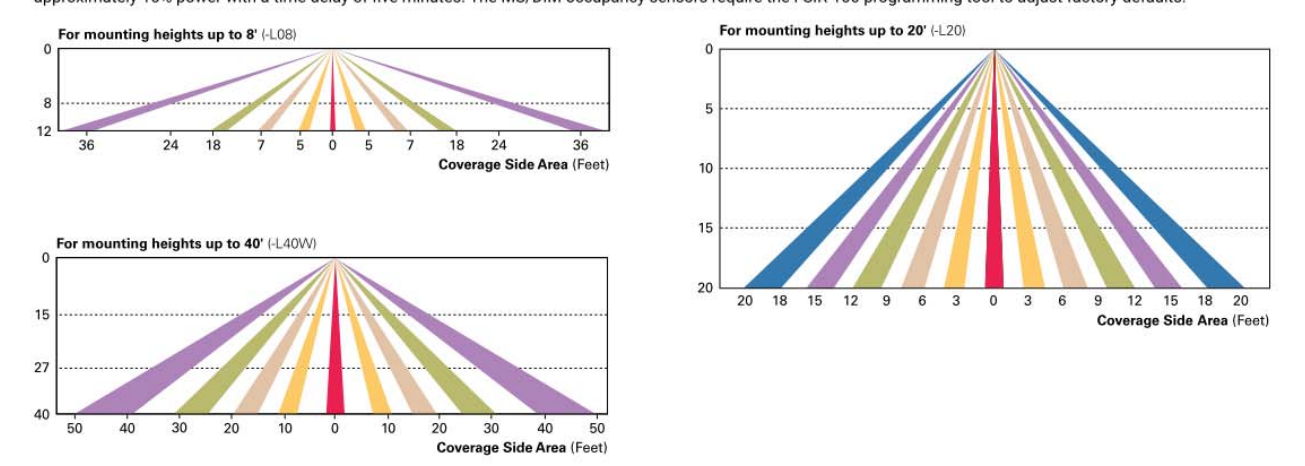

Enlightened Wireless Control and Monitoring System (LWR-LW and LWR-LN) The Enlightened control system is a connected lighting solution, combining LED luminaires with an integrated wireless sensor system. The sensor controls the lighting system in compliance with the latest energy codes while collecting valuable data about building performance and use. Software applications utilizing energy dashboards maximize data inputs to help optimize the use of other resources beyond lighting.

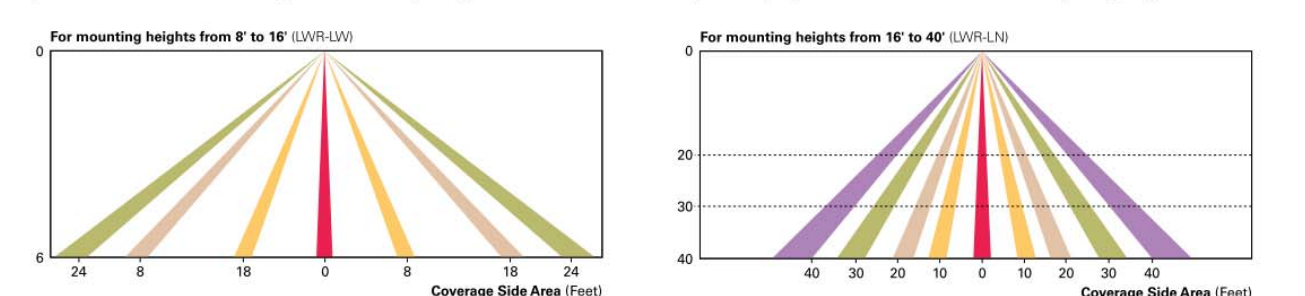

WaveLine Wireless Outdoor Lighting Control Module (WOLC-79-10A) The 7-in wireless outdoor lighting control module enables WaveLine to control outdoor area, site and flood lighting. WaveLine controls outdoor lighting using schedules to provide ON, OFF and dimming controls based on astronomical or time schedules based on a 7 day week.

NOT FOR CONSTRUCTION TEXT

MIAMI BEACH
PUBLIC WORKS DEPARTMENT
1700 CONVENTION CENTER DRIVE, MIAMI BEACH, FL 33139

NEIGHBORHOOD: **WEST AVENUE WATER TREATMENT PARKING**

PERMUY
ARCHITECTURE
INTERIOR DESIGN
PLANNING

CITY MANAGER: ALINA T. HUDAK
DIRECTOR: JOSE GOMEZ, P.E.
CITY ENGINEER: NELSON PEREZ-JACOME, P.E.

ENG. OF RECORD: X.X.
DESIGN ENGINEER: X.X.
DRAWN BY: X.X.
CHECKER: X.X.
SCALE: AS NOTED

NO.	DATE	REVISION

File Name: _____
Survey Reference: _____
Field Book: _____ Page: _____ Work Order: 2016-091-KB
Date: 2021.09.30 Sheet: _____ Drawing: _____