

RENOVATION + ADDITION TO AN EXISTING SYNAGOGUE

ADAS DEJ SYNAGOGUE BAIS ELIYAHU LLC

225 37th Street Miami Beach, FL 33140

VISUAL MEMORIES



INDEX OF DRAWINGS

ARCHITECTURE	
A0.0	COVER
A0.1	ZONING DATA
A0.2	EXISTING BUILDING PHOTOS
A0.3	EXISTING BUILDING PHOTOS
A0.4	MICROFILM
A0.5	MICROFILM
A0.6	MICROFILM
A0.7	CONTEXT LOCATION SITE PLAN
A0.8	FLOOR AREA RATIO CALCS
A0.9	REQUESTED VARIANCES
D1.0	EXISTING DEMO FLOOR PLANS
D2.0	EXISTING DEMO ELEVATIONS
A2.0	PROPOSED RITUAL BATH BASEMENT PLAN
A2.1	PROPOSED SITE GROUND FLOOR PLAN
A2.2	PROPOSED APARTMENT #1 LEVEL 2
A2.3	PROPOSED APARTMENT #2 LEVEL 3
A2.4	PROPOSED ROOF PLAN
A3.0	PROPOSED NORTH + SOUTH ELEVATIONS
A3.1	PROPOSED EAST ELEVATION
A3.2	PROPOSED WEST ELEVATION
A4.0	PROPOSED SECTION 1
A4.1	PROPOSED SECTION 2
A4.2	PROPOSED SECTION 3
A5.0	PROPOSED RENDERINGS
STRUCTURE	
S100.00	TEMPLE GROUND FLOOR & FOUNDATION PLAN
S102.00	LEVEL 2, FLOOR FRAMING PLAN
S103.00	LEVEL 3, FLOOR FRAMING PLAN
LANDSCAPE	
L1.0	LANDSCAPE PLAN
L1.1	LANDSCAPE NOTES

PROJECT TEAM



ARCHITECT OF RECORD:

SKLARchitecture

2310 HOLLYWOOD BLVD.
HOLLYWOOD, FL 33020
www.sklararchitect.com
Office (954) 925-9292
Fax (954) 925-6292
AA 0002849
IB 0000894
NCARB CERTIFIED

OWNER :

BAIS ELIYAHU LLC
RABBI ARON WEINBERGER
Address: 6 Kerestier Ct #301
Monroe, Ny, 10950
Tel. (845) 537 0643

SCOPE OF WORK

THE WORK CONSISTS OF:

RENOVATION + ADDITION TO AN EXISTING 2 STORY BUILDING

EXISTING 2 STORIES:

- GROUND FLOOR EXISTING SYNAGOGUE
- 2ND FLOOR 2 EXISTING APARTMENTS

EXISTING AREA = 2,800 SF

PROPOSED 4 STORIES:

- BASEMENT- RITUAL BATH AREA
- GROUND FLOOR- TEMPLE
- 2ND FLOOR- RABBIS RESIDENCE
- 3RD FLOOR- CANTOR RESIDENCE + PRIVATE TERRACE

PROPOSED AREA = 7,897 SF

LEGAL DESCRIPTION

THIS PROPERTY IS DESCRIBED AS:

FOLIO: 02-3226-001-1720

23-26-27-34 53 42 PB 5-8


MIAMI BEACH IMPROVEMENT CO SUB

LOT 16 BLK 28

LOT SIZE 40.000 X 100

OR 9908-1838

LOCATION MAP

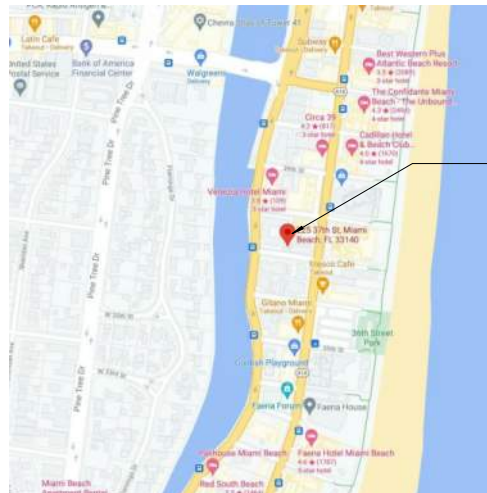

LOCATION
OF WORK



SCALE: N.T.S.

PROPOSED RENDERING



REQUESTED VARIANCES

- 1) A variance from the rear setback. Required 10'-0". Proposed zero.
- 2) A variance from the east side. Required: 7'-6". Proposed zero at stairs on the Northeast. and 7.29' at the building
- 3) A variance from the west side setback. Required 7'-6". Proposed: 4.65'
- 4) A variance to exceed the maximum 25% projection allowed for an access stair and platform in the front.
- 5) A variance from maximum 30% building structures in the rear yard.

See Zoning Data Chart on Page A0.1 and Requested Variances Plan on Page A.09

CODE ANALYSIS

PLANS SHALL COMPLY WITH THE FOLLOWING:	
FLORIDA BUILDING CODE - (2020 / 7th Edition)	
FLORIDA FIRE PREVENTION CODE - (2020 / 7th Edition)	
FLORIDA BUILDING CODE - ACCESSIBILITY (2020 / 7th Edition)	
NATIONAL FIRE PROTECTION ASSOCIATION CODE - (2020 / 7th Edition)	
MIXED USE ENTERTAINMENT	
TENANT ENTERTAINMENT (THIS PERMIT)	3-STORY WOOD-CONCRETE STRUCTURE
FIRE RESISTANCE RATING REQUIREMENTS FOR BLDG ELEMENT (TABLE 601)	
TYPE II A CONSTRUCTION	
STRUCTURAL FRAME	1 HR
BEARING WALLS (EXT & INT)	1 EXT/ 1 INT HR
NONBEARING WALLS & PARTITIONS	0 HR
FLOOR CONSTRUCTION	1 HR
ROOF CONSTRUCTION	1 HR
REQUIRED SEPARATION OF OCCUPANCIES M / M = 0 HR (TABLE 302.2)	
*TYPE OF CONSTRUCTION WAS DETERMINED USING "NONSEPARATED" OCCUPANCIES (508.3).	
504.2 Automatic sprinkler system increase. / 506.3 Automatic sprinkler system increase.	

ADAS DEJ SYNAGOGUE
225 37TH ST. MIAMI BEACH FL. 33139


FIRST SUBMITTAL
NOV. 30th 2021

1 CITY COMMENTS 11/29/2021

COVER

Project #21-009

A0.0



JOHN IBARRA & ASSOCIATES, INC.
Professional Land Surveyors & Mappers



WWW.IBARRALANDSURVEYORS.COM
777 N.W. 72nd AVENUE
SUITE 3025
MIAMI, FLORIDA 33126
PH: (305) 262-0400
FAX: (305) 262-0401

3725 DEL PRADO BLVD. S.
SUITE B
CAPE CORAL, FL 33904
PH: (239) 540-2660
FAX: (239) 540-2664




MAP OF BOUNDARY SURVEY

225 37th STREET, MIAMI BEACH, FLORIDA 33140

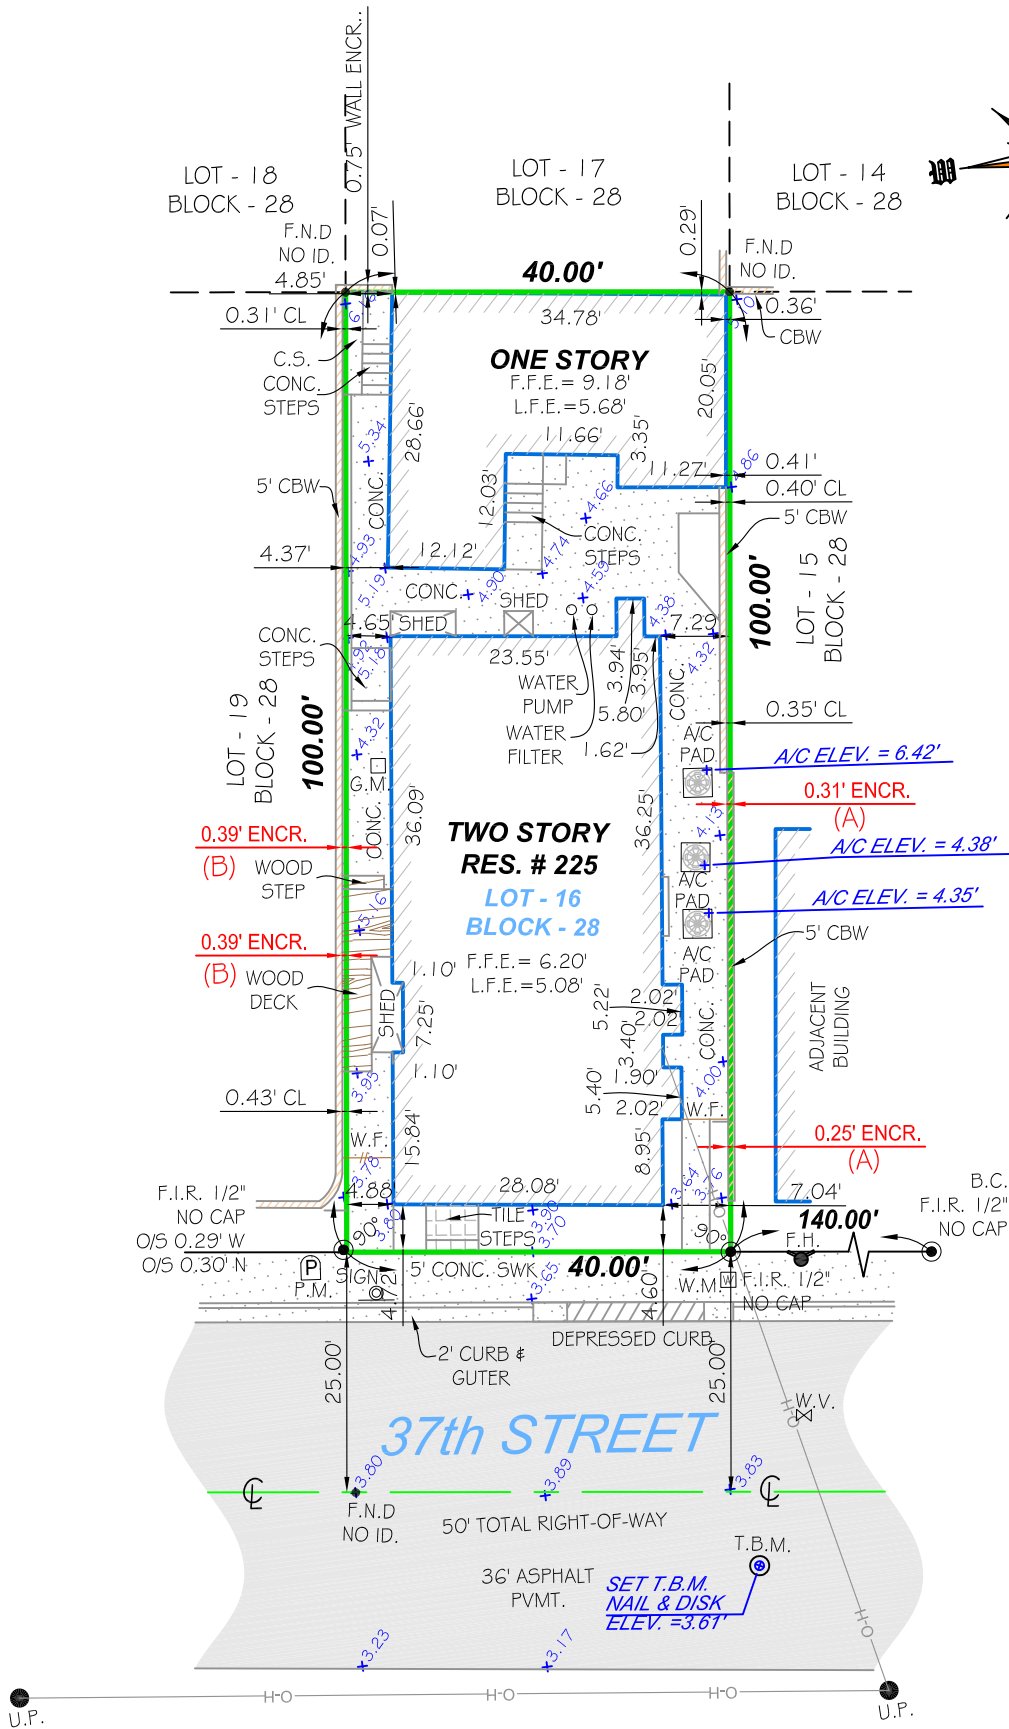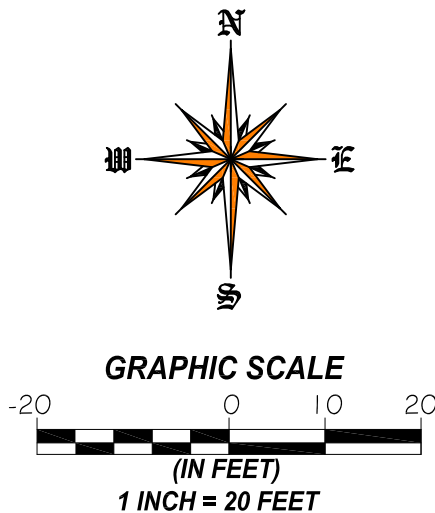

ABBREVIATIONS AND MEANINGS

A = ARC	O.H. = OVERHEAD
A/C = AIR CONDITIONER PAD	O.H.L. = OVERHEAD UTILITY LINES
A.E. = ANCHOR EASEMENT	O.R.B. = OFFICIAL RECORDS BOOK
AR = ALUMINUM ROOF	O.V.H. = OVERHANG
ASPH. = ASPHALT	P.V.M.T. = PAVEMENT
B.C. = BLOCK CORNER	PL = PLASTER
B.C.R. = BROWARD COUNTY RECORDS	PL = PROPERTY LINE
B.L.D.G. = BUILDING	P.C.C. = POINT OF COMPOUND CURVE
B.M. = BENCH MARK	P.C. = POINT OF CURVE
B.O.B. = BASIS OF BEARINGS	PT. = POINT OF TANGENCY
B.S.L. = BUILDING SETBACK LINE	POC = POINT OF COMMENCEMENT
C = CALCULATED	POB = POINT OF BEGINNING
C.B. = CATCH BASIN	P.R.C. = POINT OF REVERSE CURVE
C.B.S. = CONCRETE BLOCK STRUCTURE	P.B. = PLAT BOOK
CBW = CONCRETE BLOCK WALL	PG. = PAGE
CH = CHORD	P.W.Y. = PARKWAY
CH.B. = CHORD BEARING	PRM. = PERMANENT REFERENCE MONUMENT
CL = CLEAR	R. = RECORDED DISTANCE
C.L.F. = CHAIN LINK FENCE	RR = RAIL ROAD
C.M.E. = CANAL MAINTENANCE EASEMENTS	RES. = RESIDENCE
CONC. = CONCRETE	PROP. COR. = PROPERTY CORNER
C.P. = CONC. PORCH	RAW = RIGHT-OF-WAY
C.S. = CONCRETE SLAB	R.P. = RADIUS POINT
C.U.P. = CONC. UTILITY POLE	RSE = RANGE
C.W. = CONCRETE WALK	SEC. = SECTION
D.E. = DRAINAGE EASEMENT	STY. = STORY
D.M.E. = DRAINAGE MAINTENANCE EASEMENTS	SWK. = SIDEWALK
DRIVE = DRIVEWAY	S.I.P. = SET IRON PIPE I.B. #7806
* = DEGREES	S.P. = SCREENED PORCH
E = EAST	S. = SOUTH
EB = ELECTRIC BOX	S. = SECONDS
E.T.P. = ELECTRIC TRANSFORMER PAD	T = TANGENT
ELEV. = ELEVATION	TB = TELEPHONE BOOTH
ENCR. = ENCROACHMENT	T.U.E. = TECHNOLOGY UTILITY EASEMENT
F.H. = FIRE HYDRANT	T.S.B. = TRAFFIC SIGNAL BOX
F.I.P. = FOUND IRON PIPE	T.S.P. = TRAFFIC SIGNAL POLE
F.I.R. = FOUND IRON ROD	TWP. = TOWNSHIP
F.F.E. = FINISHED FLOOR ELEVATION	UTIL. = UTILITY
F.N.D. = FOUND NAIL & DISK	U.P. = UTILITY POLE
FR = FRAME	W.M. = WATER METER
FT = FEET	W.F. = WOOD FENCE
FNIP = FEDERAL NATIONAL INSURANCE	W.R. = WOOD ROOF
F.N. = FOUND NAIL	W.M. = WATER METER
G.M. = GAS METER	W.F. = WOOD FENCE
H. = HIGH (HEIGHT)	W.R. = WOOD ROOF
I.C.V. = IRRIGATION CONTROL VALVE	W.S. = WOOD SHED
I.F. = IRON FENCE	W. = WEST
IN. & EG. = INGRESS AND EGRESS EASEMENT	E = CENTER LINE
L.D. = Certificate of Authorization I.B. #7806	Δ = CENTRAL ANGLE
L.P. = LIGHT POLE	* = ANGLE
L.F.E. = LOWEST FLOOR ELEVATION	
L.M.E. = LAKE MAINTENANCE EASEMENT	
' = MINUTES	
M. = MEASURED DISTANCE	
MB = MAIL BOX	
M.D.C.R. = MIAMI DADE COUNTY RECORDS	
M.E. = MAINTENANCE EASEMENTS	
MON. = MONUMENT LINE	
MY = MAINLINE	
ML = MONUMENT LINE	
N.A.P. = NOT A PART OF	
NGVD = NATIONAL GEODETIC VERTICAL DATUM	
N. = NORTH	
N.T.S. = NOT TO SCALE	
#NO. = NUMBER	
O/S = OFFSET	



LEGAL NOTES TO ACCOMPANY SKETCH OF SURVEY :

- THERE MAY BE EASEMENTS RECORDED IN THE PUBLIC RECORDS NOT SHOWN ON THIS SURVEY.
- EXAMINATIONS OF THE ABSTRACT OF TITLE WILL HAVE TO BE MADE TO DETERMINE RECORDED INSTRUMENTS, IF ANY, AFFECTING THE PROPERTY.
- THIS SURVEY IS SUBJECT TO DEDICATIONS, LIMITATIONS, RESTRICTIONS, RESERVATIONS OR EASEMENTS OF RECORD.
- LEGAL DESCRIPTIONS PROVIDED BY CLIENT OR ATTESTING TITLE COMPANY.
- BOUNDARY SURVEY MEANS A DRAWING AND/ OR A GRAPHIC REPRESENTATION OF THE SURVEY WORK PERFORMED IN THE FIELD, COULD BE DRAWN AT A SHOWN SCALE AND/OR NOT TO SCALE; THE WALLS OR FENCES MAY BE EXAGGERATED FOR CLARITY PURPOSES.
- EASEMENTS AS SHOWN ARE PER PLAT BOOK, UNLESS DEPICTED OTHERWISE.
- THE TERM "ENCROACHMENT" MEANS VISIBLE AND ABOVE GROUND ENCROACHMENTS.
- ARCHITECTS SHALL VERIFY ZONING REGULATIONS, RESTRICTIONS, SETBACKS AND WILL BE RESPONSIBLE FOR SUBMITTING
- PLOT PLANS WITH CORRECT INFORMATION FOR "APPROVAL FOR AUTHORIZATION" TO THE PROPER AUTHORITIES IN NEW CONSTRUCTION.
- UNLESS OTHERWISE NOTED, THIS FIRM HAS NOT ATTEMPTED TO LOCATE FOOTING AND/OR FOUNDATIONS.
- FENCE OWNERSHIP NOT DETERMINED.
- THIS PLAN OF SURVEY, HAS BEEN PREPARED FOR THE EXCLUSIVE USE OF THE ENTITIES NAMED HEREON, THE CERTIFICATE
- DOES NOT EXTEND TO ANY UNNAMED PARTY.

FLOOD ZONE INFORMATION:

THE NFIP FLOOD MAPS HAVE DESIGNATED THE HEREIN DESCRIBED LAND TO BE SITUATED IN:
FLOOD ZONE: "VE"
BASE FLOOD ELEVATION: 11 FEET
COMMUNITY: 120651
PANEL: 0336
SUFFIX: L
DATE OF FIRM: 09/11/2009
THE SUBJECT PROPERTY DOES NOT LIE IN A SPECIAL FLOOD HAZARD AREA.

SURVEYOR'S NOTES:

1. IF SHOWN, BEARINGS ARE REFERRED TO AN ASSUMED MERIDIAN, BY SAID PLAT IN THE DESCRIPTION OF THE PROPERTY, IF NOT, BEARINGS ARE THEN REFERRED TO COUNTY, TOWNSHIP MAPS.
2. THE CLOSURE IN THE BOUNDARY SURVEY IS ABOVE 1:7500 FT.
3. CERTIFICATE OF AUTHORIZATION I.B. # 7806.

SURVEYOR'S CERTIFICATION:

I HEREBY CERTIFY: THIS "BOUNDARY SURVEY" OF THE PROPERTY DESCRIBED HEREON, HAS RECENTLY BEEN SURVEYED AND DRAWN UNDER MY SUPERVISION, AND COMPLIES WITH THE STANDARDS OF PRACTICE AS SET FORTH BY THE FLORIDA BOARD OF PROFESSIONAL LAND SURVEYORS IN CHAPTER 5J-17, FLORIDA ADMINISTRATIVE CODE PURSUANT TO 472.027, FLORIDA STATUTES.

ENCROACHMENT NOTES:

- A. EAST SIDE OF THE SUBJECT PROPERTY NEIGHBOR'S CONCRETE WALL IS ENCROACHING INTO THE SUBJECT PROPERTY.
- B. WEST SIDE OF THE SUBJECT PROPERTY WOOD DECK, WOOD FENCE AND CONCRETE WALK IS ENCROACHING INTO THE NEIGHBOR'S PROPERTY.

ADDITIONAL NOTES:


1. ALL ELEVATIONS SHOWN ARE REFERRED TO NATIONAL GEODETIC VERTICAL DATUM OF 1929 MIAMI-DADE COUNTY BENCH MARK # B-313, LOCATOR NO. 3424 SE; ELEVATION IS 4.33 FEET OF N.G.V.D. OF 1929

CERTIFICATION:

CONGREGATION KAHAL MAGLEI ZEDEK

LEGAL DESCRIPTION:

LOT 16, BLOCK 28, OF AMENDED PLAT OF OCEAN FRONT PROPERTY OF THE MIAMI BEACH IMPROVEMENT CO., ACCORDING TO THE PLAT THEREOF AS RECORDED IN PLAT BOOK 5, PAGE 7 AND 8, OF THE PUBLIC RECORDS OF DADE COUNTY, FLORIDA, A/K/A 225 - 37th STREET, MIAMI BEACH, FLORIDA.

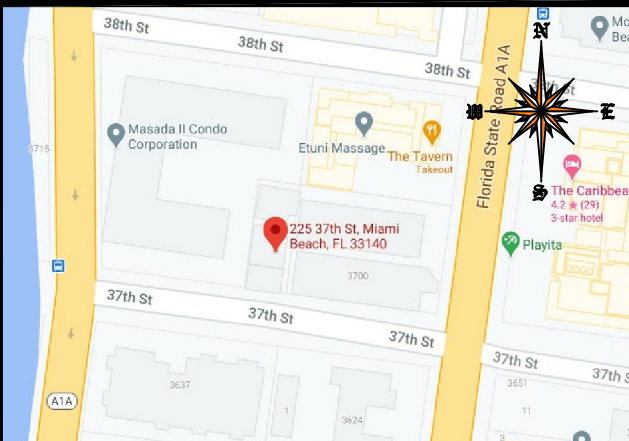

LOCATION SKETCH
SCALE = N.T.S.

BY: **JOHN IBARRA** (DATE OF FIELD WORK) **03/29/2021**

PROFESSIONAL LAND SURVEYOR NO.: 5204 STATE OF FLORIDA
(NOT VALID WITHOUT THE SIGNATURE AND THE ORIGINAL RAISED SEAL OF A FLORIDA LICENSED SURVEYOR AND MAPPER).

REVISED ON: _____
REVISED ON: _____

DRAWN BY:	JB	SEAL L.B.# 7806
FIELD DATE:	03/29/2021	
SURVEY NO:	21-001121-1	
SHEET:	1 OF 1	

MULTIFAMILY - COMMERCIAL - ZONING DATA SHEET

ITEM #	Project Information			
1	Address:	225 37TH STREET MIAMI BEACH FLORIDA 33140		
2	Board and file numbers :	PB 21-0476 PREVIOUS FILE #1728 ZBA MEETING OF APRIL 4TH, 1986		
3	Folio number(s):	02-3226-001-1720		
4	Year constructed:	1930	Zoning District:	RM-2
5	Based Flood Elevation:	7' NGVD	Grade value in NGVD:	3.65' NGVD
6	Adjusted grade (Flood+Grade/2):	GROUND FLOOR =10.65' NGVD	Lot Area:	3,991.71 SF
7	Lot width:	40 SF	Lot Depth:	100 SF
8	Minimum Unit Size	REQ. 400 SF PROV. 1,709 SF	Average Unit Size	REQ. 550 PROVIDED 2,025 SF
9	Existing use:	TEMPLE + RESIDENTIAL	Proposed use:	TEMPLE + RESIDENTIAL

	Zoning Information / Calculations	Maximum	Existing	Proposed	Deficiencies
10	Height	75 FT.	25.6 FT.	39.5 FT.	
11	Number of Stories		2	3 (plus basement in the back)	
12	FAR	2.00 = 7,983.42 SF	2,872 SF	7,897 SF	
13	Gross square footage		2,872 SF	7,879 SF	
14	Square Footage by use	N/A	TEMPLE 2,475 SF, RESIDENTIAL 1,685 SF	TEMPLE 3,245 SF, COMMON AREA 602 SF, RESIDENTIAL 4,051 SF	
15	Number of units Residential	N/A	2 UNITS	2 UNITS	
16	Number of units Hotel	N/A	N/A	N/A	
17	Number of seats	N/A	40 SEATS	65 SEATS	
18	Occupancy load	N/A	76 PEOPLE	90 PEOPLE	SEE CHART ON SITE PLAN A.2.1

	Setbacks	Required	Existing	Proposed	Deficiencies
	Subterranean:				
19	Front Setback:	20 FT	4.60'	4.60' *	ENCROACHING SB BY 15.4'
20	Side Setback:	7' - 6"	0' / 7.29'	7.29' *	ENCROACHING SB BY 3"
21	Side Setback:	7' - 6"	4.65'	4.65' *	ENCROACHING SB BY 2'-7"
22	Side Setback facing street:	10' - 0"	N/A	N/A	
23	Rear Setback:	10% LOT DEPTH = 10 FT	N/A	0' - 0" *	ENCROACHING SB BY 10'-0"
	At Grade Parking:				
24	Front Setback:	20 FT	N/A	N/A	
25	Side Setback:	5 FT	N/A	N/A	
26	Side Setback:	5 FT	N/A	N/A	
27	Side Setback facing street:	5 FT	N/A	N/A	
28	Rear Setback:	0 FT	N/A	N/A	
	Pedestal:				
29	Front Setback:	20 FT	4.60'	4.60' *	ENCROACHING SB BY 15.4'
30	Side Setback:	7' - 6"	0' / 7.29'	7.29' *	ENCROACHING SB BY 3"
31	Side Setback:	7' - 6"	4.65'	4.65' *	ENCROACHING SB BY 2'-7"
32	Side Setback facing street:	N/A	N/A	N/A	
33	Rear Setback:	10% LOT DEPTH = 10 FT	0' - 0"	0' - 0"	ENCROACHING SB BY 10'-0"
	Tower:				
34	Front Setback:	20 FT	4.60'	4.60' *	ENCROACHING SB BY 15.4'
35	Side Setback:	7' - 6"	0' / 7.29'	7.29' *	ENCROACHING SB BY 3"

#	Setbacks	Required	Existing	Proposed	Deficiencies
36	Side Setback:	7' - 6"	4.65'	4.65' *	ENCROACHING SB BY 2'-7"
37	Side Setback facing street:	10' - 0" MIN.	N/A	N/A	
38	Rear Setback:	15% LOT DEPTH = 15 FT	0' - 0"	0' - 0" *	ENCROACHING SB BY 15'-0"

	Parking	Required	Existing	Proposed	Deficiencies
39	Parking district	PARKING DISTRICT 1			
40	Total # of parking spaces	15 SPACES	0 SPACES	0 SPACES	**
41	# of parking spaces per use (Provide a separate chart for a breakdown calculation)	RESIDENTIAL: 2 SPACES PER DWE/UNIT= 4 RELIGIOUS: 1 SPACE PER EVERY 6 SEATS= 11 TOTAL 15 SPACES REQ.		NO PARKING EXISTING NOR PROVIDED. **	
42	# of parking spaces per level (Provide a separate chart for a breakdown calculation)	GROUND FLOOR: 1 SPACE PER EVERY 6 SEATS= 65 SEATS/6=11 2ND FLOOR 2 SPACES PER DWE/UNIT= 2 3RD FLOOR 2 SPACES PER DWE/UNIT= 2 TOTAL 15 SPACES REQ.		NO PARKING EXISTING NOR PROVIDED. **	
43	Parking Space Dimensions	N/A	N/A	N/A	
44	Parking Space configuration (45o, 60o, 90o, Parallel)	N/A	N/A	N/A	
45	ADA Spaces	N/A	N/A	N/A	
46	Tandem Spaces	N/A	N/A	N/A	
47	Drive aisle width	N/A	N/A	N/A	
48	Valet drop off and pick up	N/A	N/A	N/A	
49	Loading zones and Trash collection areas				
50	Bicycle parking, location and Number of racks	N/A	N/A	N/A	

	Restaurants, Cafes, Bars, Lounges, Nightclubs	Required	Existing	Proposed	Deficiencies
51	Type of use	N/A	N/A	N/A	
52	Number of seats located outside on private property	N/A	N/A	N/A	
53	Number of seats inside	N/A	N/A	N/A	
54	Total number of seats	N/A	N/A	N/A	
55	Total number of seats per venue (Provide a separate chart for a breakdown calculation)	N/A	N/A	N/A	
56	Total occupant content	N/A	N/A	N/A	
57	Occupant content per venue (Provide a separate chart for a breakdown calculation)	N/A	N/A	N/A	

58	Proposed hours of operation	8 AM TO 12 PM AND 6PM TO 9:30PM	
59	Is this an NIE? (Neighborhood impact establishment, see CMB 141-1361)		
60	Is dancing and/or entertainment proposed ? (see CMB 141-1361)	NO	
61	Is this a contributing building?	YES	
62	Located within a Local Historic District?	YES	
Additional data or information must be presented in the format outlined in this section			

* = VARIANCE REQUIRED

** = 16 OFF STREET PARKING SPACES WAIVER OBTAINED AS PER FILE # 1728 -ZBA MEETING APRIL 4TH 1986 SEE PAGE A0.4

○ ZONING CHART
1/4" = 1'-0"

ADAS DEJ SYNAGOGUE
225 37TH ST. MIAMI BEACH FL. 33139

FIRST SUBMITTAL
NOV. 30th 2021

1 CITY COMMENTS 11/29/2021

ZONING DATA

Project #21-009

A0.1



PHOTO #1 = SOUTH VIEW



PHOTO #2 = SOUTH WEST VIEW



PHOTO #3 = SOUTH EAST VIEW



PHOTO #4 = BACK STRUCTURE RITUAL BATH

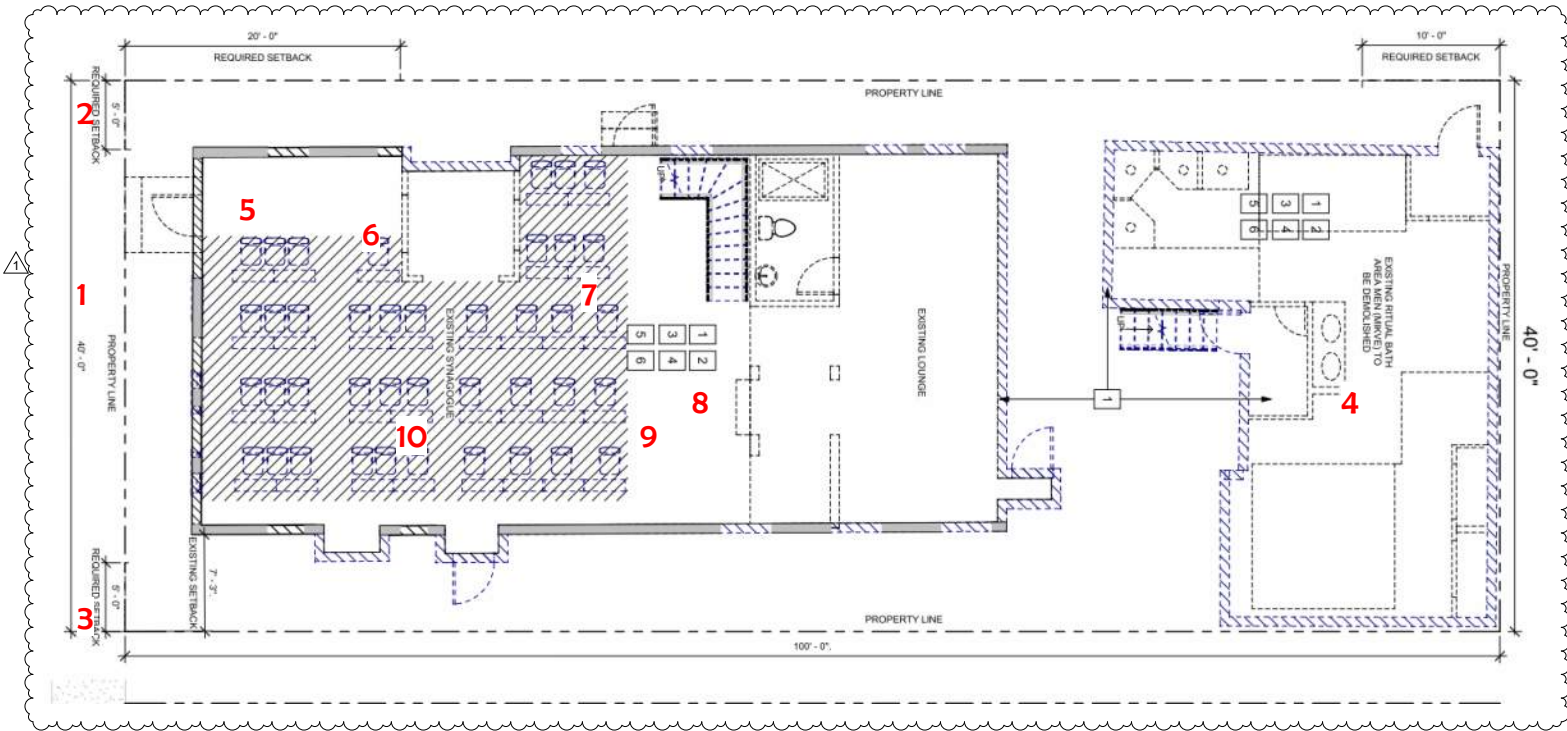




PHOTO #5 = TEMPLE ACCESS FOYER



PHOTO #6 = TEMPLE



PHOTO #7 = TEMPLE SIDE ENTRY

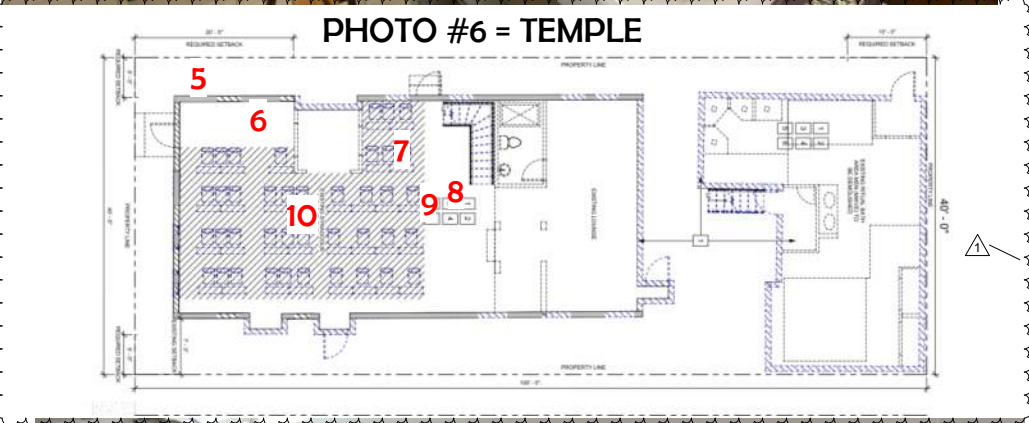


PHOTO #8 = TEMPLE BACK ROOM



PHOTO #9 = TEMPLE BACK ROOM



PHOTO #10 = TEMPLE



AERIAL FROM 1929 SHOWN THE RESIDENCE AND REAR GARAGE

Owner **LEE TRAMMELL** Permit No. **2636** Cost \$ **10,000**
Lot **16** Block **28** Subdivision **M. B. IMPROV. CO.** Address **225 Thirty-Seventh Street**
General Contractor **S. J. Hale** OCEAN FRONT
Architect **S. J. Hale** **17166**
Zoning Regulations: Use **RE** Area **15** Engineer
Building Size: Front **28'** Depth **36'** Lot Size **40 x 100**
Certificate of Occupancy No. Use **RESIDENCE** Height
Type of Construction **CBS** Foundation **Reinforced concrete** Roof **?** Date **Sept. 13, 1928**
PLUMBING Contractor **Brady** 1----- Sewer Connection -- -- --Date **Dec. 6, 1928**
J.L. Brady --- 9 Fixtures - Sept. 28, 1928 Temporary Water Closet
Water Closets Swimming Pool Traps Down Spouts
Lavatories Steam or Hot Water Boilers Wells
Bath Tubs
Showers
Urinals
Sinks
Dish Washing Machine
Laundry Trays
Laundry Washing Machines
Drinking Fountains
Floor Drains
Grease Traps
Safe Wastes
AIR CONDITIONING Contractor
SEPTIC TANK Contractor
OIL BURNER Contractor
SPRINKLER Contractor
ELECTRICAL Contractor
OUTLETS Switches Ranges Temporary Service
Lights Irons Neon Transformers
Receptacles Refrigerators Sign Outlets
Fans Meter Change
Motors Centers of Distributions
HEATERS Water Appliances Service
Space Appliances Violations
URES **25**----- Electrical Contractor **New1** Corp:-----Date **12/15/1928**
GAS Contractor Date
Gas Ranges Gas Frylators
Gas Water Heaters Gas Pressing Machine
Gas Space Heaters Gas Vents for Stove
Gas Refrigerators
Gas Steam Tables
Gas Broilers
GAS Rough APPROVAL
GAS FINAL APPROVAL
ROUGH APPROVAL
FINAL APPROVAL
OVER




ALTERATIONS & ADDITIONS
Building Permits: #32766 30 lin. ft. of 5'8" block wall: Footing 8x16 with 3 5/8" steel rods: Owner builds \$ 150.00 June 8, 1950
#65620 Mrs. Kay Gould, owner: Paint exterior of building - \$300.00 - 8/14/61
#73570 Owner, Charles A. Gould: Roof repair - \$150 - 2/15/65 OK Jenks 3/10/65
#75154 Carruth Roofing Co: Reroof - \$1,095 - 12/13/65
#81154 - J. C. Woodruff - Replace Driveway and install two parking spaces - \$750.00 - 10/15/68
#82279 Gustave L. Dresel (Owner): Installation of 3 windows and block in and stucco. Metro Products Approval #3968 \$150 4/29/69
#83781 - Owner - Paint Exterior only. Must comply with Ord. 1060. \$200.00 2/19/70
#85195 - Owner - Replace 3 casement type windows with 3 awning type \$100.00 10/2/70
Plumbing Permits:
#12790 Alexander Orr, Jr: 1 Water closet, 1 Lavatory, 1 Shower, December 1, 1939
#55718-Silver Plumbing- repair on gas stove, repair on water heater-1-25-76
BUILDING PERMITS:
File #1728 - ZBA MEETING OF APRIL 4, 1986: "THE PLACING OF THESE REQUESTS ON THE AGENDA IS CONTINGENT UPON THE APPLICANT OBTAINING A CONDITIONAL USE APPROVAL FROM THE CITY COMMISSION".
APPLICANT REQUESTS THE FOLLOWING VARIANCES RELATING TO THE CONVERSION OF A PORTION OF AN EXISTING RESIDENCE INTO A SYNAGOGUE, THE USE OF AN EXISTING DETACHED STRUCTURE AS AN ACCESSORY USE TO THE SYNAGOGUE, AND THE CONSTRUCTION OF TWO NEW ADDITIONS AT THE SUBJECT PROPERTY:
1. Applicant wishes to waive 14'-6" of the minimum required 20' front yard setback, in order to construct an addition (expansion to the Synagogue).
2. Applicant requests the waiving of 9'-9" of the required 10' rear yard setback, in order to convert a detached structure into an accessory use to the Synagogue, and for the construction of a new addition (Ritual Bath).
3. Applicant wishes to waive 43'-5" of the minimum required 50' east side yard setback, for the partial conversion of the existing residence into a Synagogue.
4. Applicant requests the waiving of 45'-4" of the required 50' west side yard setback for the partial conversion of the residence into a Synagogue.
5. Applicant wishes to waive 49'-5" of the minimum required 50' east side yard setback, for the conversion of the rear structure (detached) into an accessory use to the Synagogue.
6. Applicant requests the waiving of 44'-10" of the required 50' west side yard setback, in order to build an addition (Ritual bath).
7. Applicant wishes to waive all of the required 16 off-street parking spaces for the Synagogue.
GRANTED. SUBJECT TO ALL OF THE RECOMMENDATIONS OF THE PLANNING DIRECTOR AND THE FIRE DEPT. THE FACADE PLANS ARE TO BE APPROVED BY THE PLANNING DEPT. AND BARTON GOLDBERG (AS THE BOARD'S REPRESENTATIVE).

LOT: 16 BLOCK: 28 SUBDIVISION: Amended Map Ocean ADDRESS: 225 W. 37th Street
Front Prop.
ALTERATIONS & ADDITIONS
BUILDING PERMITS
TO: PAUL GIOIA BUILDING SERVICES DIRECTOR JUNE 2, 1987
FROM: JUD KURLANCHEK PLANNING DIRECTOR
SUBJECT: CONGREGATION ADAS DEJ, 225 W. 37TH STREET EXTENSION OF TIME
The applicant received Conditional Use approval from the City Commission on July 9, 1986, with the following conditions:
1. the applicant shall bury all utility lines, cables (from the street to the building), etc.;
2. the front elevations of the expansion shall have a mansard roof with barrel tile to match the roof of the existing building;
3. the Planning Department shall approve a landscape plan prior to the issuance of a building permit, and the installed material prior to the issuance of a Certificate of Occupancy; and,
4. the applicant shall replace the existing fence along the rear and side property lines with a new fence.
This approval expired on January 9, 1987.
Pursuant to Section 7-1, B.Z.A., the applicant has been granted a nine month extension of time to obtain a building permit. The applicant has until October 9, 1987 to obtain the necessary permits to carry out the project as approved under the Conditional Use process.
Please record the above extension of time on the building card of the subject property.
Thank you for your assistance.
JKJ:JGdhm
HM J
PLUMBING PERMITS
ELECTRICAL PERMITS


WAIVERS GRANTED BY BY THE ZONING BOARD APRIL 4TH 1986

CONDITIONAL USE APPROVAL FROM THE CITY COMMISSION JULY 9TH 1986

ORIGINAL PERMIT PLANS BS933179

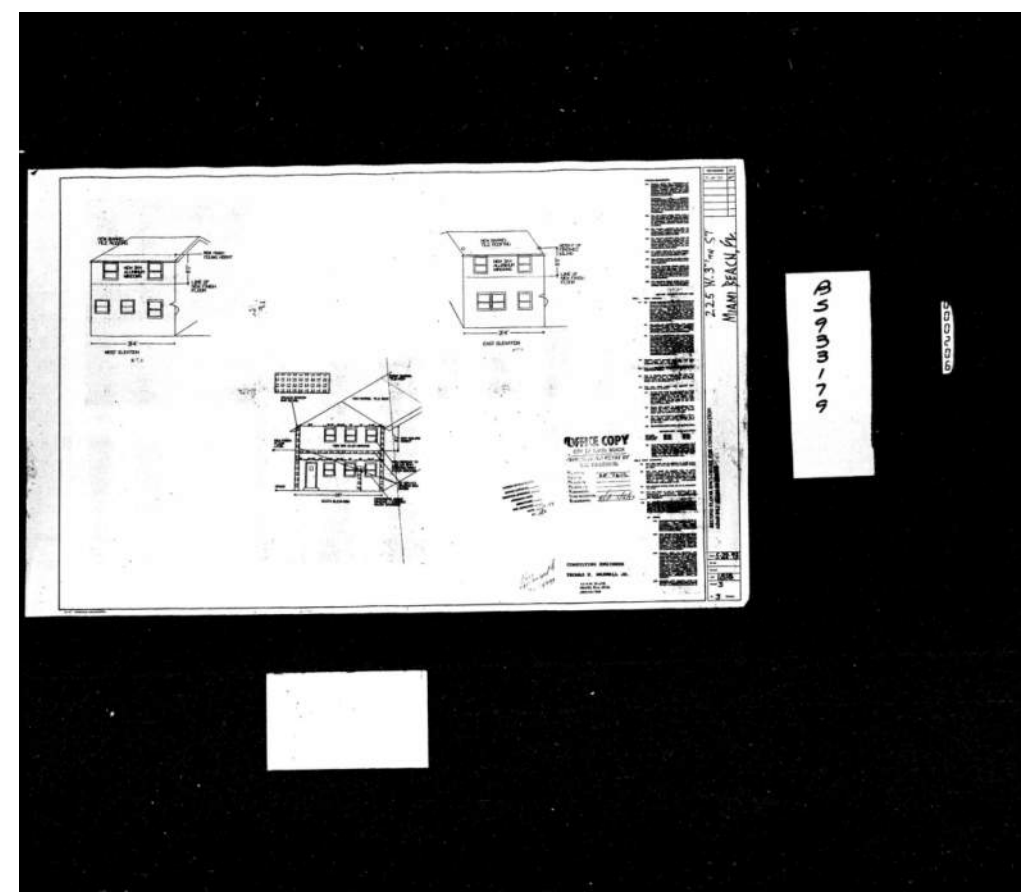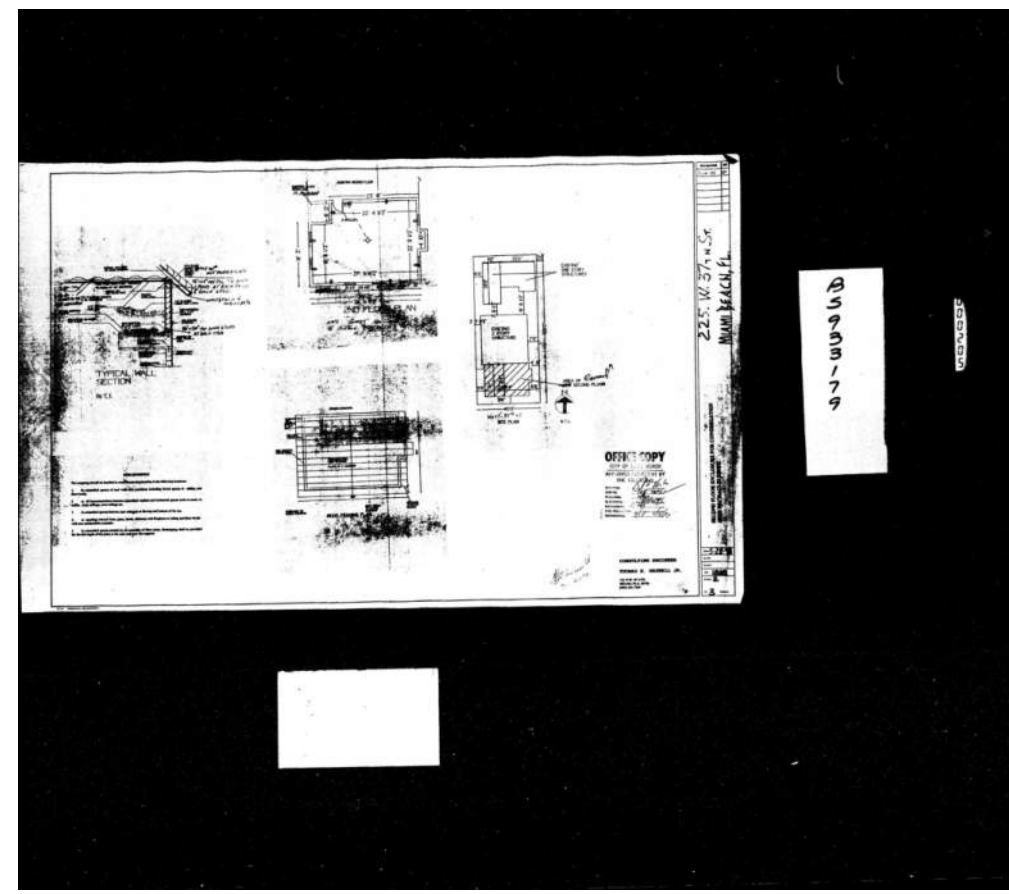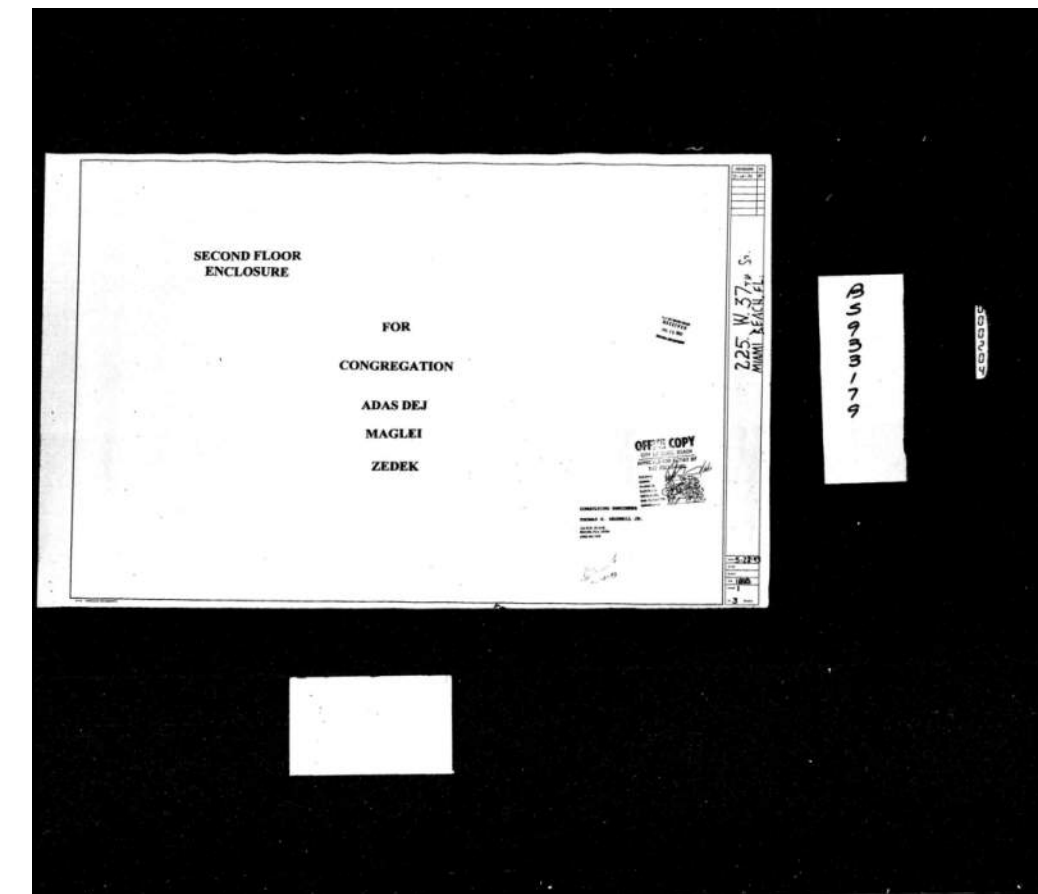


Name: CONGREGATION ADAS DEJ
Address: 225 37TH Street, Miami Beach, Fl 33140

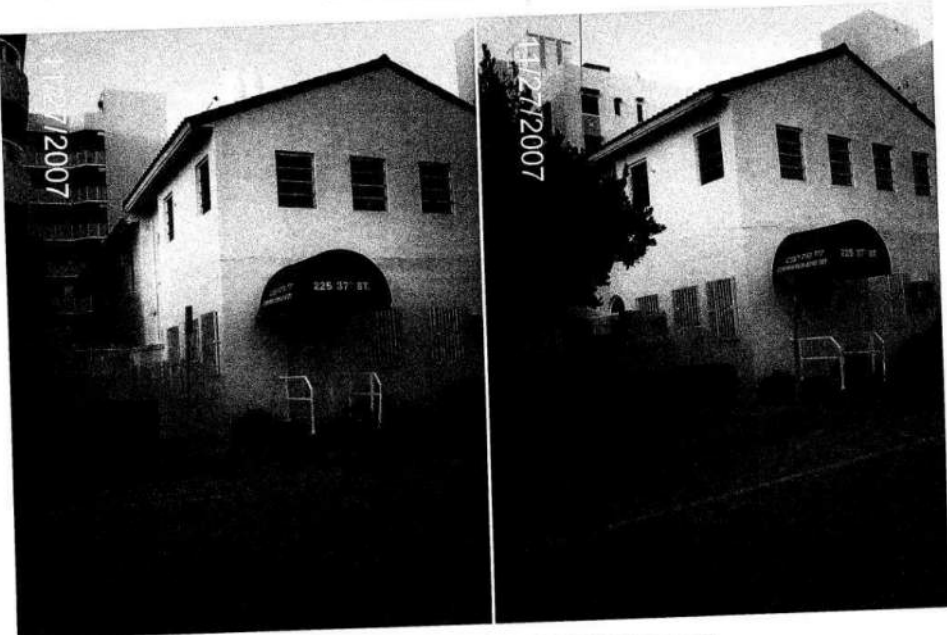


WEST ELEVATION & SIGNAGE (FROM 37TH STREET)
SITE & SURROUNDING AREAS
Taken: 11/27/08

Name: CONGREGATION ADAS DEJ
Address: 225 37TH Street, Miami Beach, Fl 33140

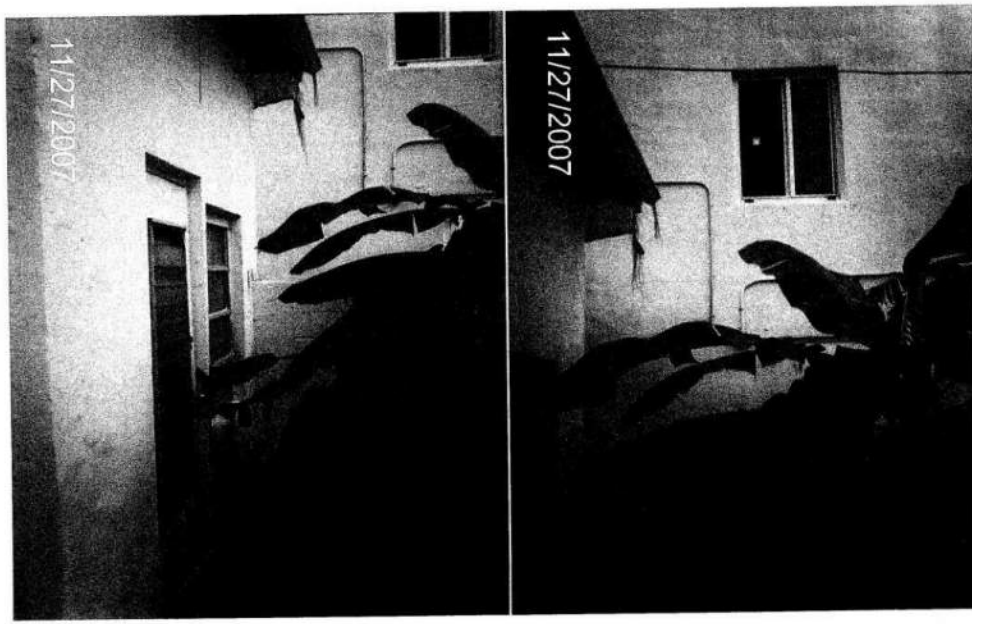



SOUTH ELEVATION OF PROPOSED BLDG FOR RENOVATION
SITE & SURROUNDING AREAS
Taken: 11/27/08

Name: CONGREGATION ADAS DEJ
Address: 225 37TH Street, Miami Beach, Fl 33140

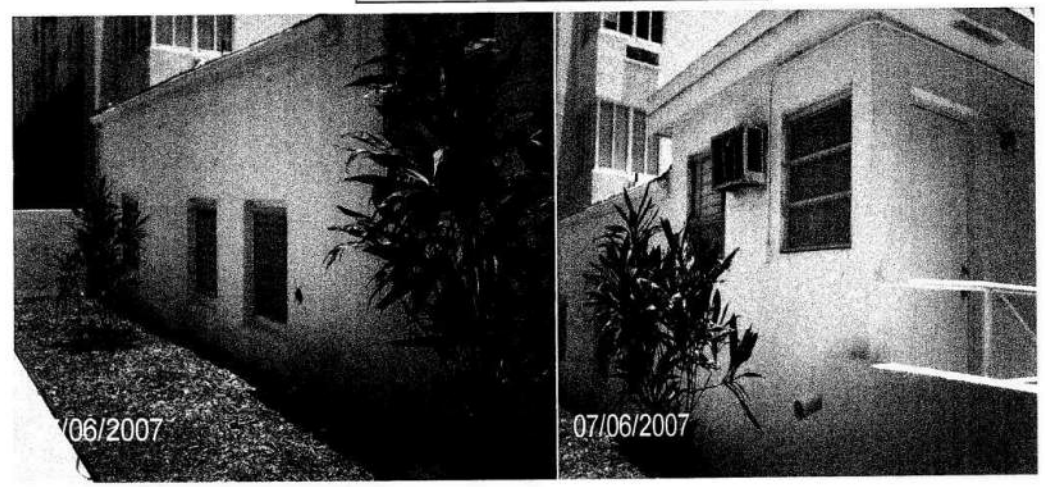


NORTH ELEVATION OF PROPOSED BLDG FOR RENOVATION
SITE & SURROUNDING AREAS
Taken: 07/06/07

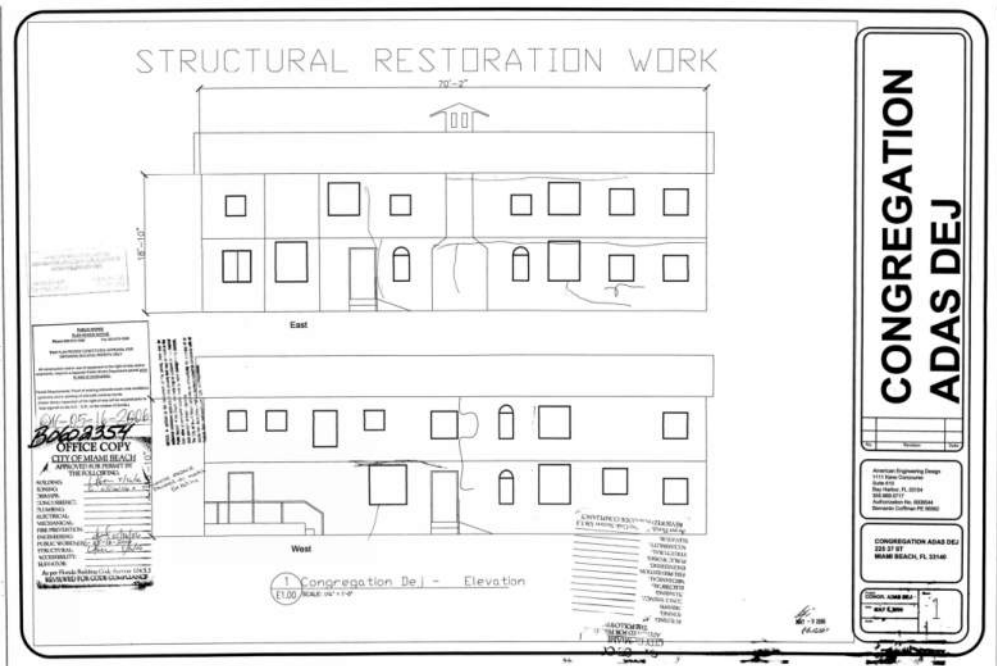

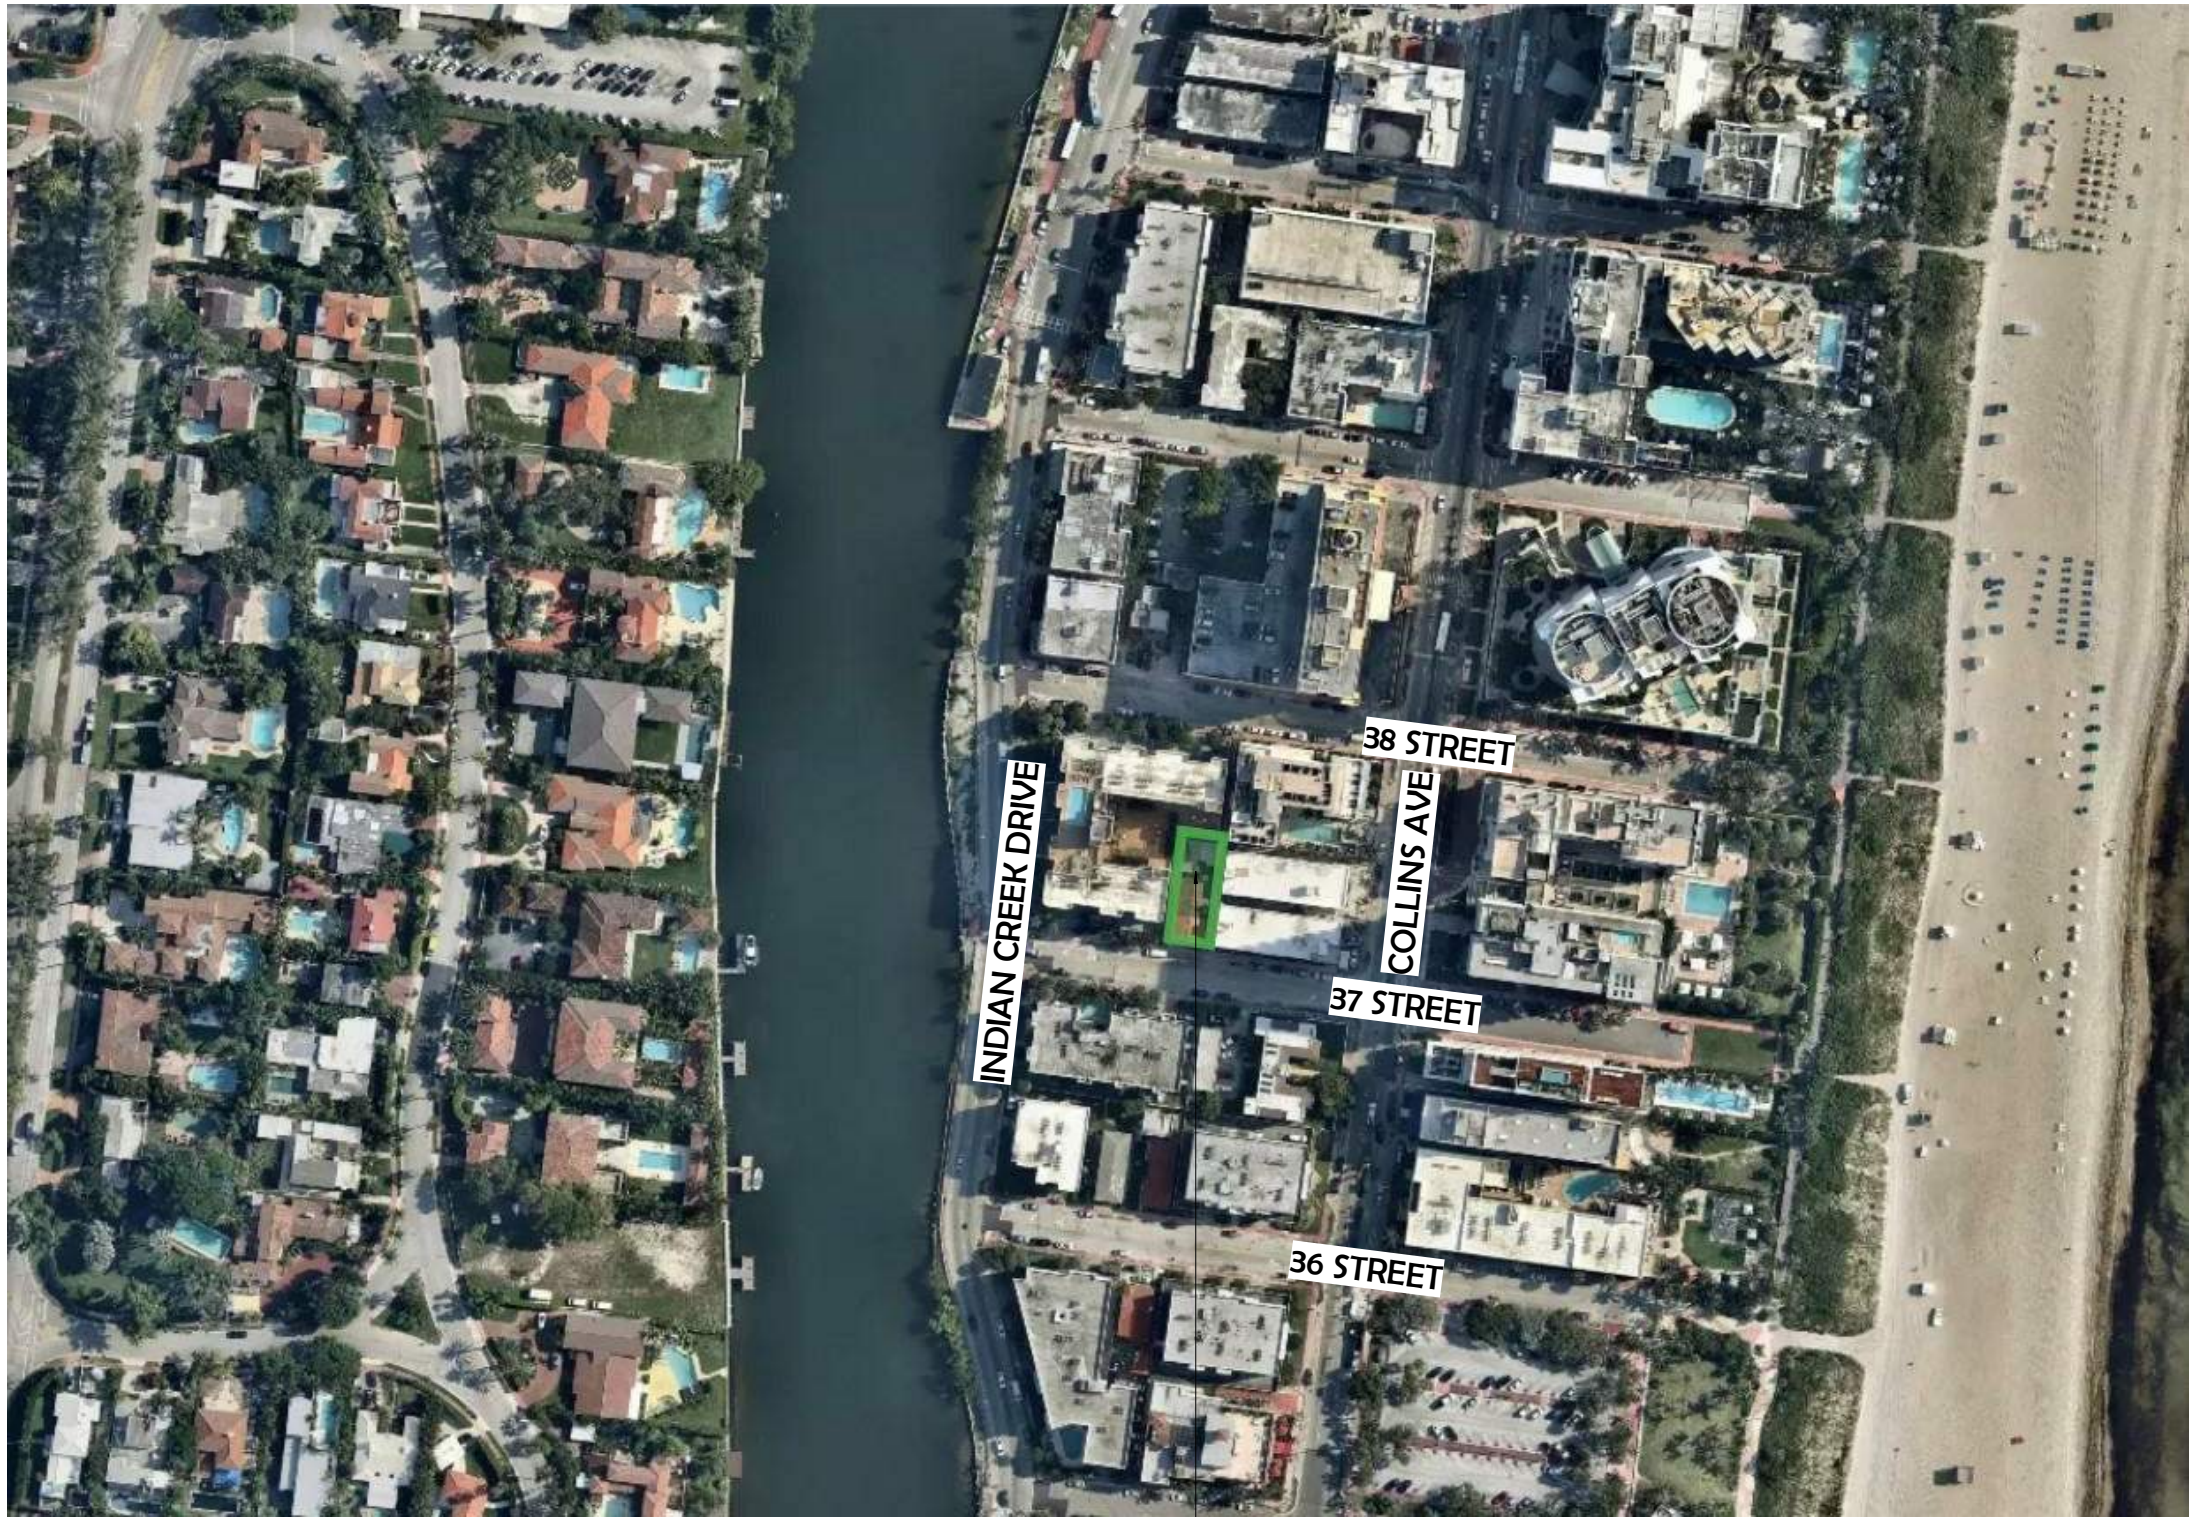


PROJECT LOCATION
225 37 STREET




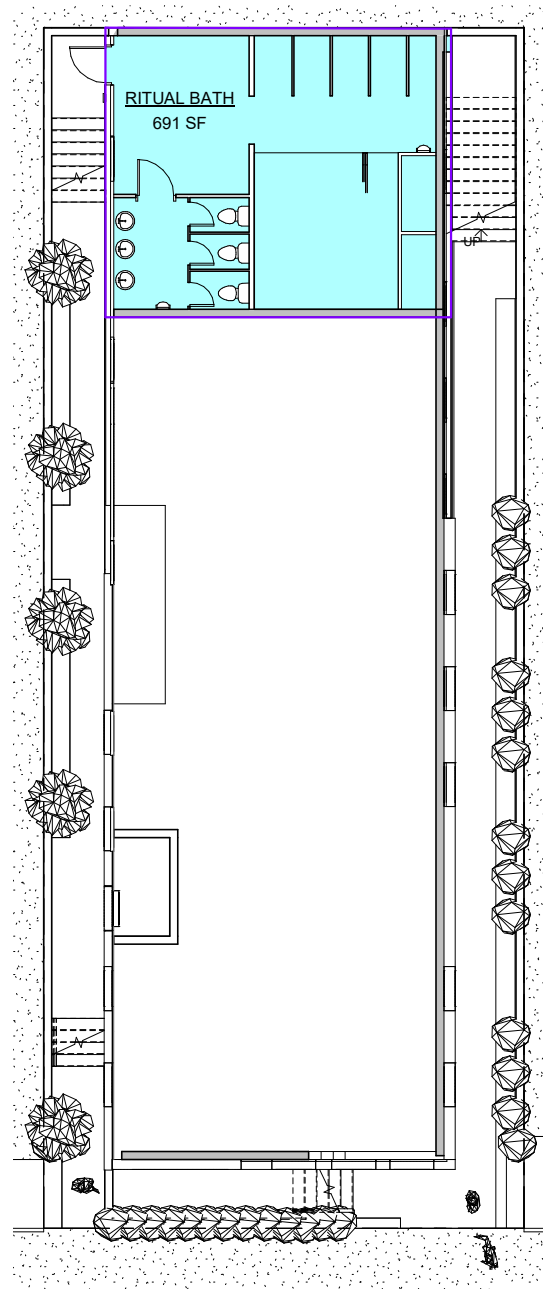


① BASEMENT
1/16" = 1'-0" 691 SF

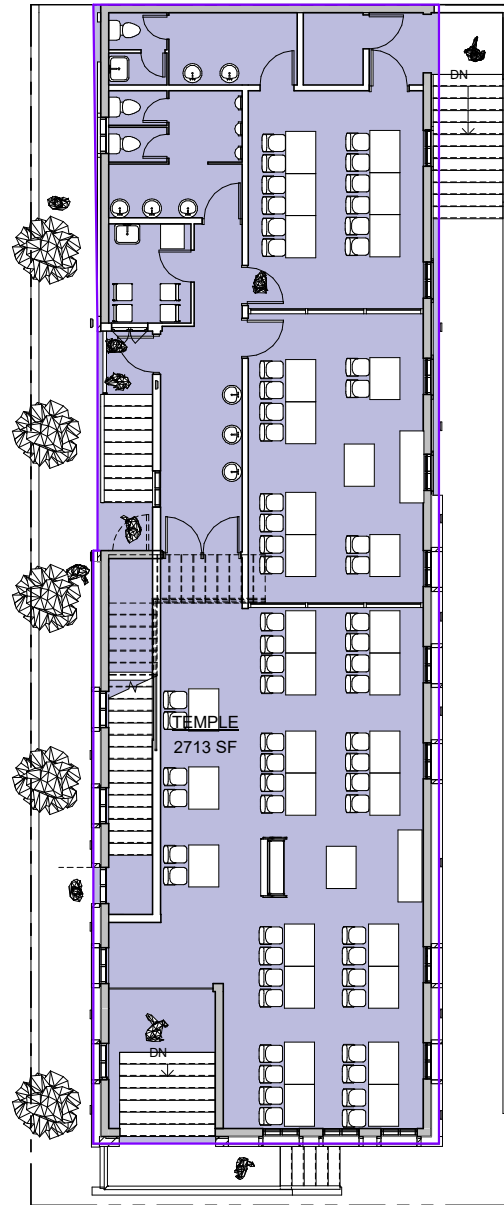

② SHUL
1/16" = 1'-0" 2,713 SF

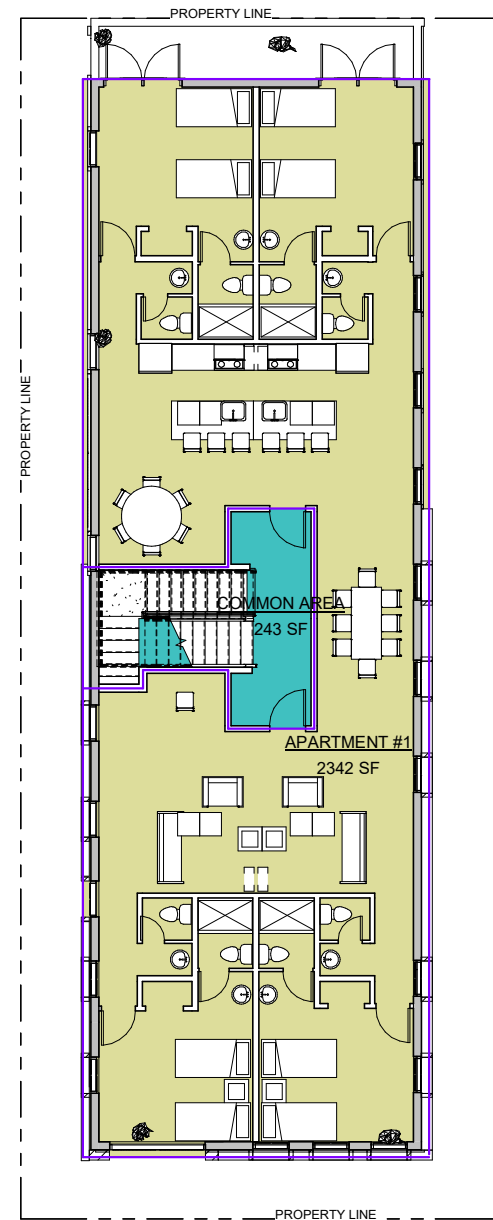

③ APARTMENT
1/16" = 1'-0" 2,584 SF

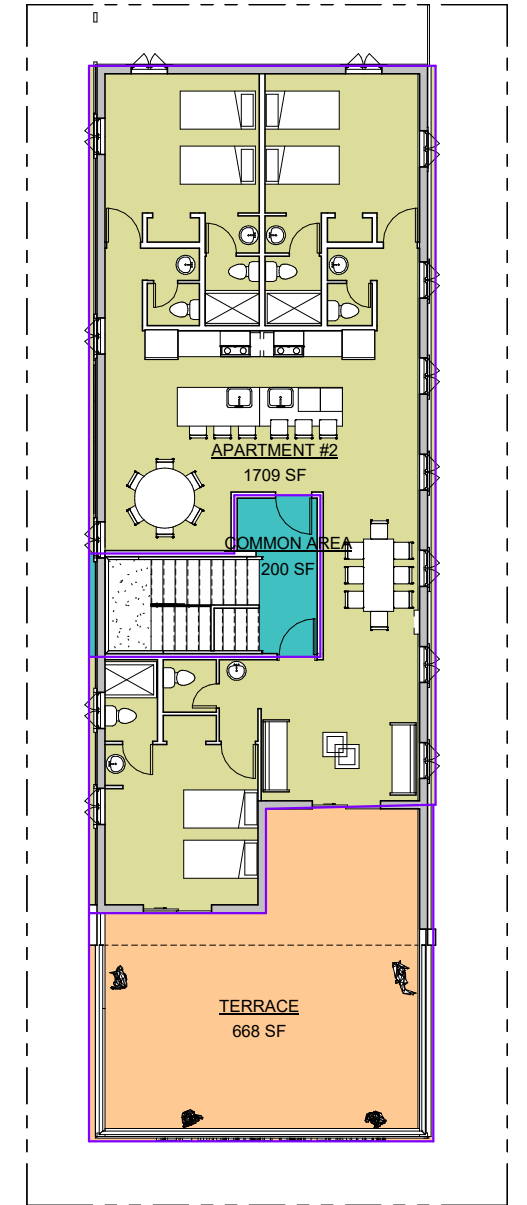

④ ROOF
1/16" = 1'-0" 1,909 SF

LOT SIZE = 3,991.71 SF


MAX F.A.R. 2.0 = 7,983.42 SF

Basement RITUAL BATH=	691.00 SF
Ground Floor TEMPLE =	2,713.00 SF
2nd Level APARTMENT #1 =	2,584.00 SF
3rd Level APARTMENT #2 =	1,909.00 SF
TOTAL F.A.R. PROPOSED=	7,897.00 SF


REQUESTED VARIANCES

- 1) A variance from the rear setback. Required 10'-0". Proposed zero.
- 2) A variance from the east side. Required:7'-6". Proposed zero at stairs on the Northeast. and 7.29' at the building
- 3) A variance from the west side setback. Required 7'-6". Proposed: 4.65'
- 4) A variance to exceed the maximum 25% projection allowed for an access stair and platform in the front.
- 5) A variance from maximum 30% building structures in the rear yard.


See Zoning Data Chart on Page A0.1

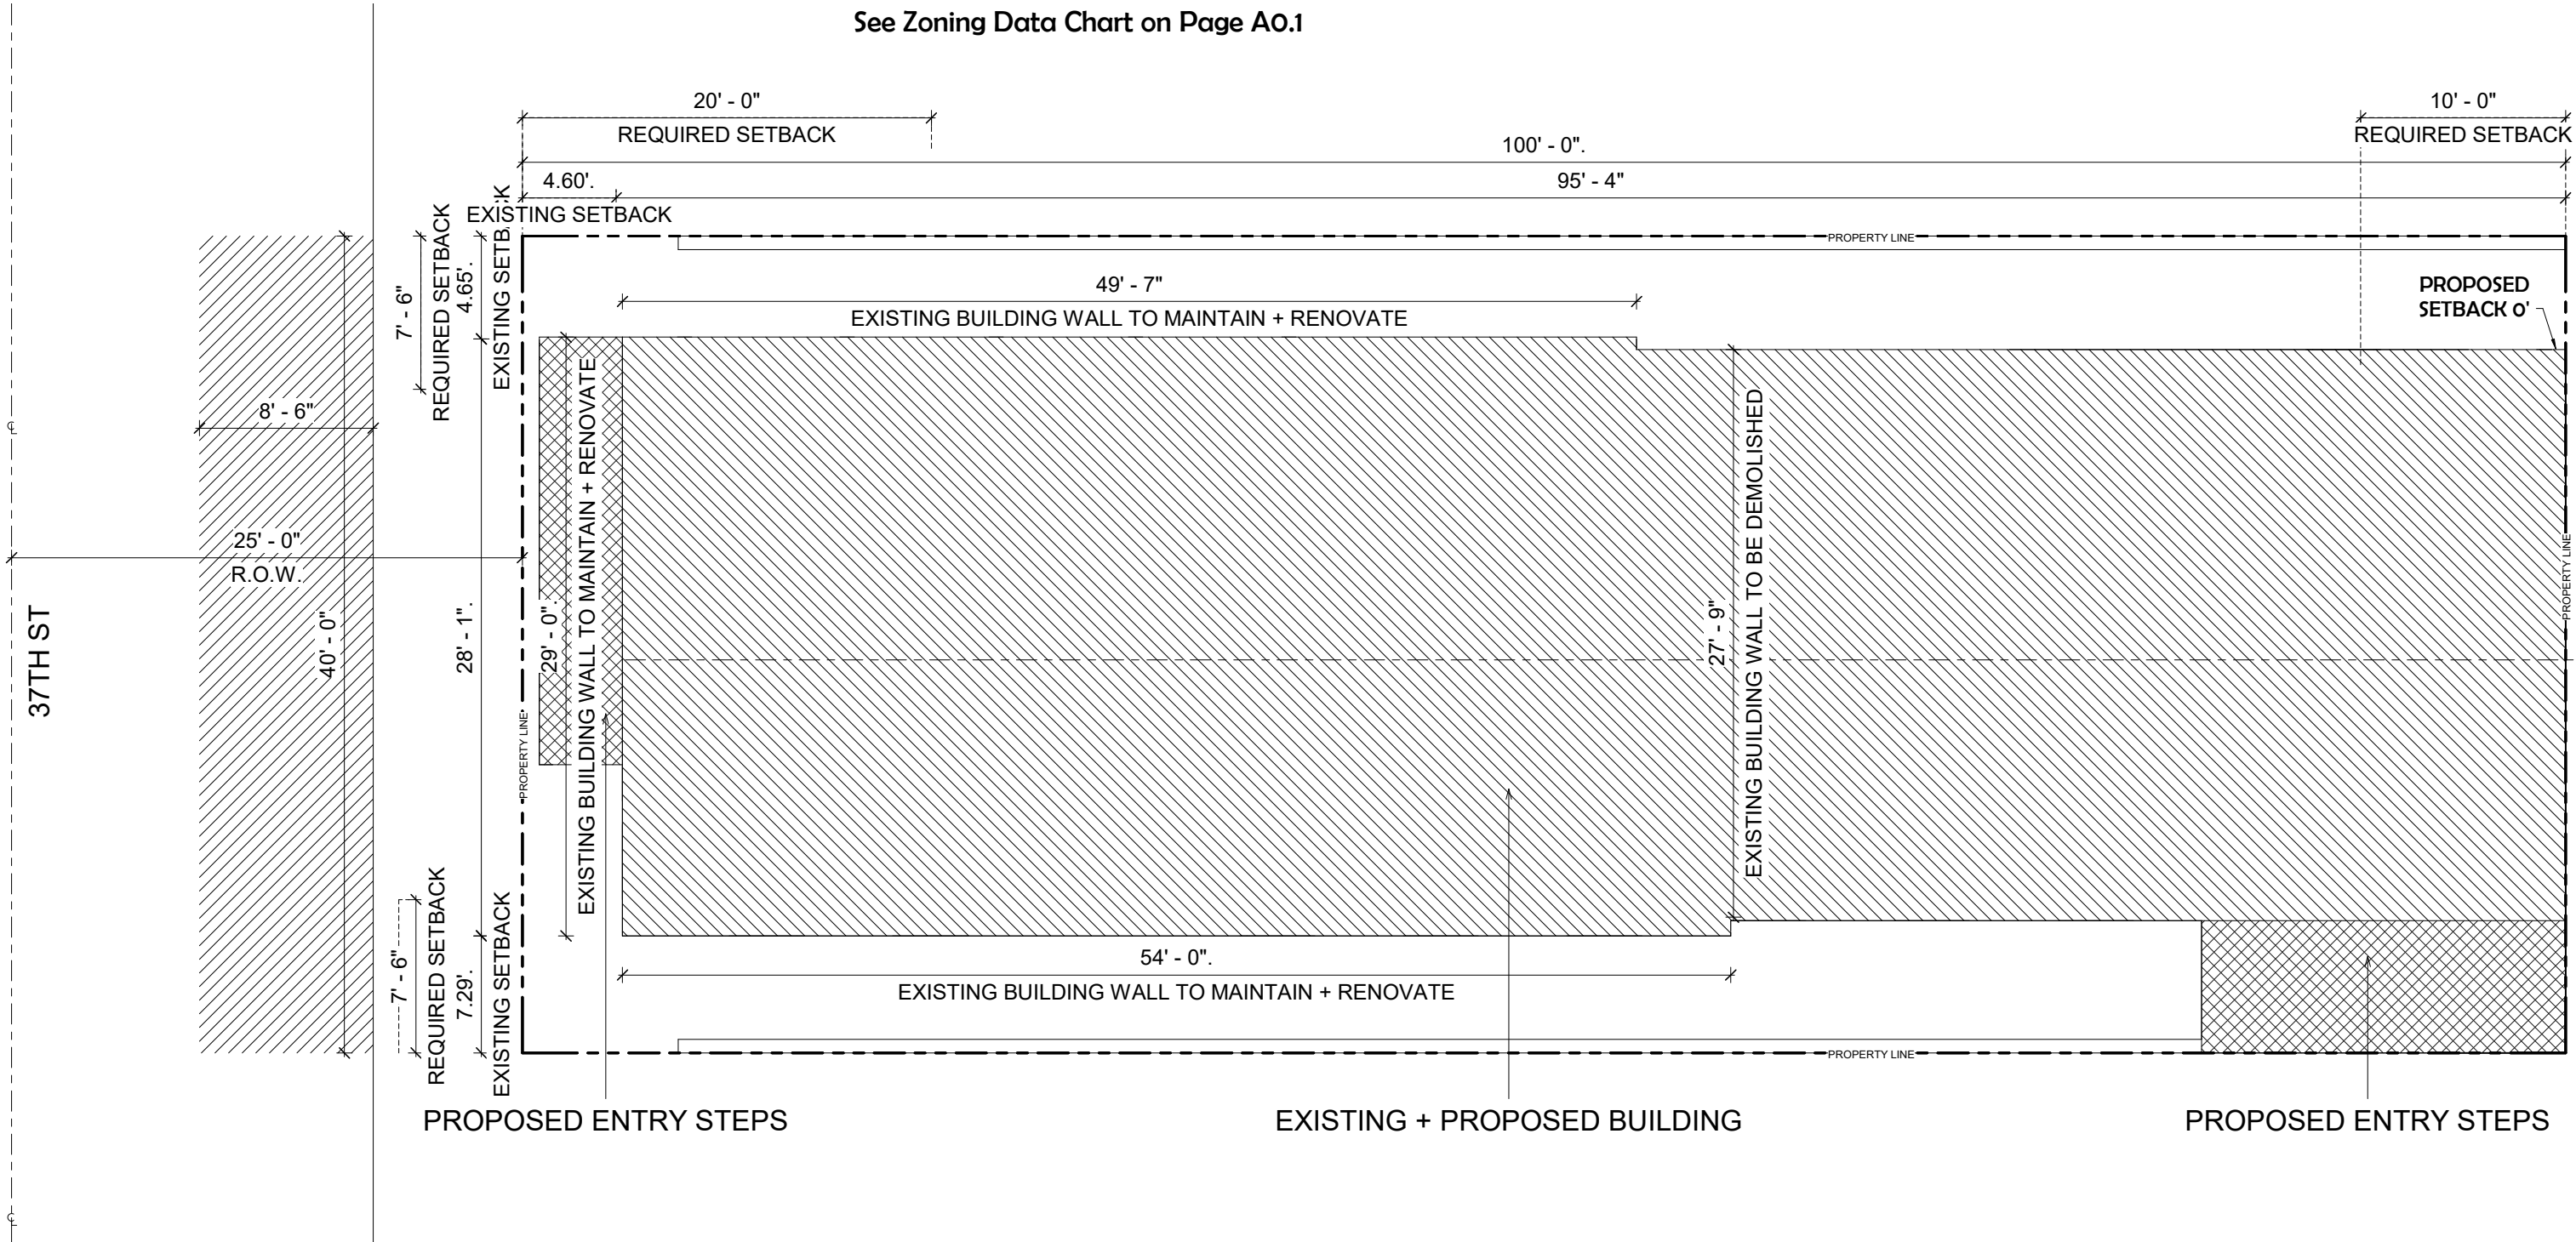


① SCHEMATIC VARIANCES PLAN
1/4" = 1'-0"

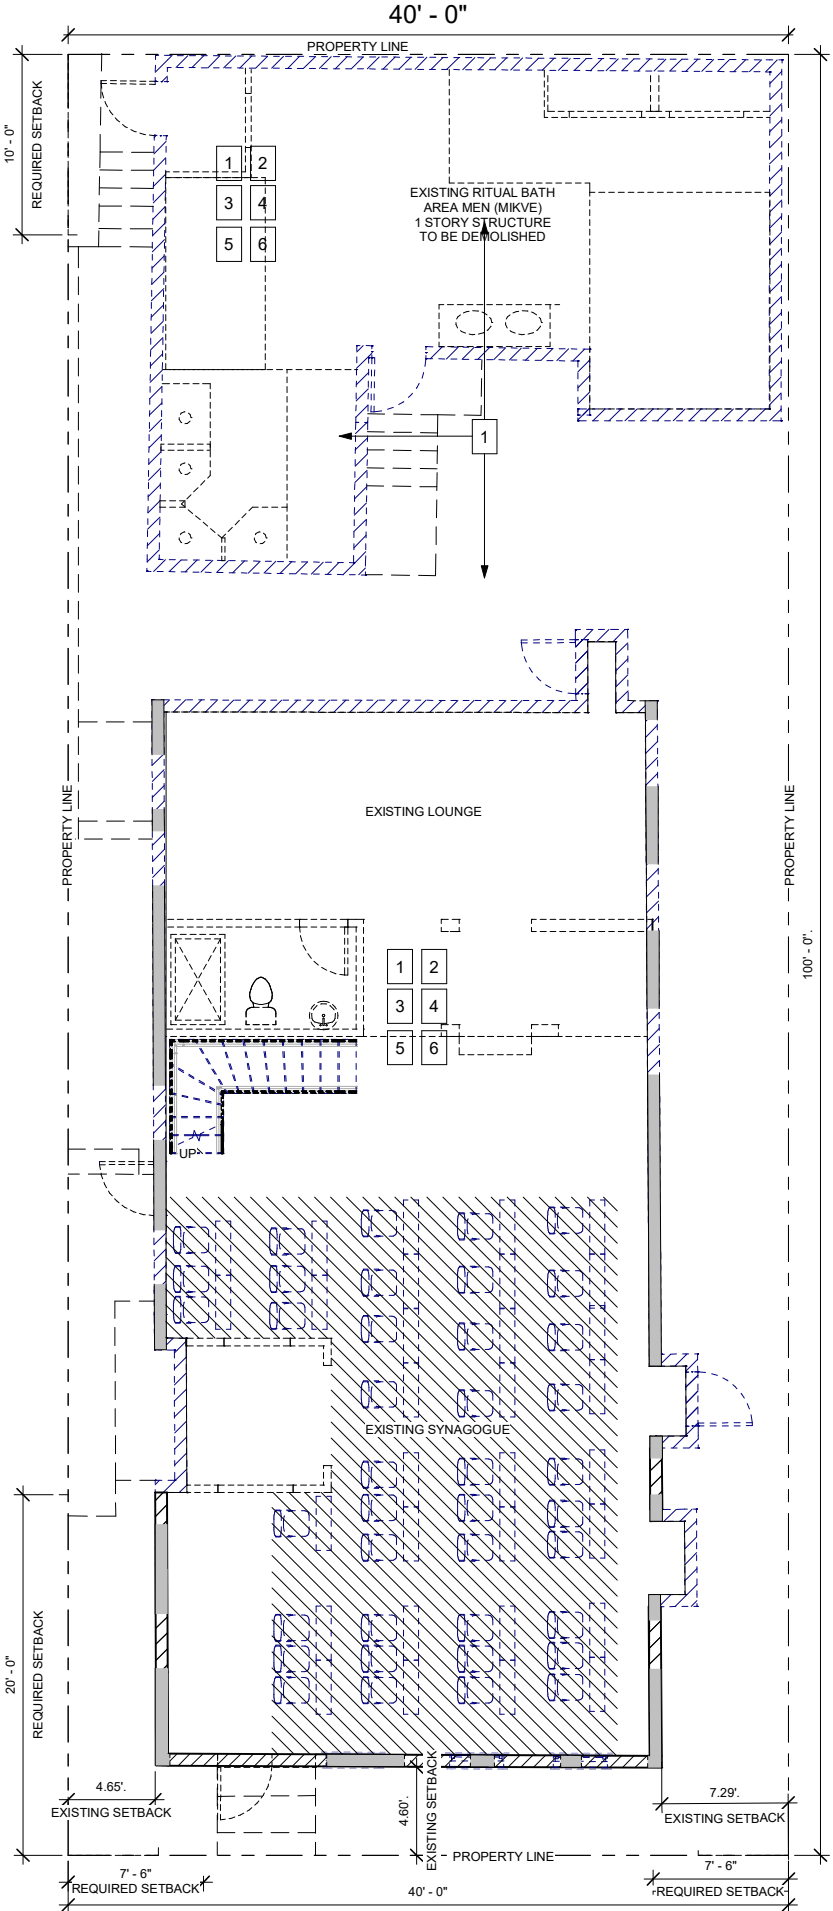

1 EXISTING DEMO GROUND FLOOR PLAN
3/32" = 1'-0"

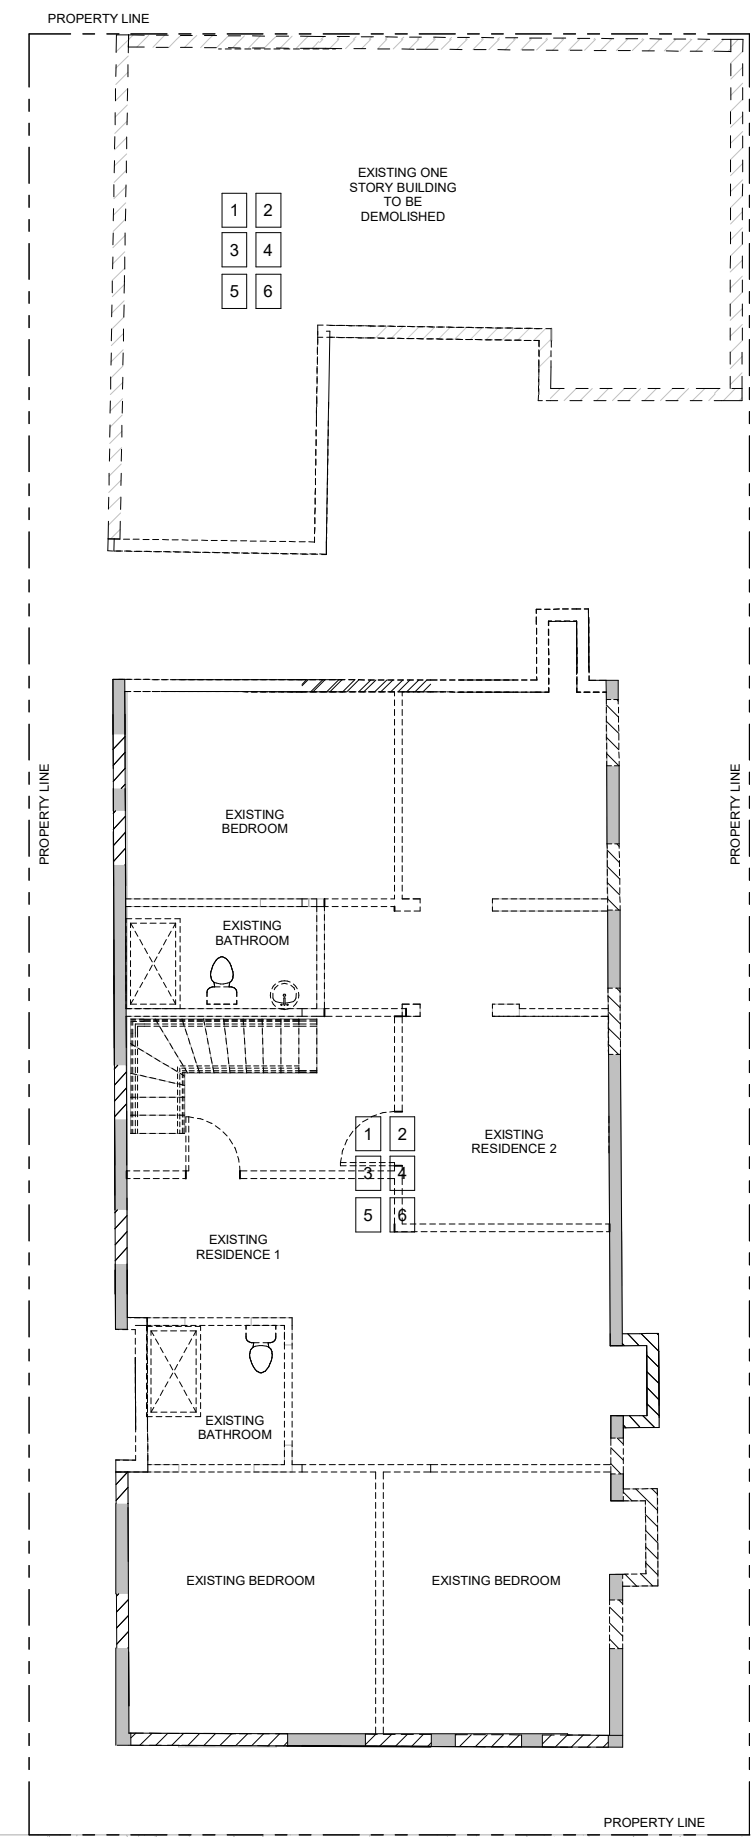

2 EXISTING DEMO 2nd FLOOR PLAN
3/32" = 1'-0"

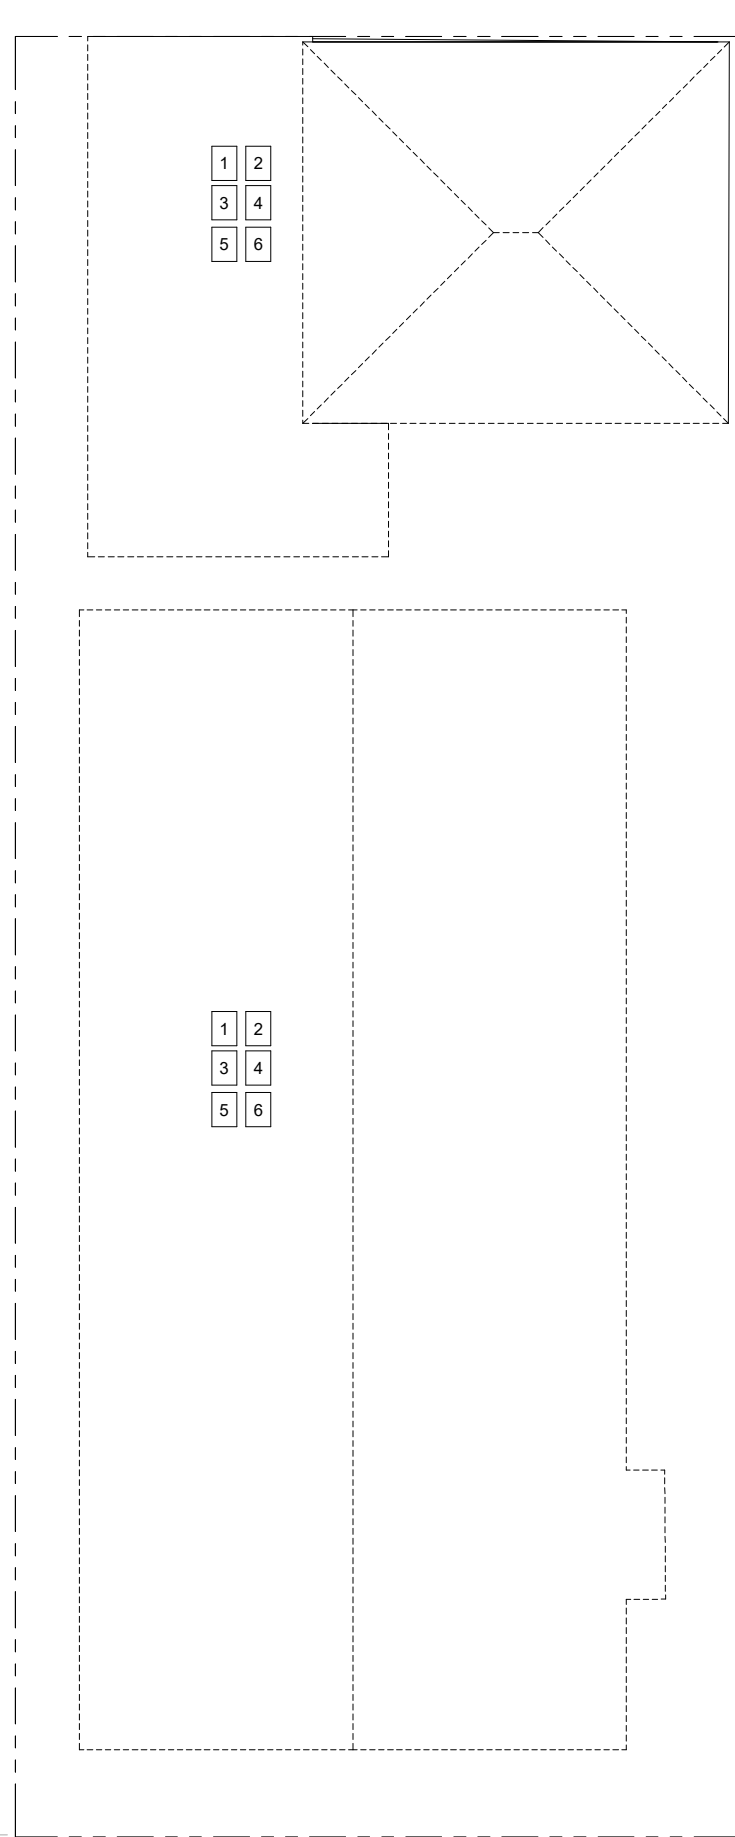


3 EXISTING ROOF
3/32" = 1'-0"


EXISTING OCCUPANCY LOAD CHART. FBC TABLE 1004.1.2 AND NFPA 101-TABLE 7.3.1.2					
LEVEL	DESCRIPTION	FUNCTION OF INTERIOR SPACE (ASSEMBLY WITHOUT FIXED SEATS)	OCCUPANT LOAD FACTOR	ALLOWED FLOOR AREA IN SQ. FT. PER OCCUPANT	EXISTING OCCUPANTS
GROUND FLOOR	RITUAL BATH	LOCKER	50 GROSS	100 SF / 50 = 2	2
		POOL	50 NET	108 SF / 50 = 3	3
	SYNAGOGUE	UNCONCENTRATED (TABLES AND CHAIRS)	15 NET	610 SF / 15 = 40.6 = 41	40
		LOUNGE	15 NET	342 SF / 15 = 22.8 = 23	23
SECOND FLOOR	RESIDENCE	RESIDENTIAL	200 GROSS	1560 SF / 200 = 7.8 = 8	8
TOTAL OCCUPANTS = 77					76

DEMOLITION KEY NOTES	
1	Remove structural members, provide temporary shoring where required and prepare areas for new work. (see structural details)
2	Remove all sanitary, vent & water piping & cap as required.
3	Remove electrical systems/panels, conduits & wiring.
4	Remove mechanical and a/c equipment, ducts, grills, etc.
5	Remove existing interior walls, stairs, steps, windows, ceilings, doors, roof and slabs
6	Notify arch. of all active MEP that can not be removed & capped.


DEMOLITION GENERAL NOTES	
1.	PROVIDE SELECTIVE DEMOLITION WORK AS INDICATED BY DRAWINGS, IN SCHEDULES, AND HEREIN SPECIFIED.
2.	IT IS THE INTENT OF THESE PLANS TO SHOW THE GENERAL EXTENTS OF THE DEMOLITION. THE CONTRACTOR SHALL BE RESPONSIBLE FOR COORDINATING ALL OF THE DEMOLITION WORK WITH THE INTENT OF THE PROPOSED DESIGN. ANY UNFORESEEN DEMOLITION NOT SHOWN IN THIS PLAN, AND WHICH IS REQUIRED TO MEET THE INTENT OF THE PROPOSED DESIGN, MUST BE INCLUDED IN THE CONTRACTOR SCOPE OF WORK
3.	PARTIAL DEMOLITION AND REMOVAL: ITEMS INDICATED TO BE REMOVED WITH NO VALUE TO OWNER BUT OF SALVAGEABLE VALUE TO CONTRACTOR MAY BE REMOVED FROM STRUCTURE AS WORK PROGRESSES. A) WHERE INDICATED ON DRAWINGS AS "SALVAGE - DELIVER TO OWNER", CAREFULLY REMOVE INDICATED ITEMS, CLEAN, STORE AND TURN OVER TO OWNER AND OBTAIN RECEIPT.
4.	PROTECTIONS: PROVIDE TEMPORARY BARRICADES AND OTHER FORMS OF PROTECTION AS REQUIRED TO PROTECT OWNER AND GENERAL PUBLIC FROM INJURY DUE TO SELECTIVE DEMOLITION WORK. A) PROVIDE PROTECTIVE MEASURES AS REQUIRED TO PROVIDE FREE AND SAFE PASSAGE OF OWNER AND GENERAL PUBLIC TO AND FROM OCCUPIED PORTIONS OF BUILDING. B) ERECT TEMPORARY COVERED PASSAGEWAYS AS REQUIRED BY AUTHORITIES HAVING JURISDICTION. C) PROVIDE INTERIOR AND EXTERIOR SHORING, BRACING, OR SUPPORT TO PREVENT MOVEMENT, SETTLEMENT OR COLLAPSE OF STRUCTURE OR ELEMENT TO BE DEMOLISHED, AND ADJACENT FACILITIES OR WORK TO REMAIN. D) REMOVE PROTECTIONS AT COMPLETION OF WORK.
5.	UTILITY SERVICES: MAINTAIN EXISTING UTILITIES INDICATED TO REMAIN, KEEP IN SERVICE, AND PROTECT AGAINST DAMAGE DURING DEMOLITION OPERATIONS. A) DO NOT INTERRUPT EXISTING UTILITIES SERVING OCCUPIED OR USED FACILITIES. PROVIDE TEMPORARY SERVICES DURING INTERRUPTIONS TO EXISTING UTILITIES. B) PROVIDE SERVICES FOR EFFECTIVE AIR AND WATER POLLUTION CONTROLS AS REQUIRED BY LOCAL AUTHORITIES HAVING JURISDICTION.
6.	CLEAN-UP AND REPAIR: A) UPON COMPLETION OF DEMOLITION WORK, REMOVE TOOLS, EQUIPMENT AND DEMOLISHED MATERIALS FROM SITE. REMOVE PROTECTIONS AND LEAVE INTERIOR AREAS BROOM CLEAN. B) REPAIR DEMOLITION PERFORMED IN EXCESS OF THAT REQUIRED. RETURN STRUCTURES AND SURFACES TO REMAIN TO CONDITION PRIOR TO COMMENCEMENT OF SELECTIVE DEMOLITION WORK. REPAIR ADJACENT CONSTRUCTION OF SURFACES SOILED OR DAMAGED BY SELECTIVE DEMOLITION WORK. C) DAMAGES: PROMPTLY REPAIR DAMAGES CAUSED TO ADJACENT FACILITIES BY DEMOLITION WORK AT NO COST TO OWNER. D) REMOVE DEBRIS, RUBBISH AND OTHER MATERIALS RESULTING FROM DEMOLITION OPERATIONS FROM BUILDING SITE. TRANSPORT AND LEGALLY DISPOSE OF MATERIALS OFF-SITE. E) PROTECT FROM DAMAGE EXISTING FINISH WORK THAT IS TO REMAIN IN PLACE AND BECOMES EXPOSED DURING DEMOLITION OPERATIONS. F) PROTECT FLOOR WITH SUITABLE COVERINGS WHEN NECESSARY. G) PROVIDE TEMPORARY WEATHER PROTECTION DURING INTERVAL PROTECTION BETWEEN DEMOLITION AND REMOVAL OF EXISTING CONSTRUCTION ON EXTERIOR SURFACES, AND INSTALLATION OF NEW CONSTRUCTION TO ENSURE THAT NO WATER LEAKAGE OR DAMAGE OCCURS TO STRUCTURE OR INTERIOR AREAS OF EXISTING BUILDING.
7.	EXPLOSIVES: THE USE OF EXPLOSIVES WILL NOT BE PERMITTED.
8.	ENVIRONMENTAL CONTROLS: IF HAZARDOUS MATERIALS ARE ENCOUNTERED DURING DEMOLITION OPERATIONS, COMPLY WITH APPLICABLE REGULATIONS, LAWS AND ORDINANCES CONCERNING REMOVAL, HANDLING AND PROTECTION AGAINST EXPOSURE OR ENVIRONMENTAL POLLUTION.
9.	BEGINNING OF DEMOLITION/ INSTALLATION WILL BE CONSTRUED AS ACCEPTANCE OF EXISTING SUBSTRATES, SURFACES, AND CONDITIONS.
10.	ELECTRICAL: ALL UNUSED WIRES AND CONDUITS TO BE REMOVED

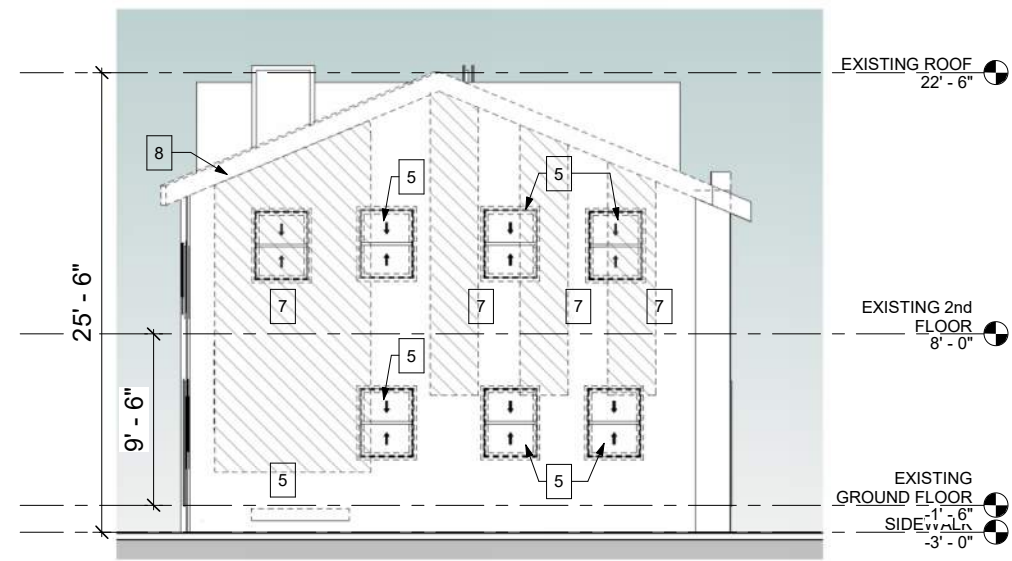


① EXISTING FRONT ELEVATION
3/16" = 1'-0"

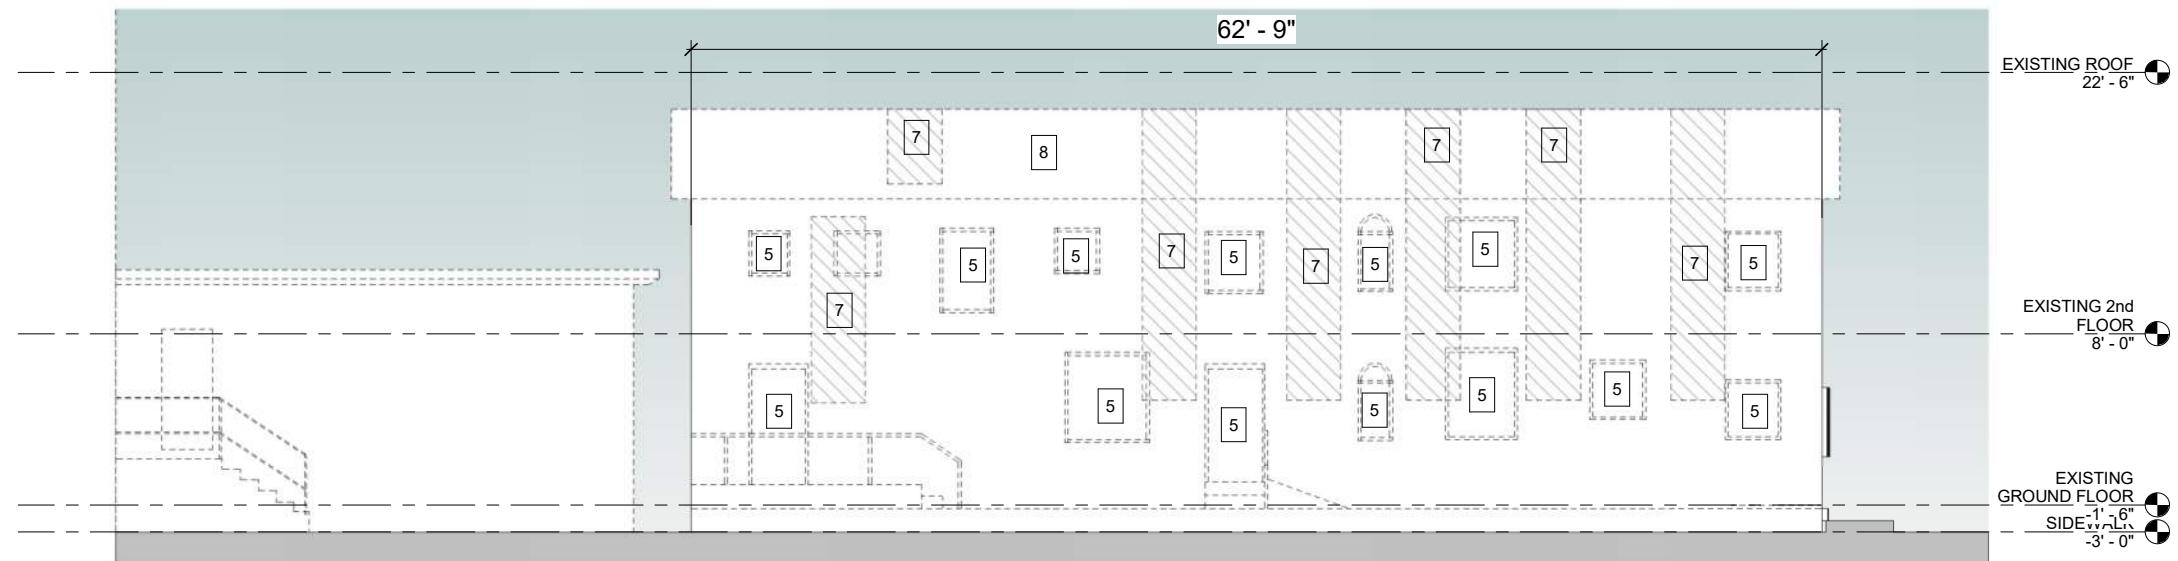

② EXISTING WEST ELEVATION
3/16" = 1'-0"

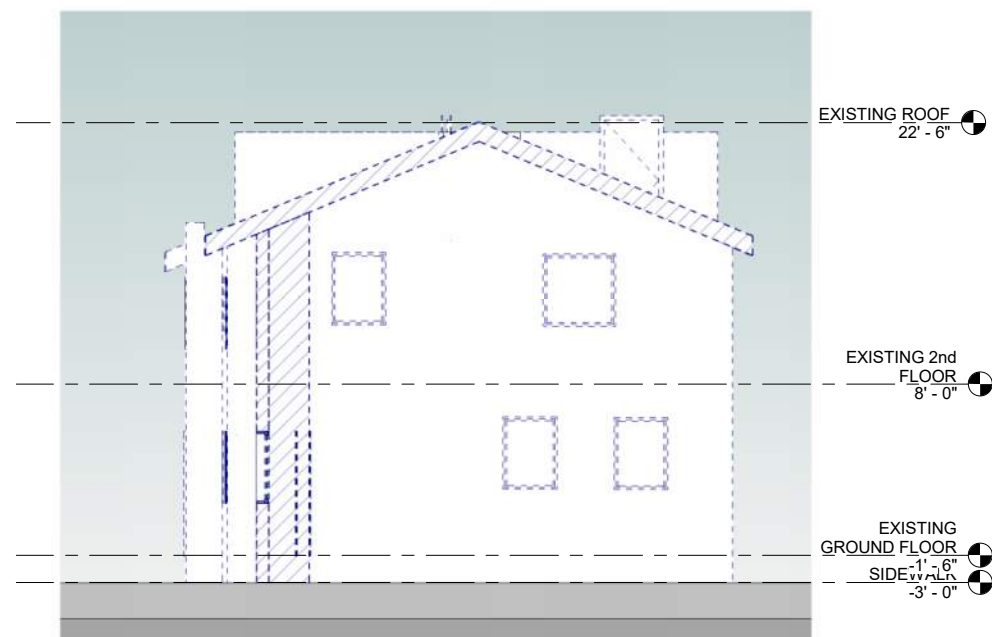


③ EXISTING NORTH ELEVATION
3/16" = 1'-0"

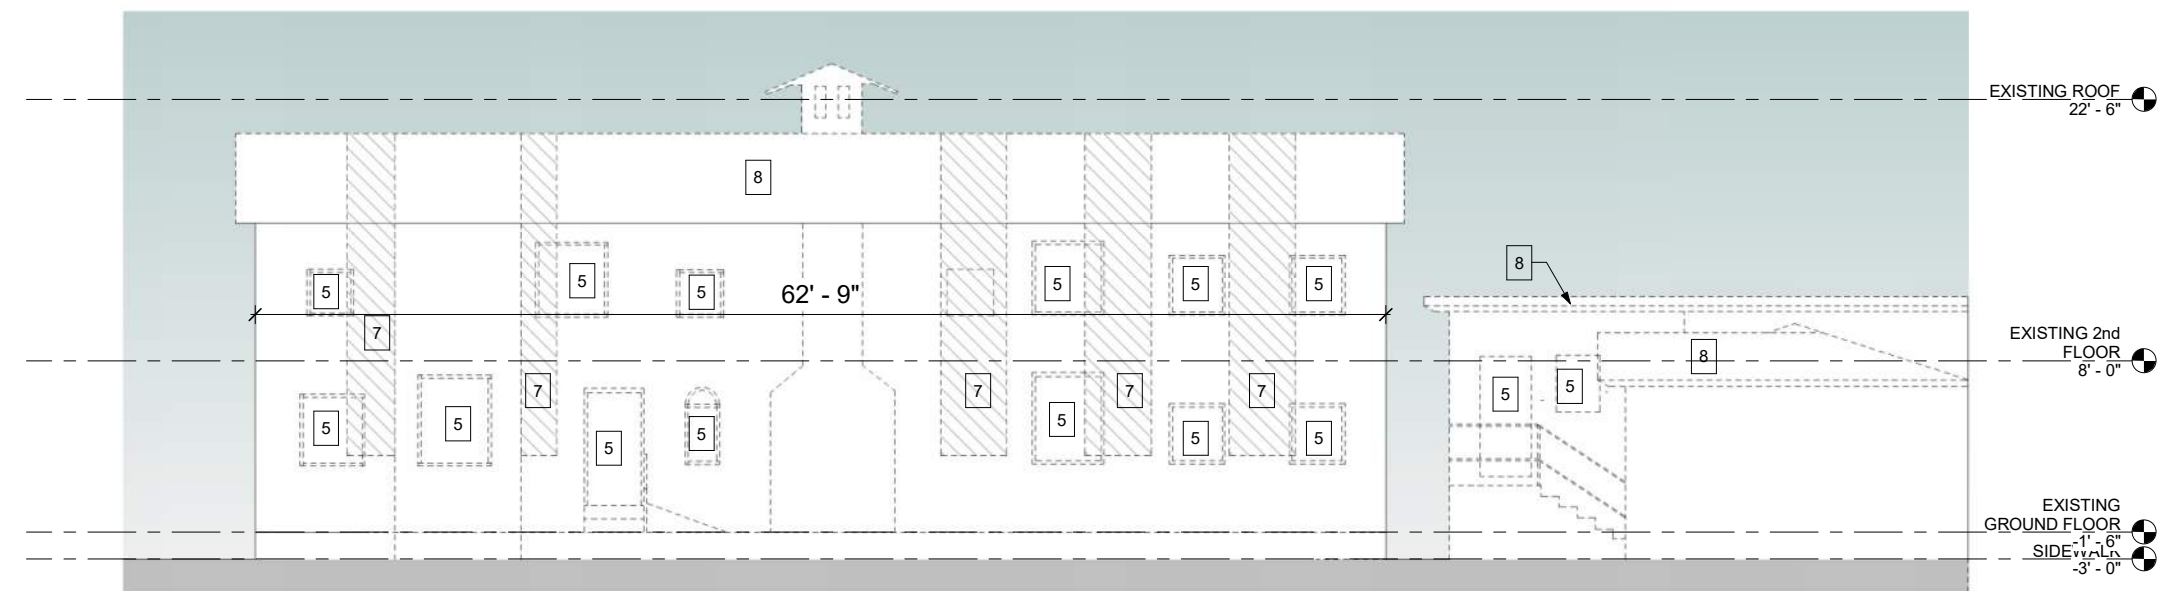


④ EXISTING EAST ELEVATION
3/16" = 1'-0"

DEMOLITION KEY NOTES

- 1 Remove structural members, provide temporary shoring where required and prepare areas for new work. (see structural details)
- 2 Remove all sanitary, vent & water piping & cap as required.
- 3 Remove electrical systems/panels, conduits & wiring.
- 4 Remove mechanical and a/c equipment, ducts, grills, etc.
- 5 Remove existing interior walls, stairs, steps, windows, ceilings, doors, roof and slabs
- 6 Notify arch. of all active MEP that can not be removed & capped.
- 7 Openings for future proposed windows.

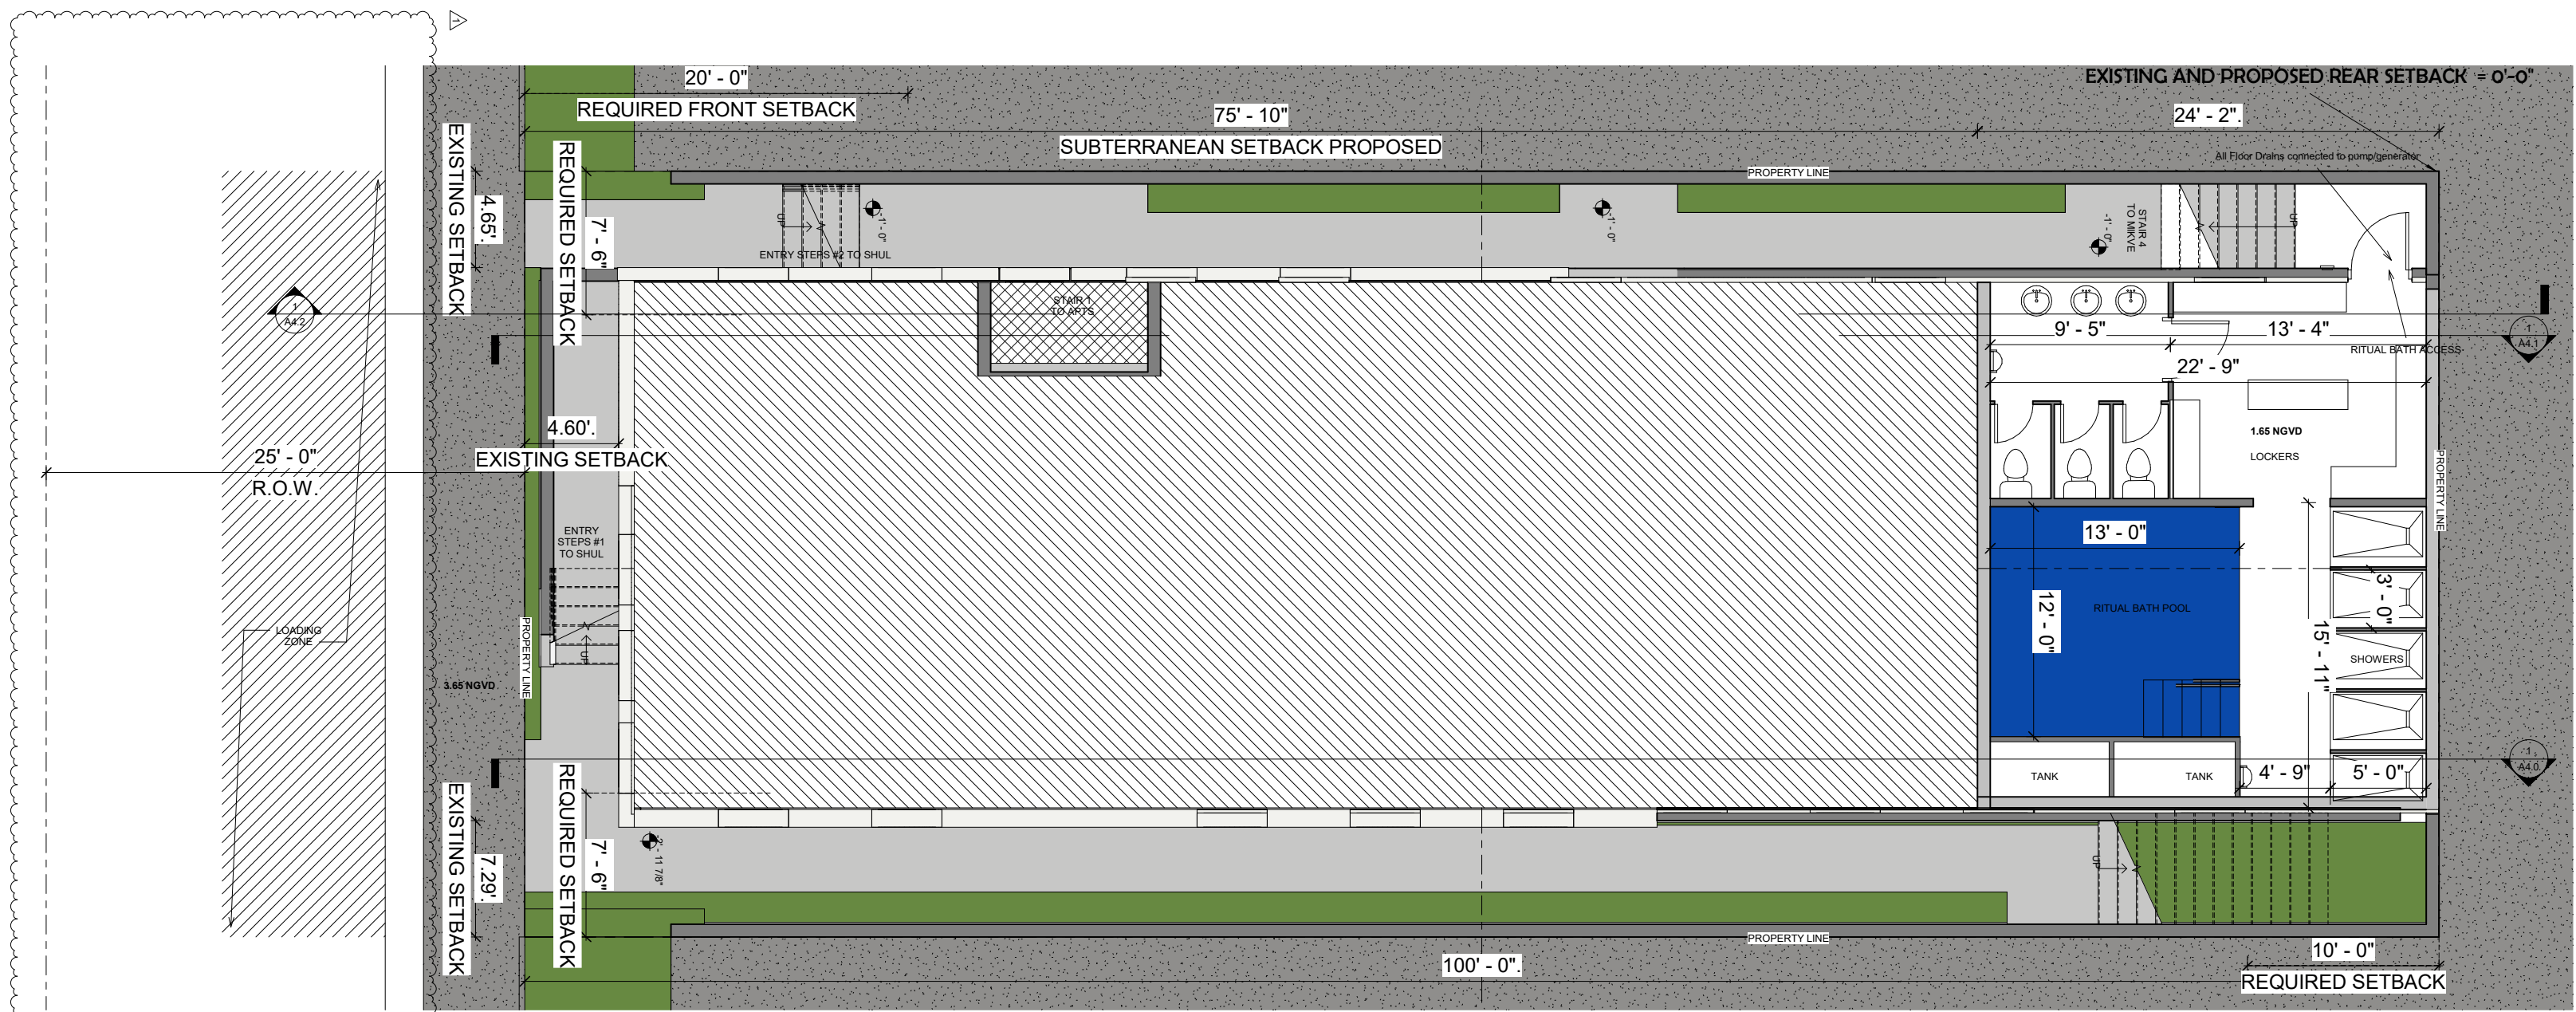


① RITUAL BATH BASEMENT
1/8" = 1'-0"

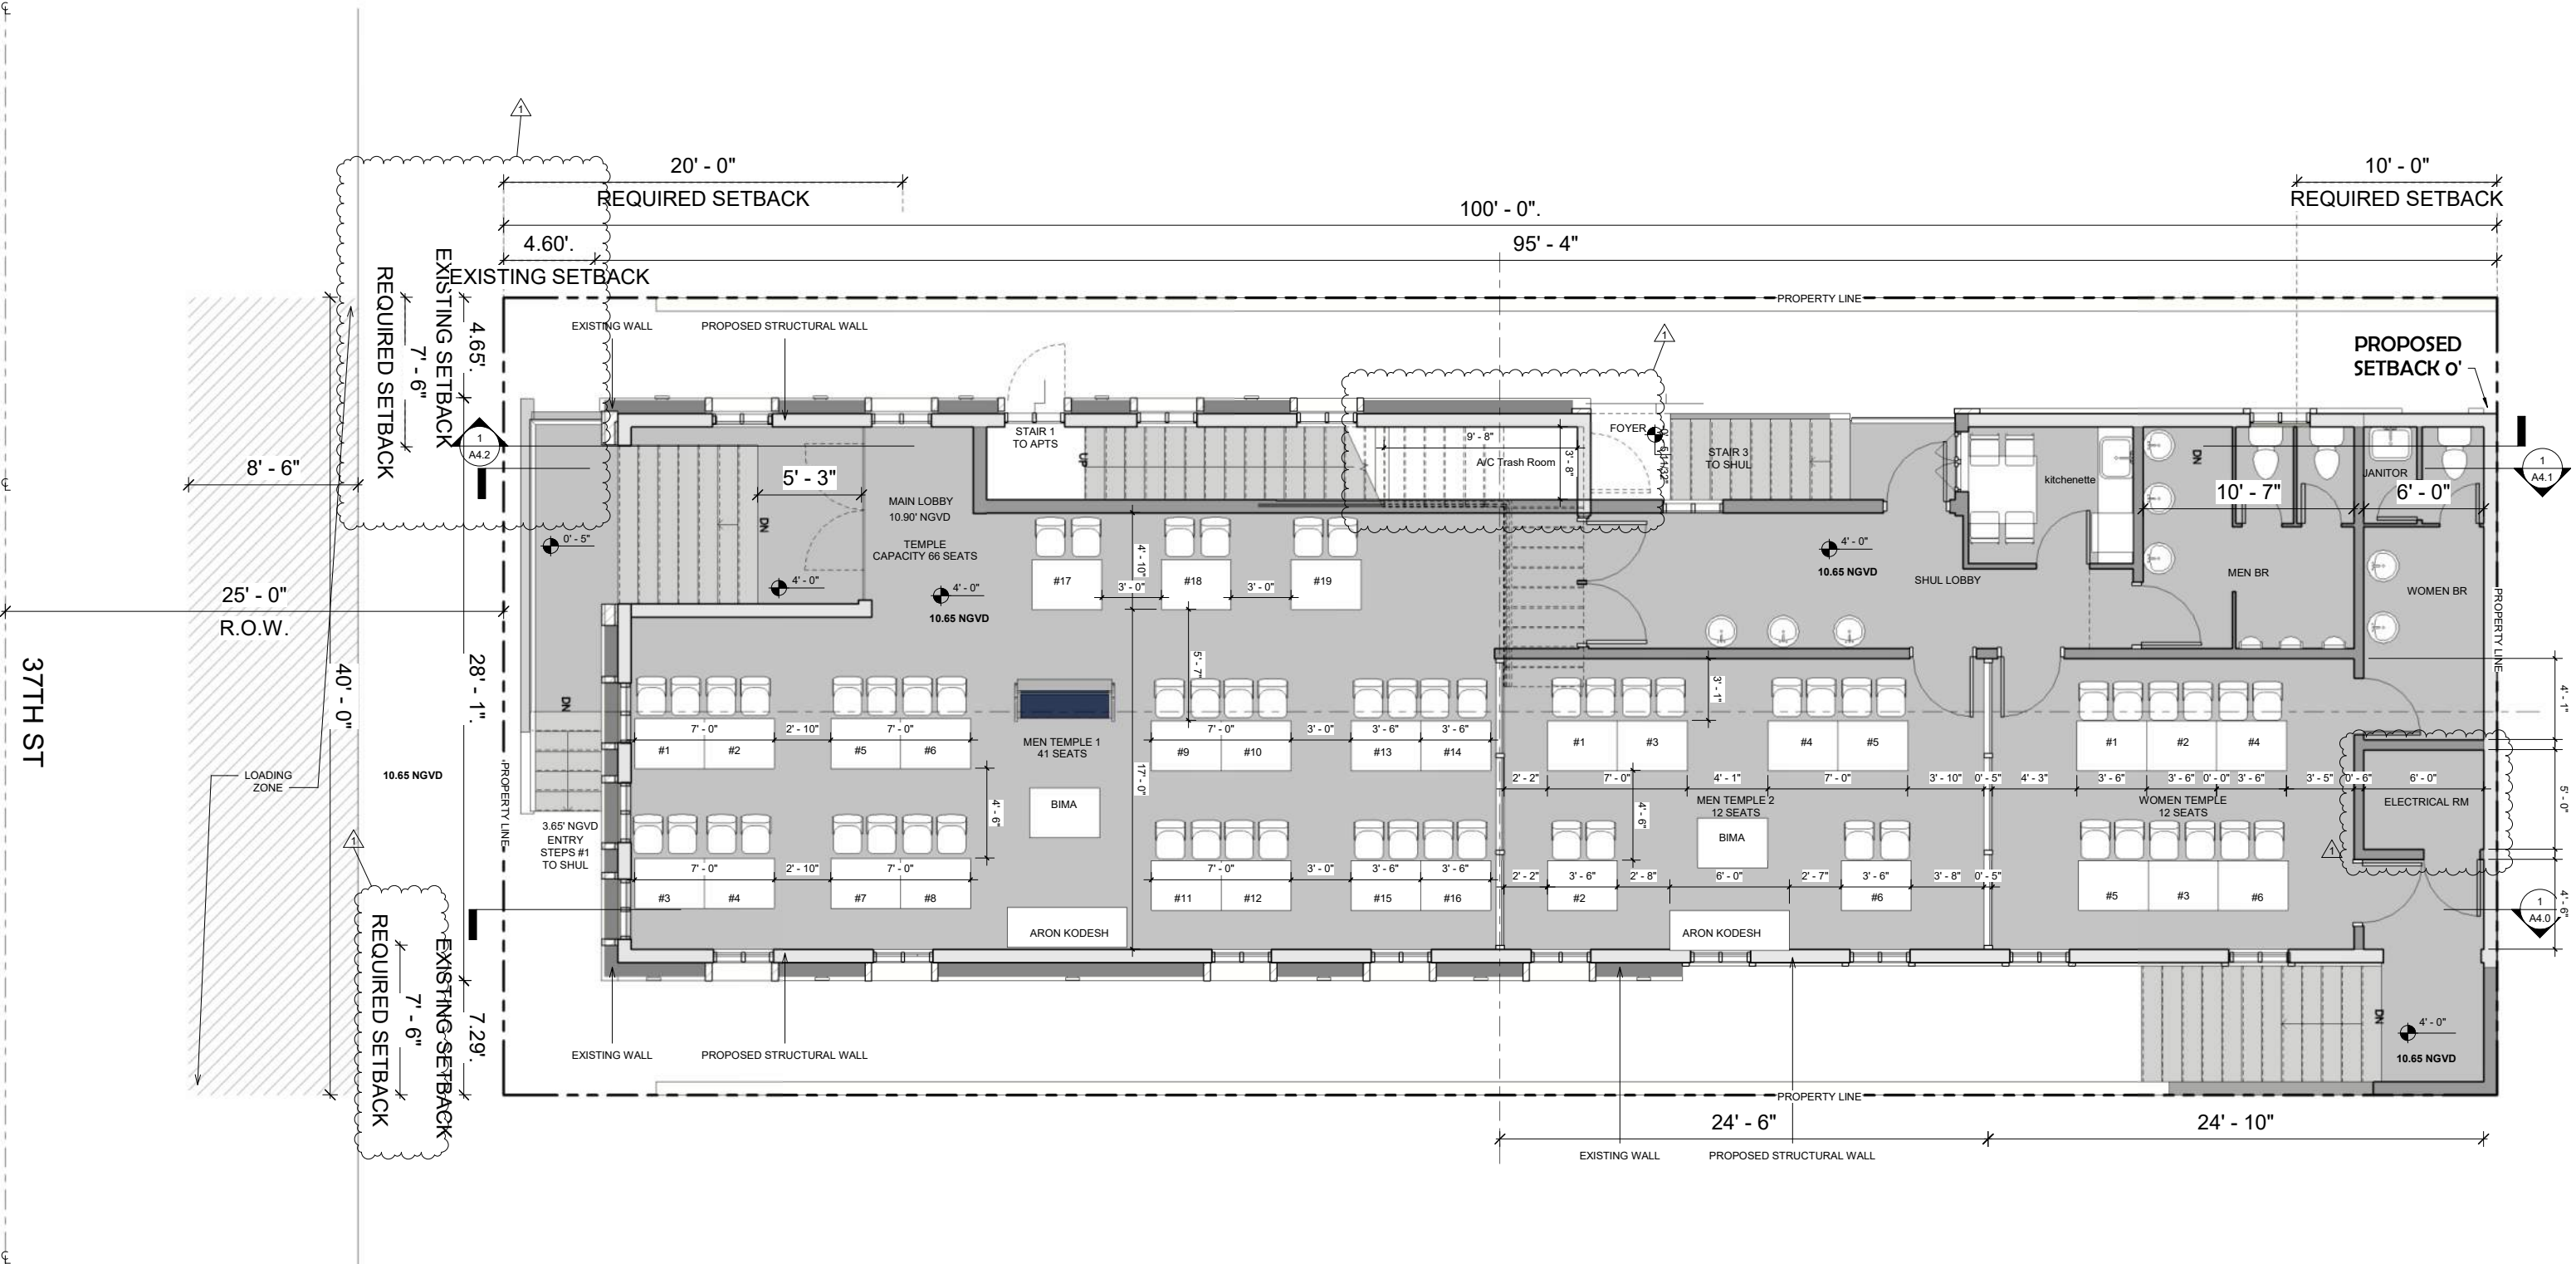

1 TEMPLE GROUND LEVEL
1/8" = 1'-0"

EXISTING OCCUPANCY LOAD CHART. FBC TABLE 1004.1.2 AND NFPA 101-TABLE 7.3.1.2					
	DESCRIPTION	FUNCTION OF INTERIOR SPACE (ASSEMBLY WITHOUT FIXED SEATS)	OCCUPANT LOAD FACTOR	ALLOWED FLOOR AREA IN SQ. FT. PER OCCUPANT	EXISTING OCCUPANTS
	RITUAL BATH	LOCKER	50 GROSS	100 SF / 50 = 2	2
		POOL	50 NET	108 SF / 50 = 3	3
	SYNAGOGUE	UNCONCENTRATED (TABLES AND CHAIRS)	15 NET	610 SF / 15 = 40.6 = 41	40
		LOUNGE	15 NET	342 SF / 15 = 22.8 = 23	23
SECOND FLOOR	RESIDENCE	RESIDENTIAL	200 GROSS	1560 SF / 200 = 7.8 = 8	8
TOTAL OCCUPANTS = 77					76

PROPOSED OCCUPANCY LOAD CHART. FBC TABLE 1004.1.2 AND NFPA 101-TABLE 7.3.1.2					
LEVEL	DESCRIPTION	FUNCTION OF INTERIOR SPACE (ASSEMBLY WITHOUT FIXED SEATS)	OCCUPANT LOAD FACTOR (PER SQUARE FOOT)	ALLOWED FLOOR AREA IN SQ. FT. PER OCCUPANT	PROPOSED OCCUPANTS
BASEMENT	RITUAL BATH	LOCKER ROOM	50 GROSS	150 SF / 50 = 3	3
		WATER SURFACE	50 NET	200 SF / 50 = 4	4
GROUND FLOOR	SYNAGOGUE	BENCH TYPE SEATING	1 persoh / 18 linear in.	1188 in. / 18 = 66	65
SECOND FLOOR	RESIDENCE	RESIDENTIAL	200 GROSS	1810 SF / 200 = 10	10
THIRD FLOOR	RESIDENCE	RESIDENTIAL	200 GROSS	1445 SF / 200 = 8	8
TOTAL OCCUPANTS = 91					90

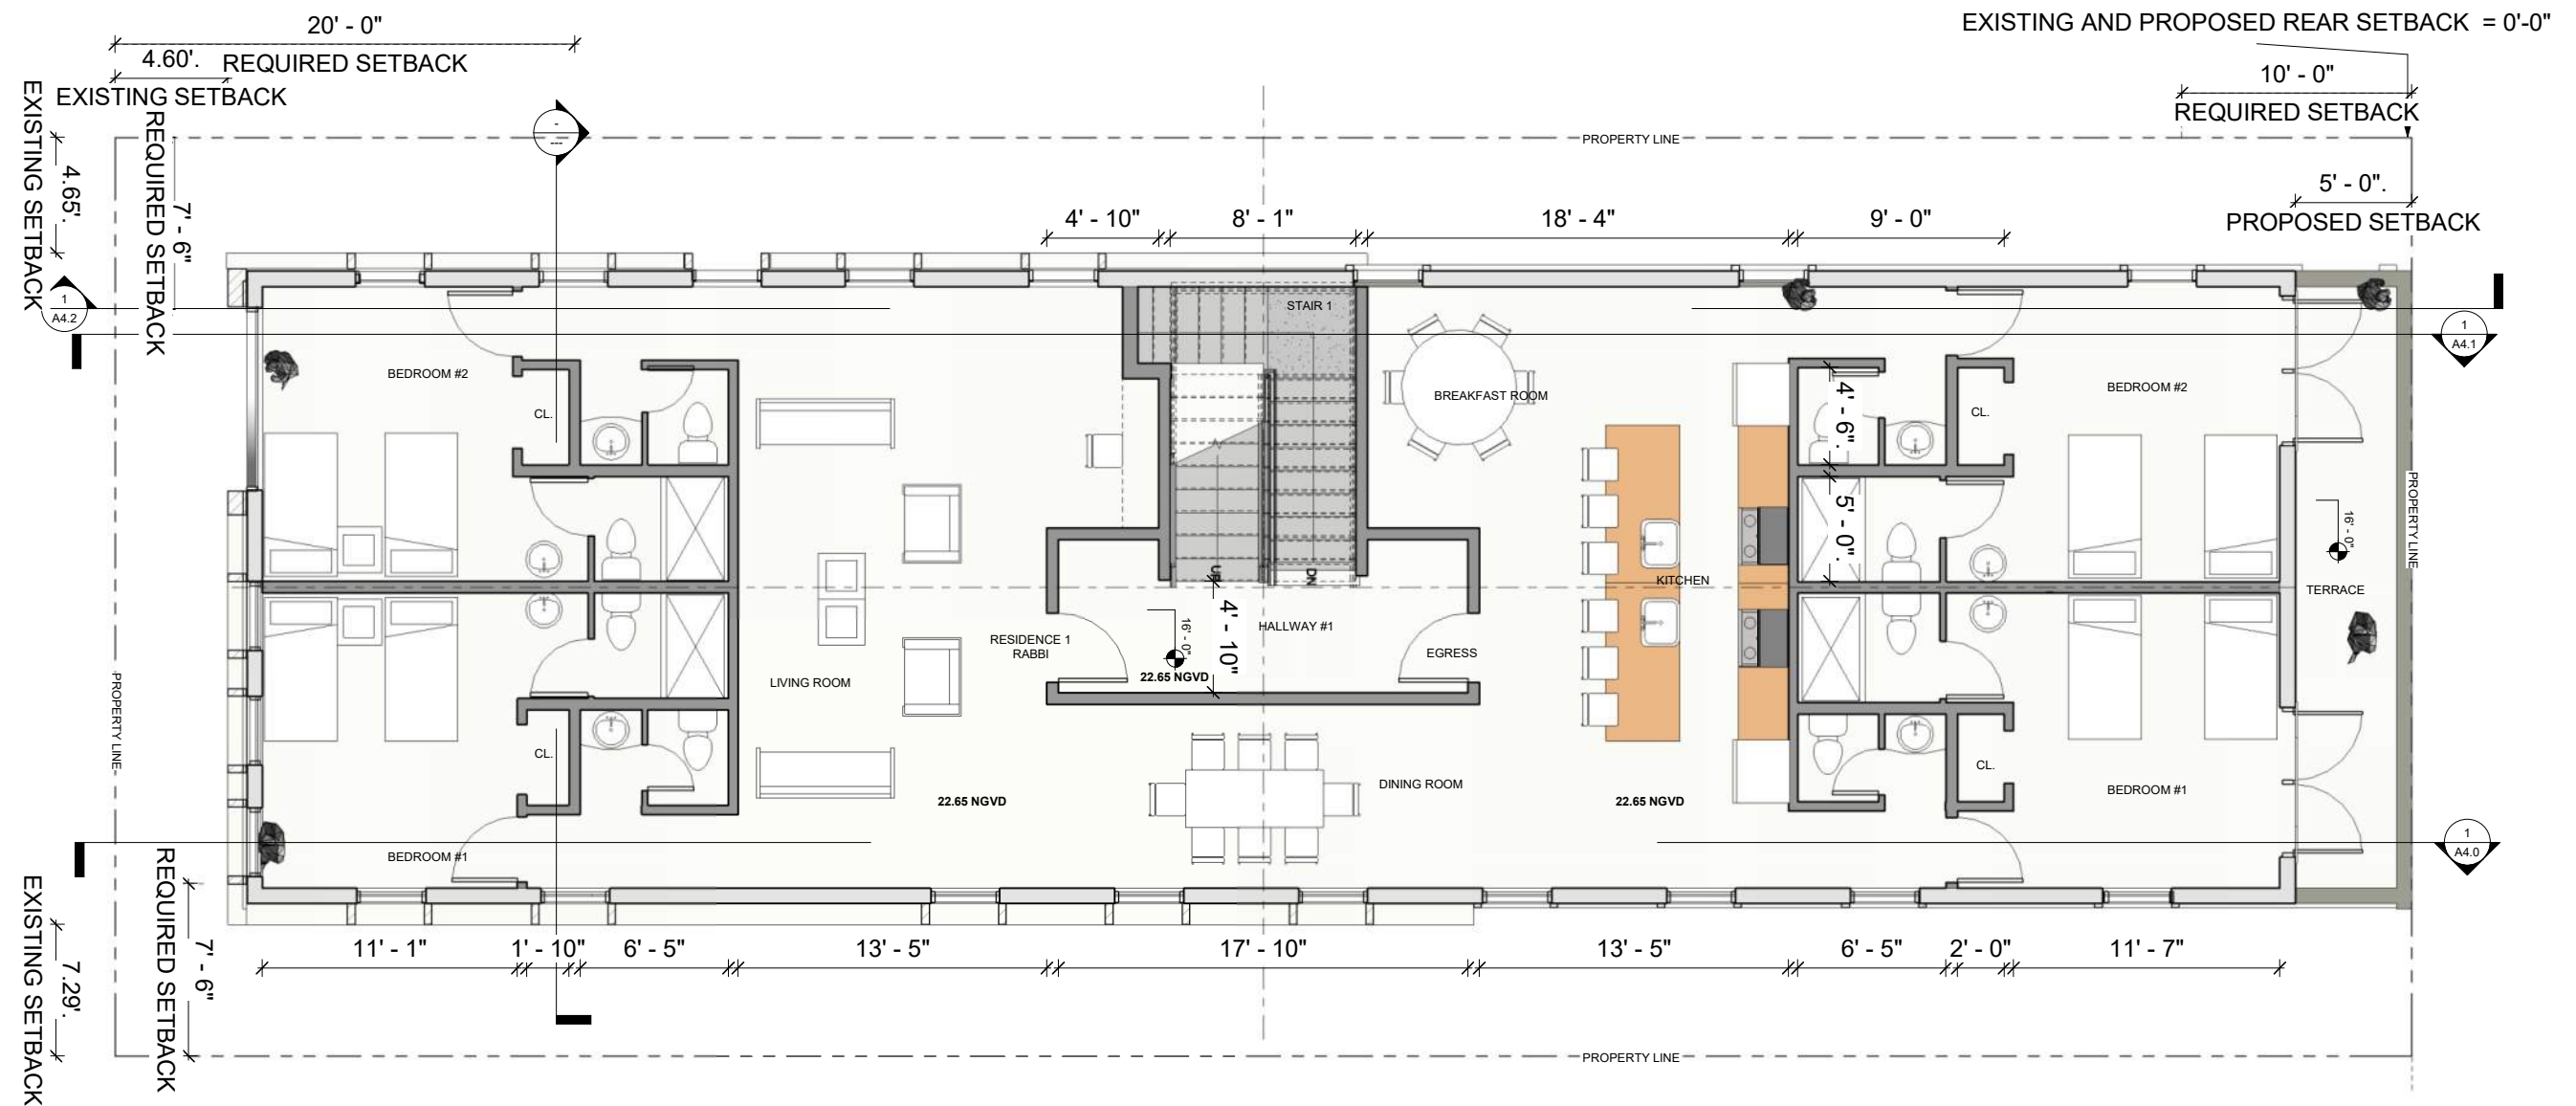

① APARTMENT #1 LEVEL 2
1/8" = 1'-0"

ADAS DEJ SYNAGOGUE
225 37TH ST. MIAMI BEACH FL. 33139


FIRST SUBMITTAL
NOV. 30th 2021


1 CITY COMMENTS 11/29/2021

PROPOSED APARTMENT #1
LEVEL 2

Project #21-009


A2.2



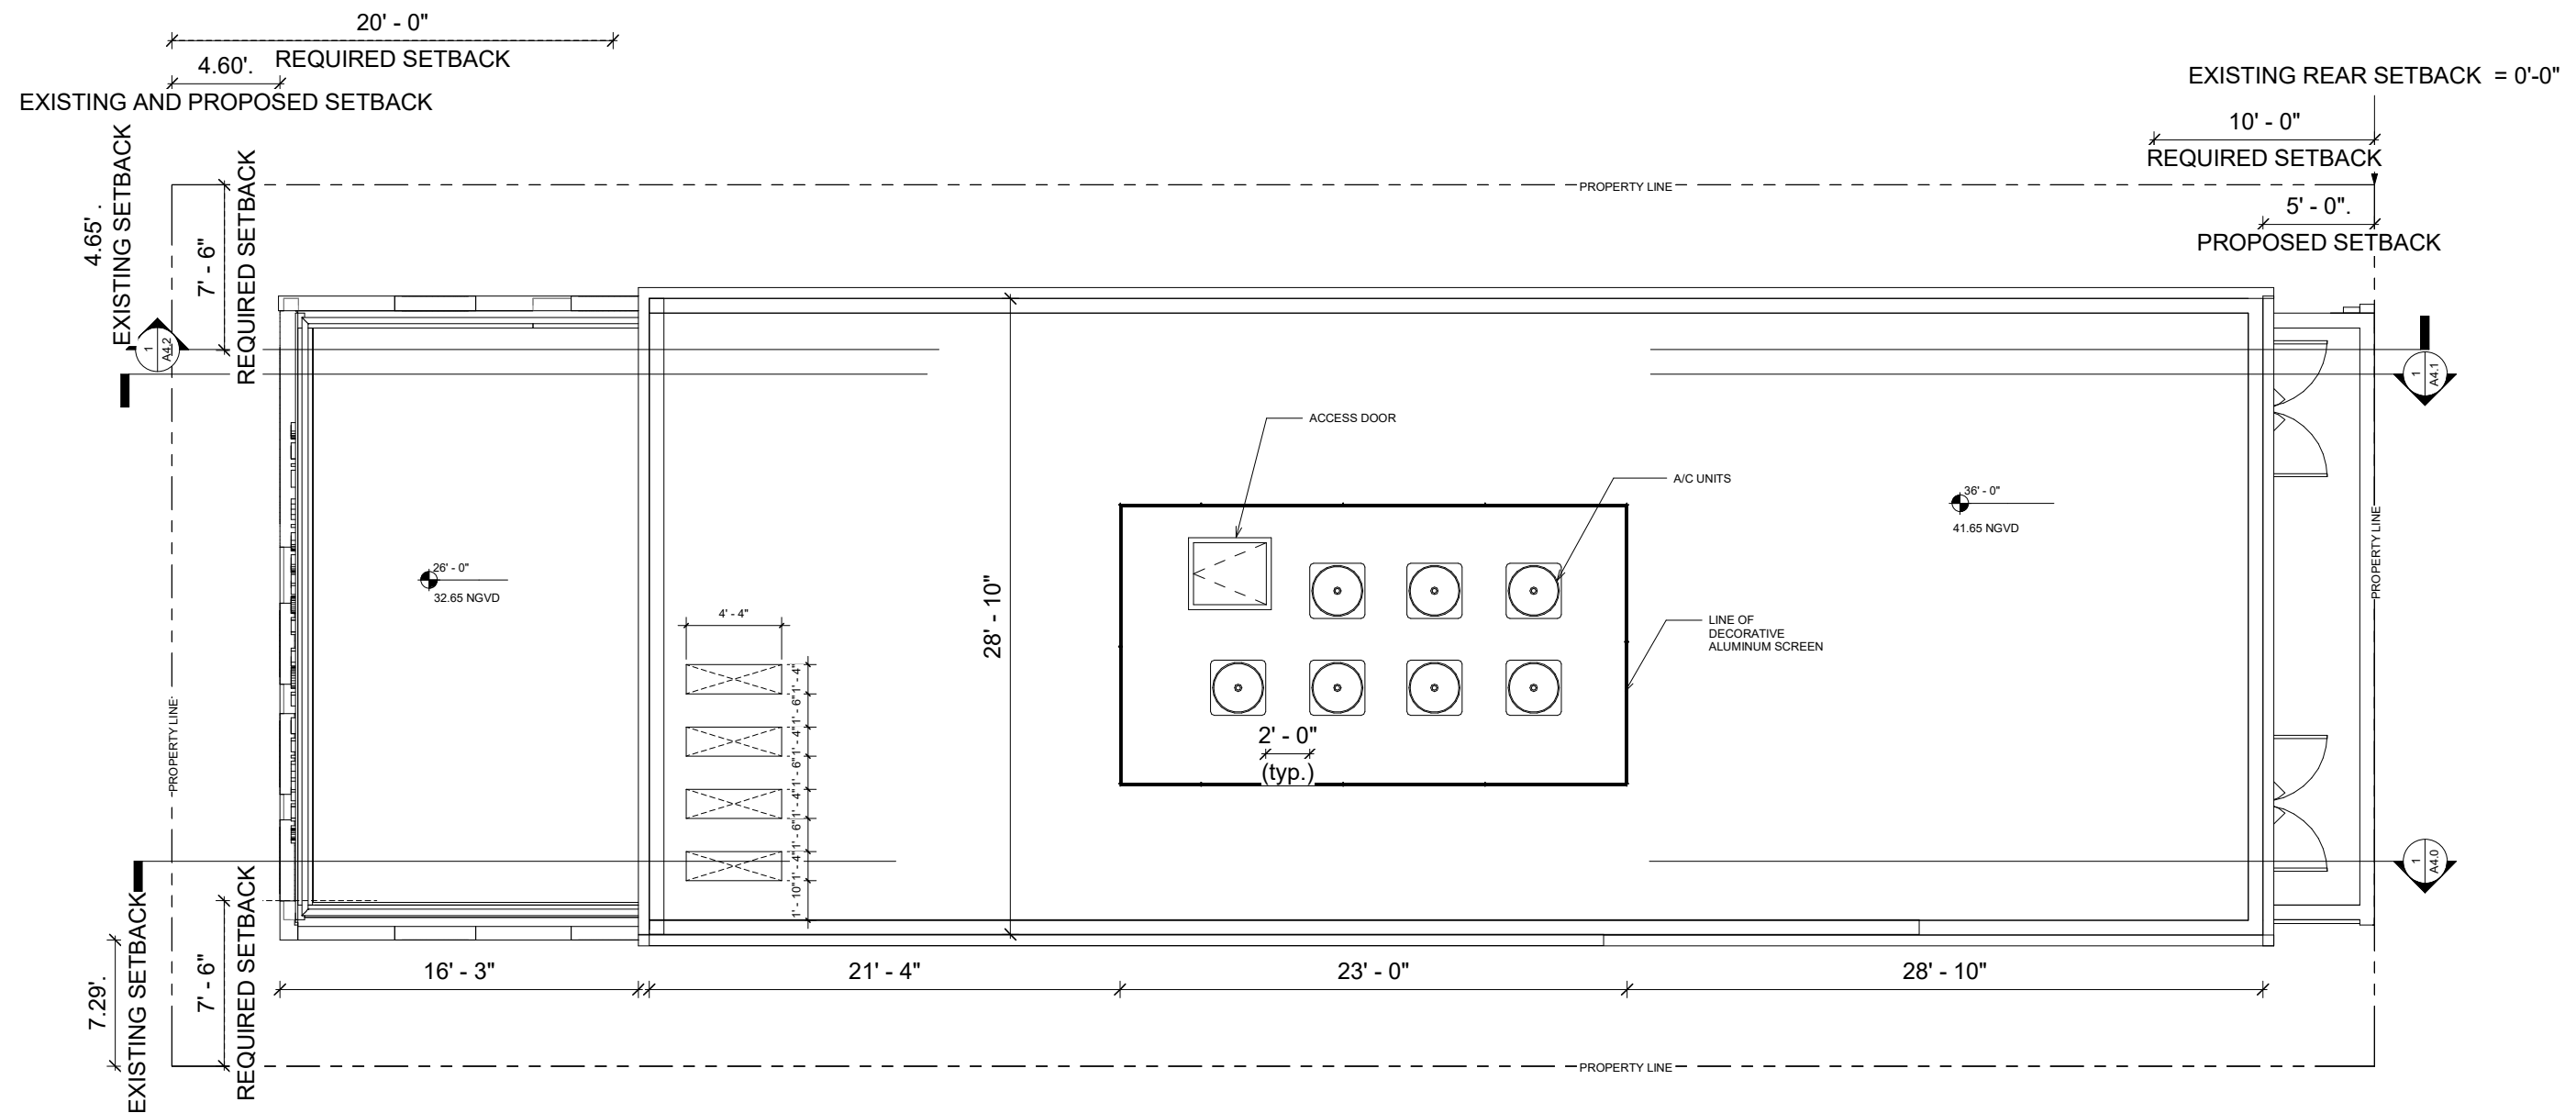




② North
1/8" = 1'-0"

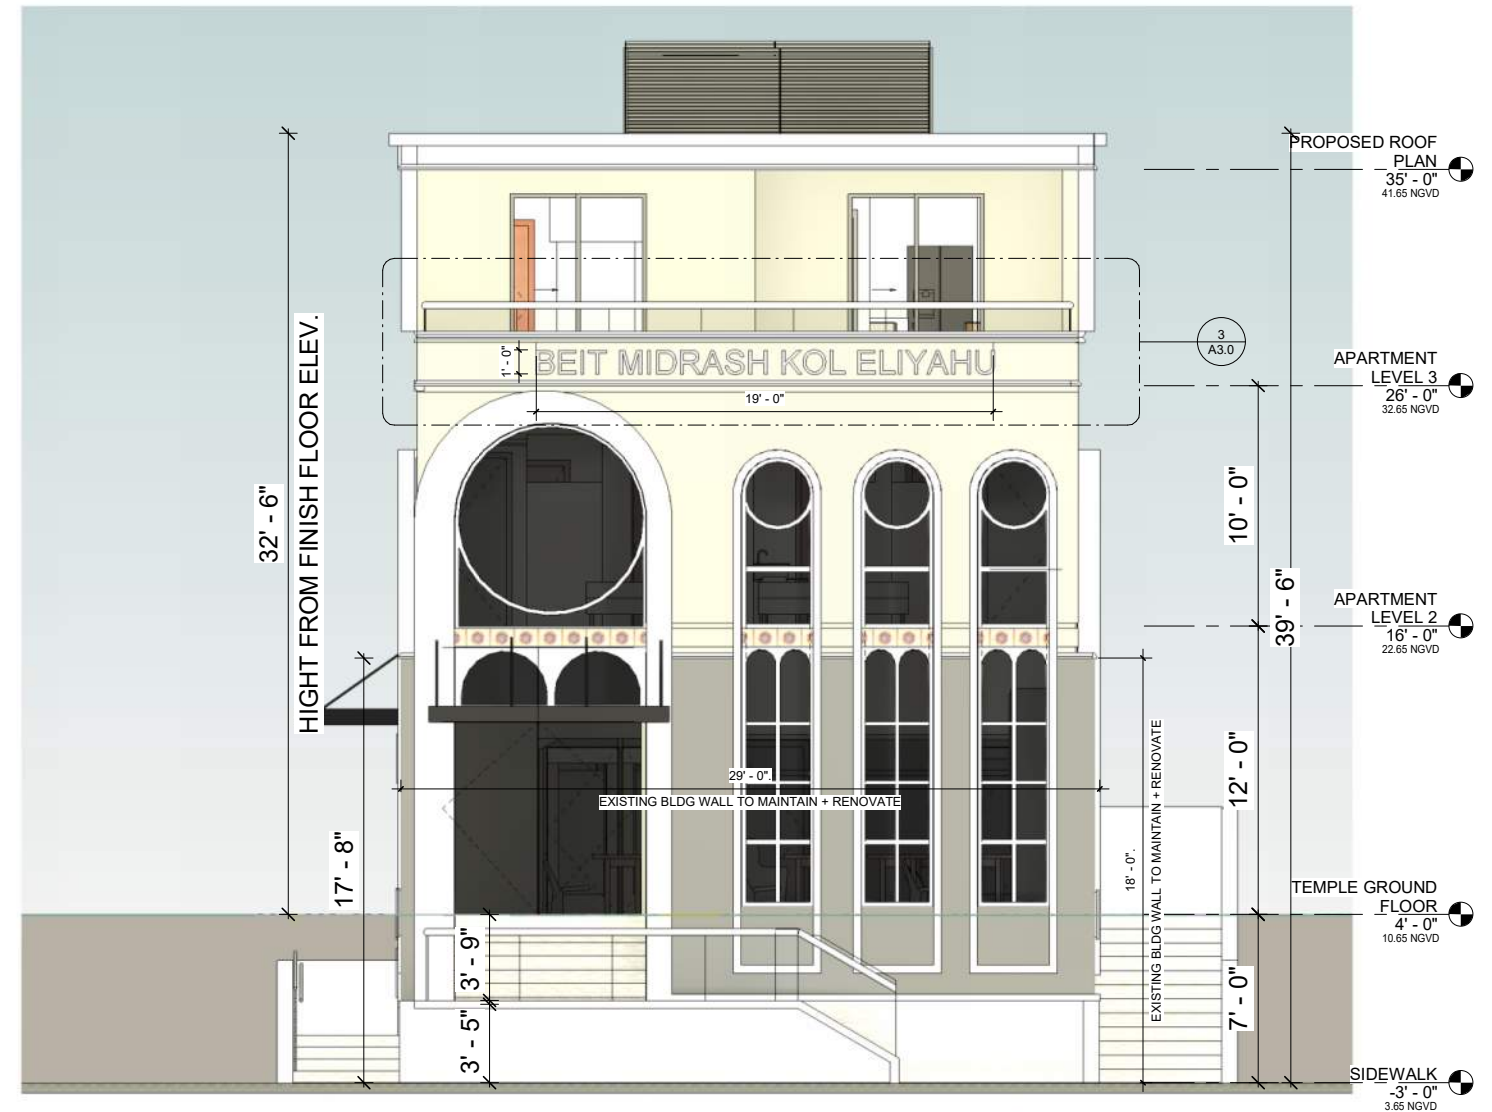


① South
1/8" = 1'-0"

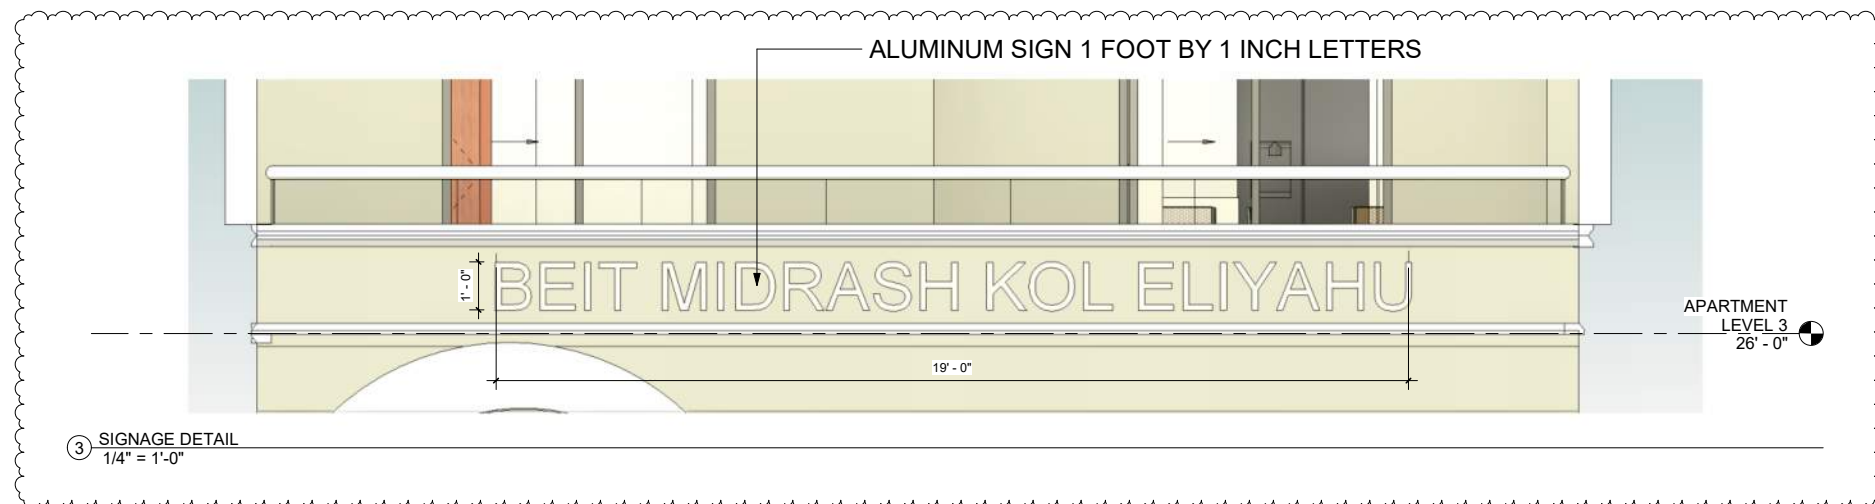



① East
1/8" = 1'-0"

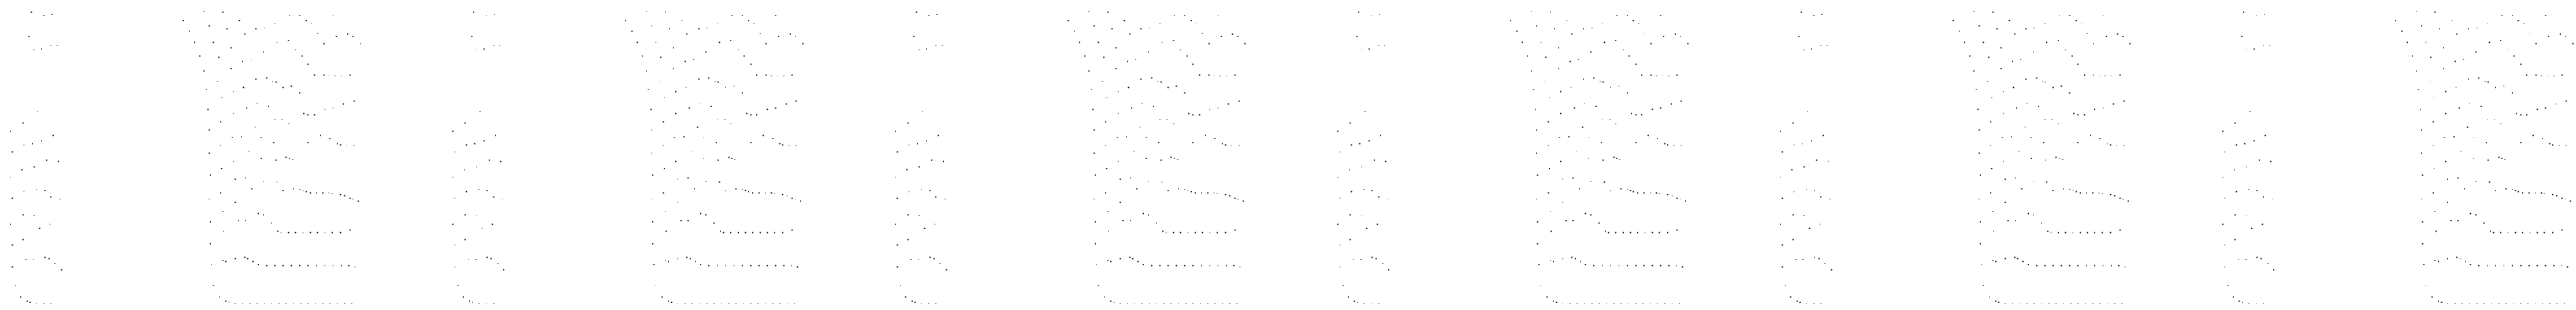





① West
1/8" = 1'-0"



① Section 1
1/8" = 1'-0"

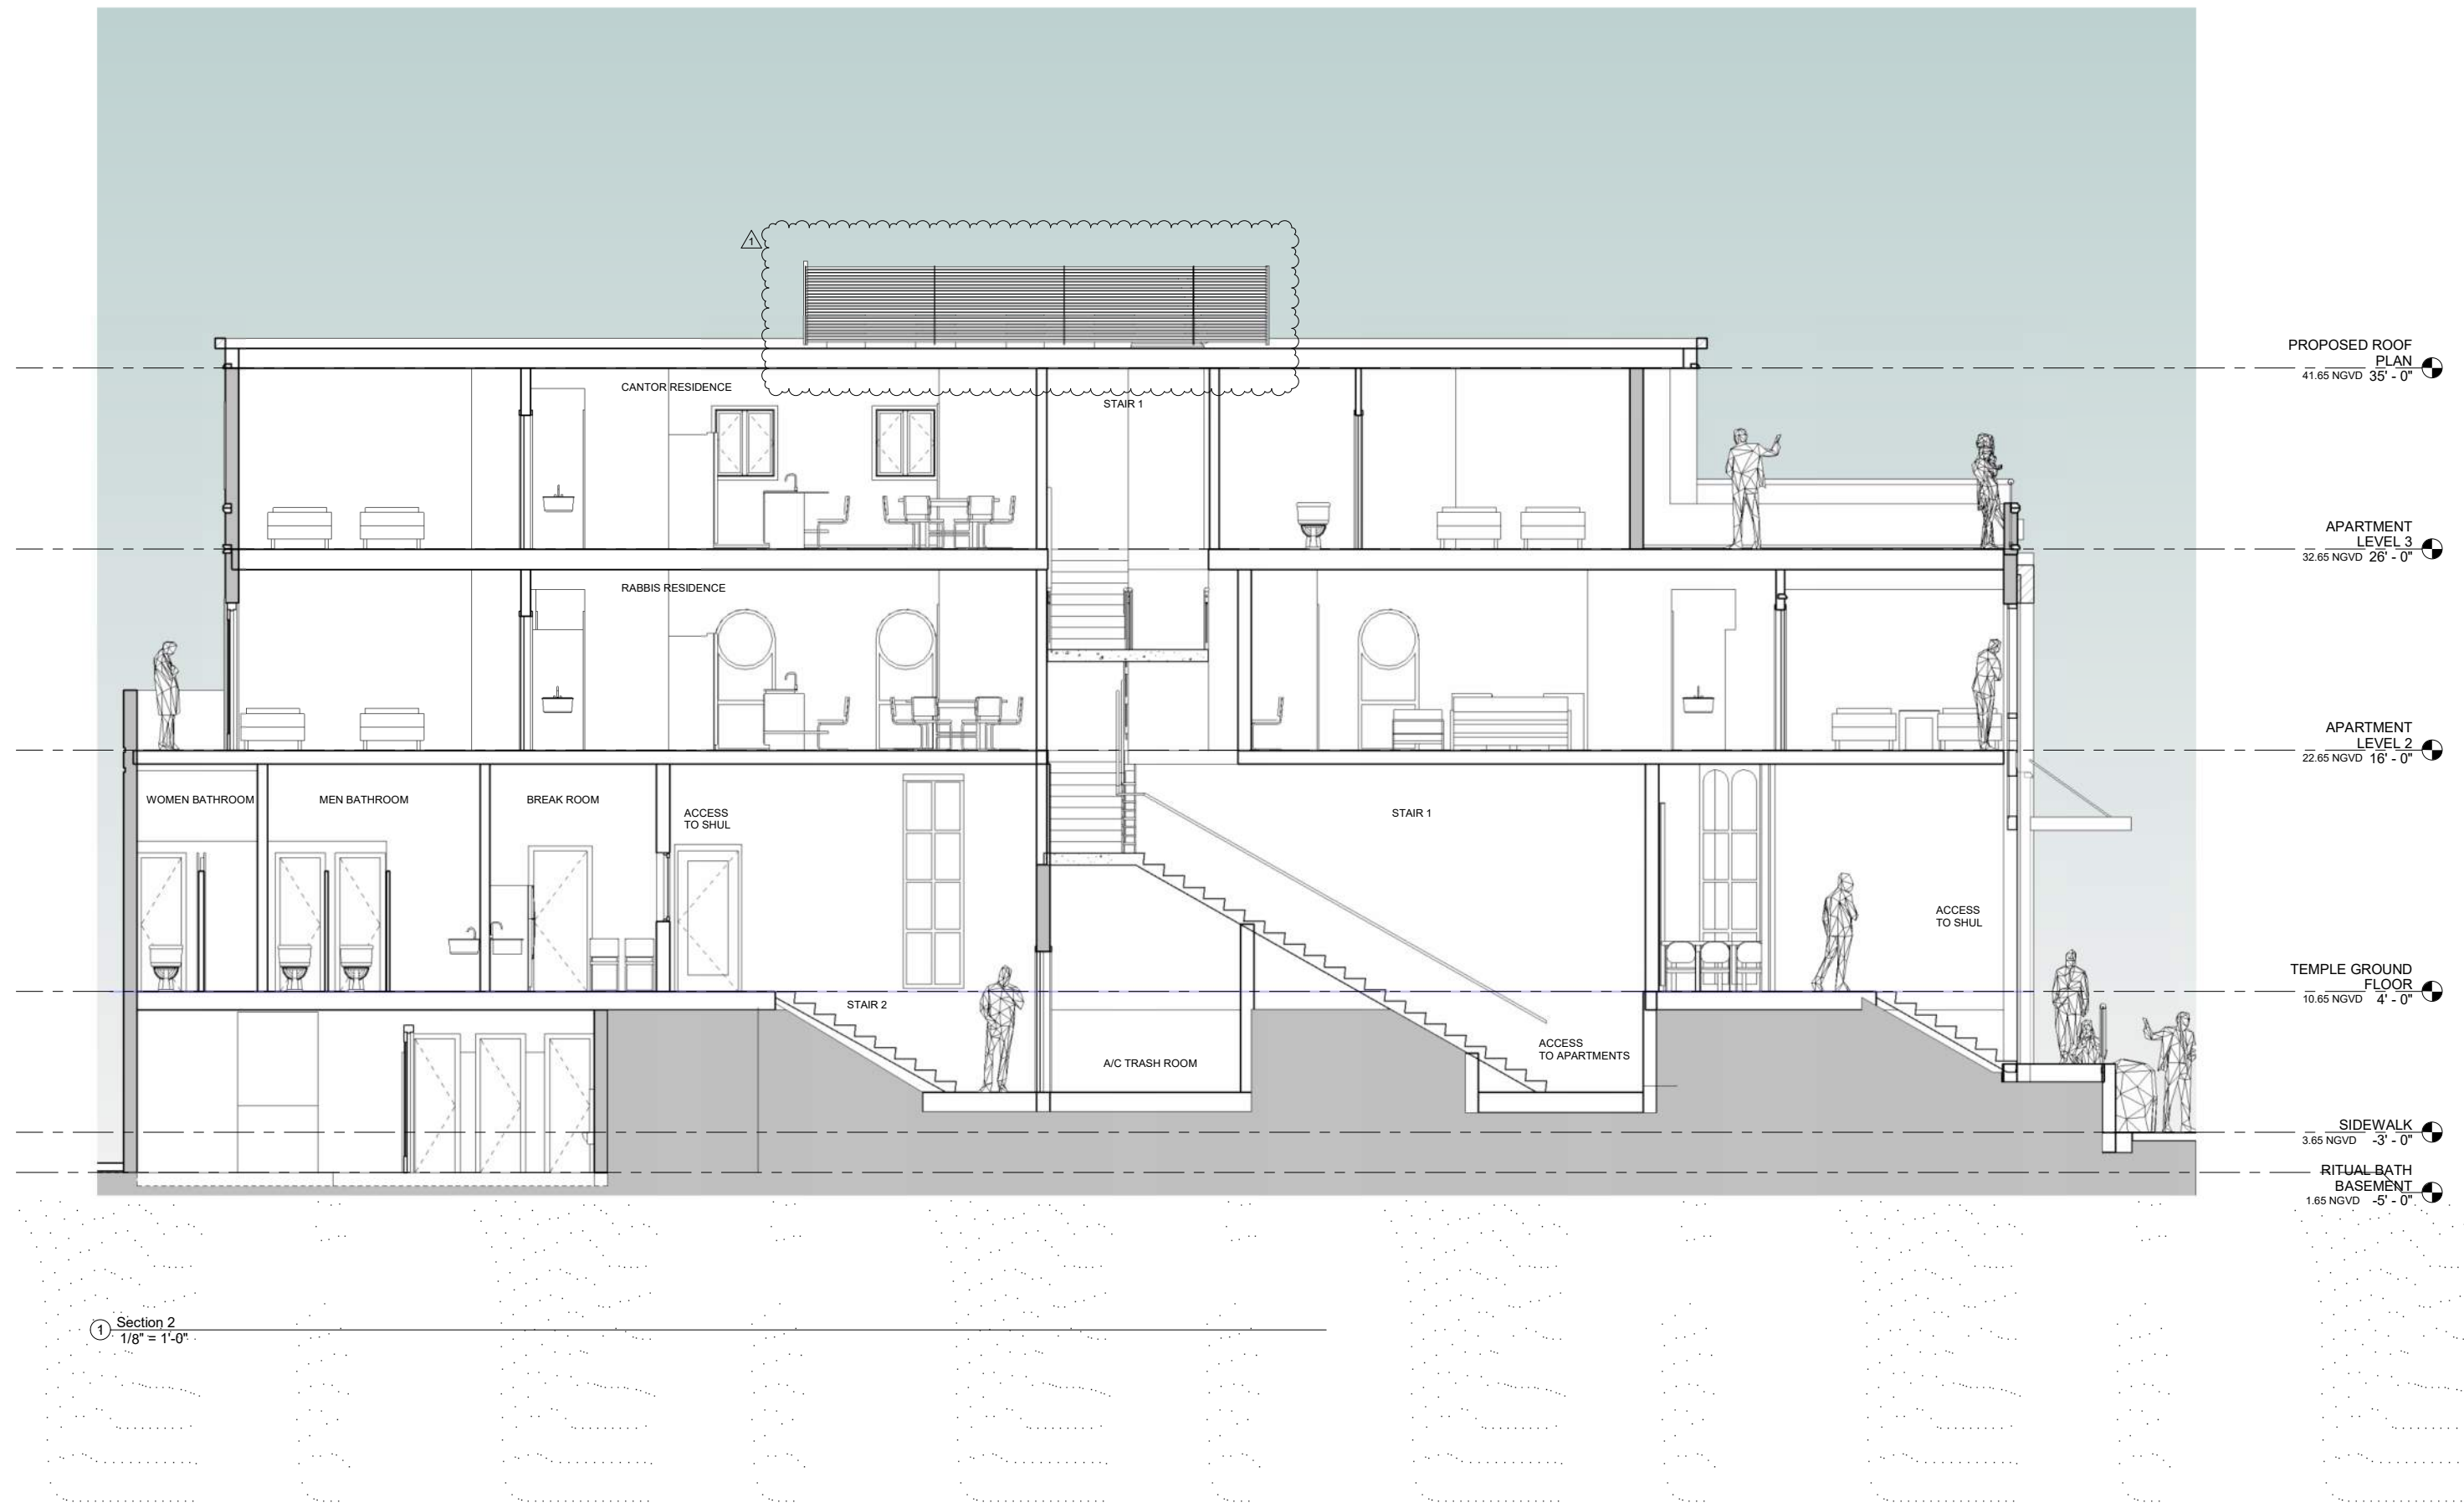

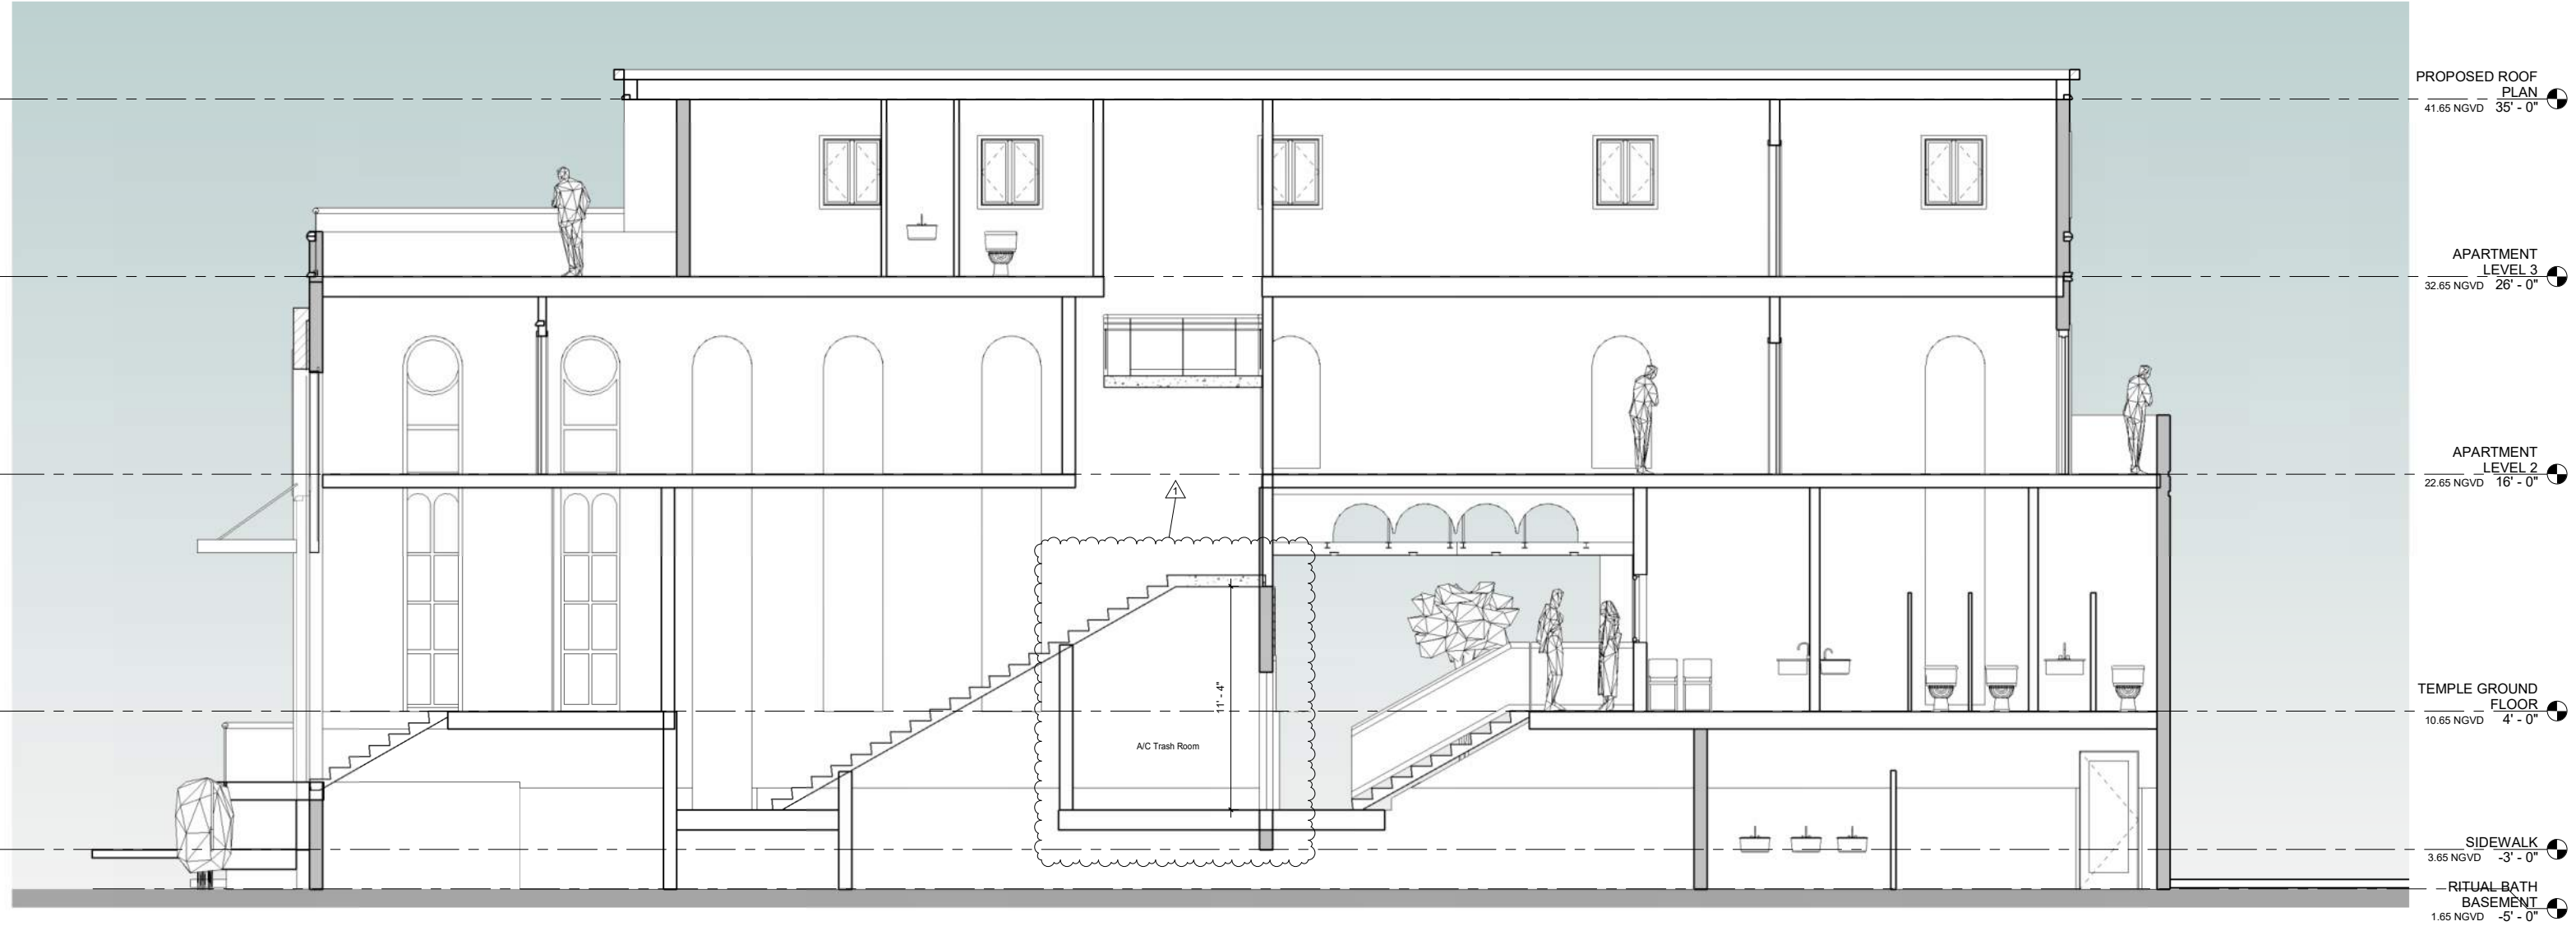

① Section 3
1/8" = 1'-0"



SOUTH WEST VIEW
NORTH WEST VIEW




SOUTH VIEW





SOUTH EAST VIEW
NORTH EAST VIEW



LANDSCAPE LEGEND			
	QTY	NAME	HGT.
1	8	Roystonea Regia / Royal Palm	10 FEET H
2	30	Clusia Guttifera	4 FEET H
3	700 sf	Sod St Augustine	
4	10	Bougainvillea Glabra	7 FEET H

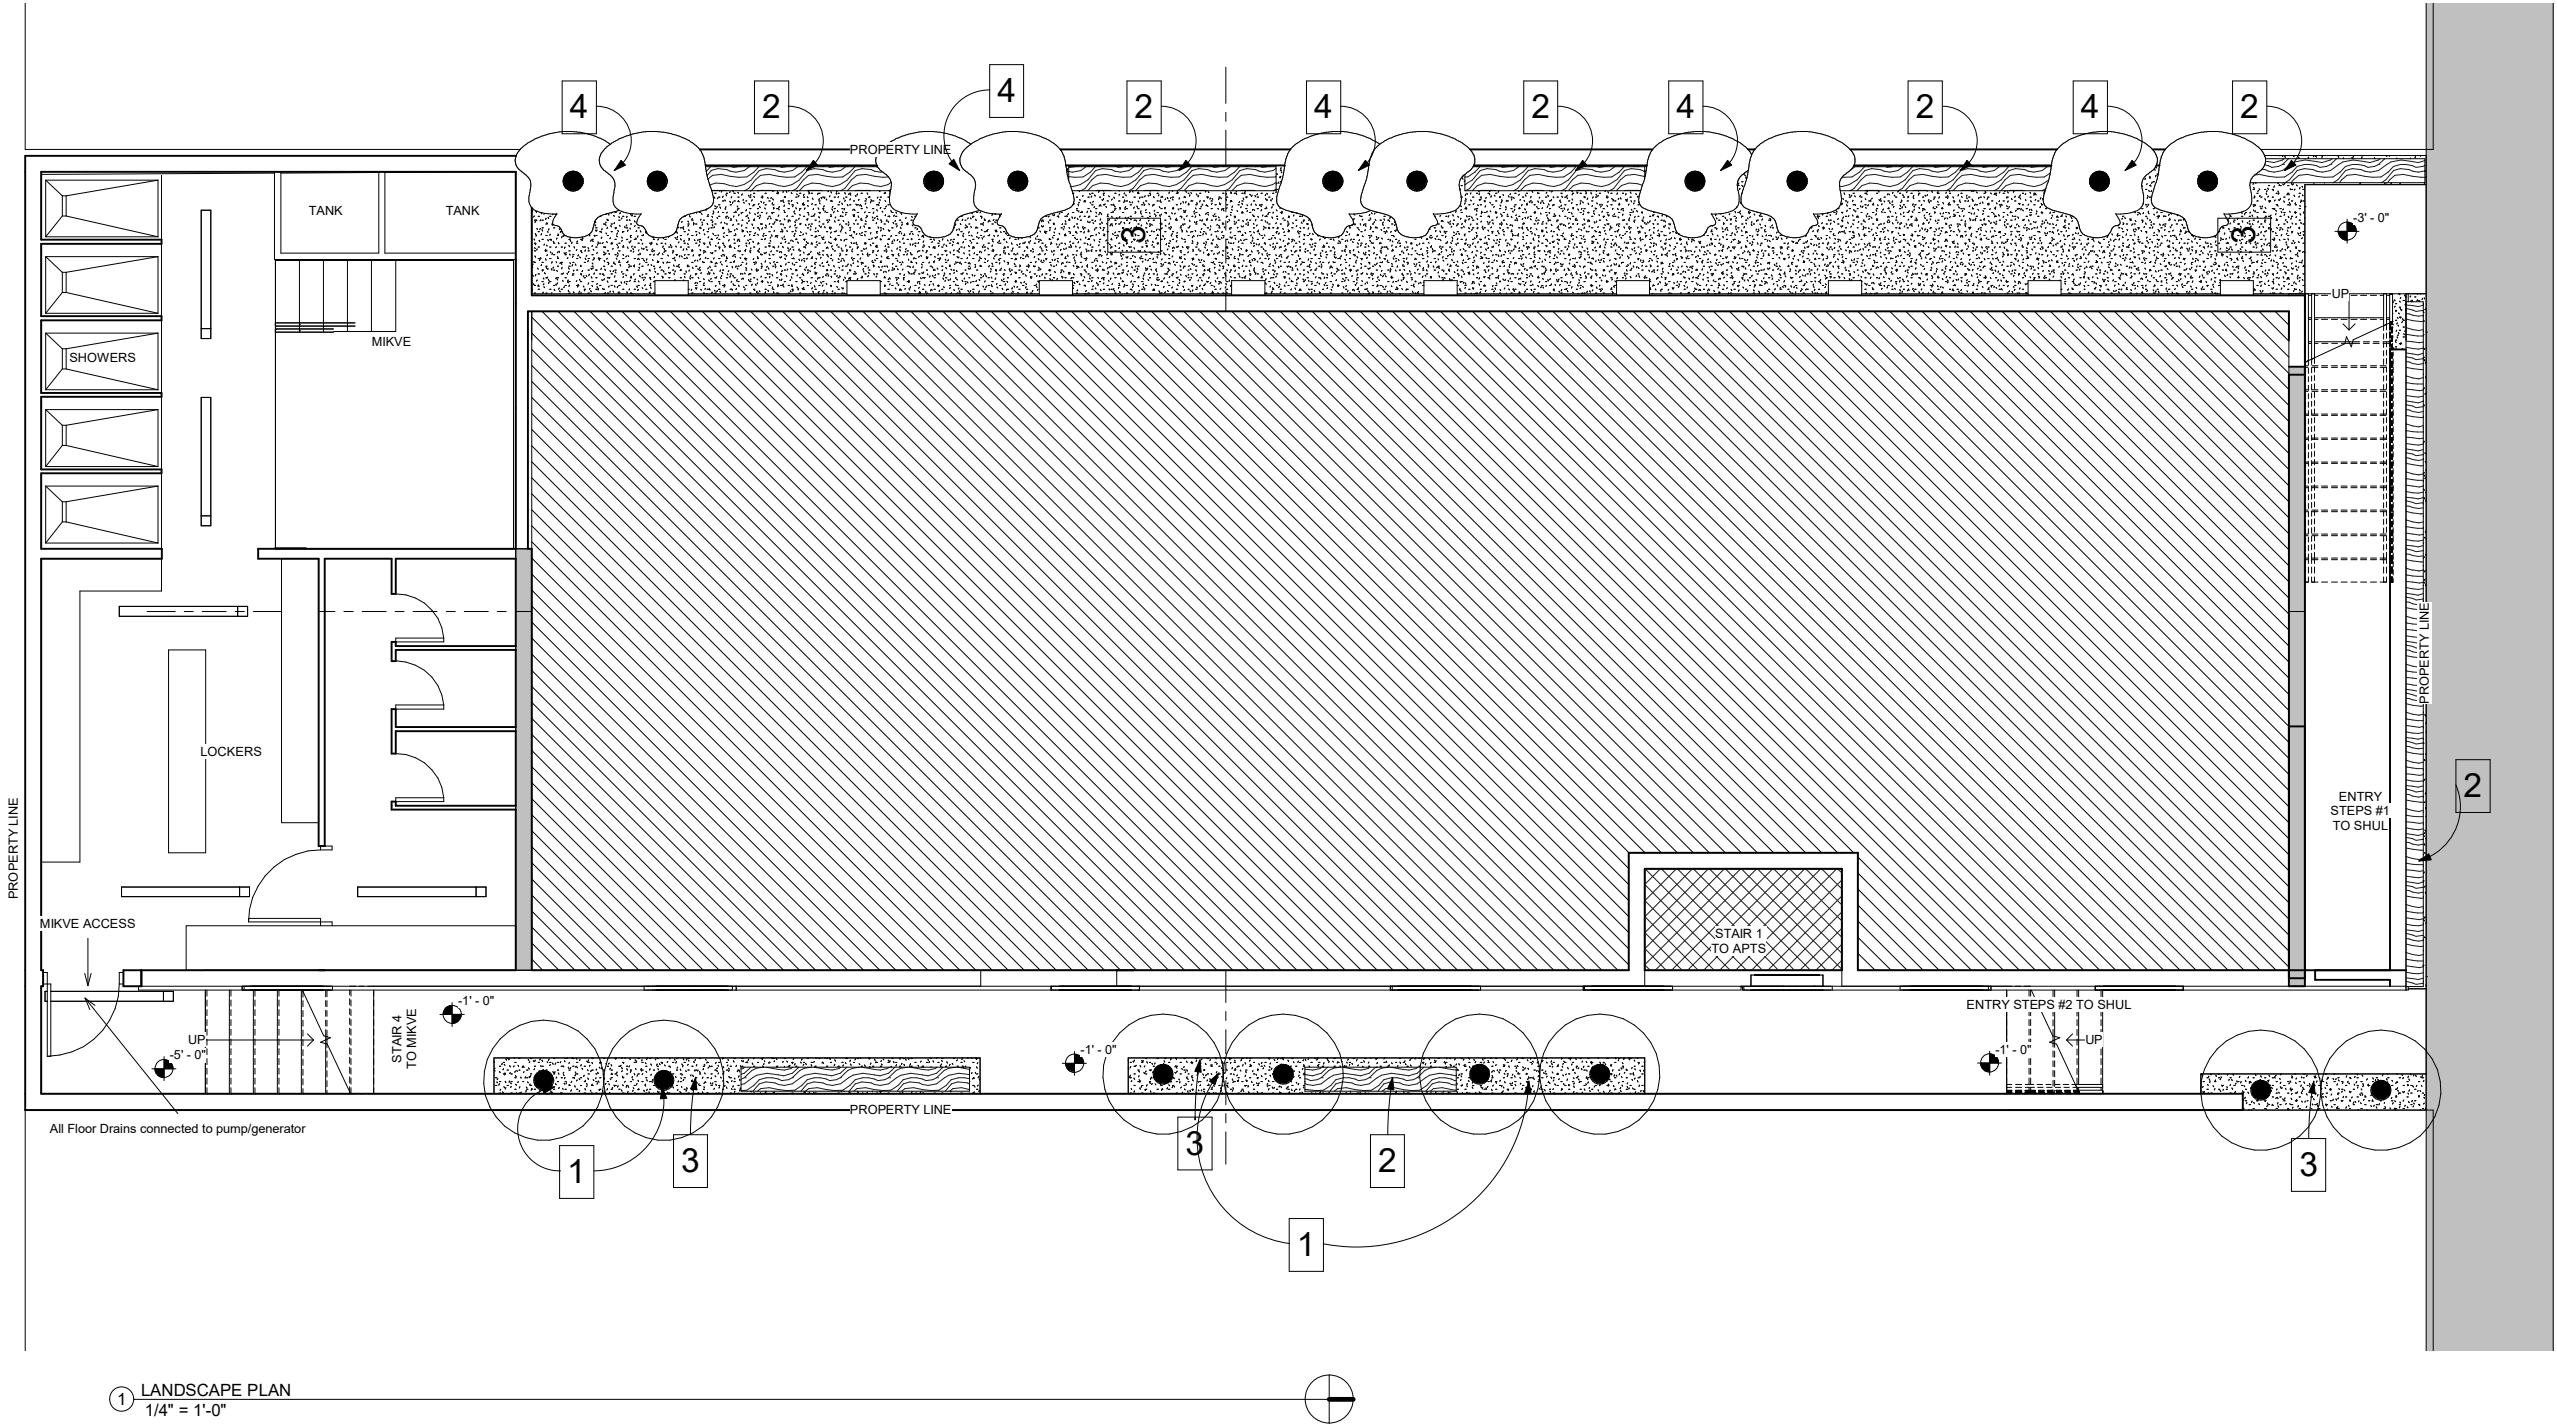

1 LANDSCAPE PLAN
1/4" = 1'-0"

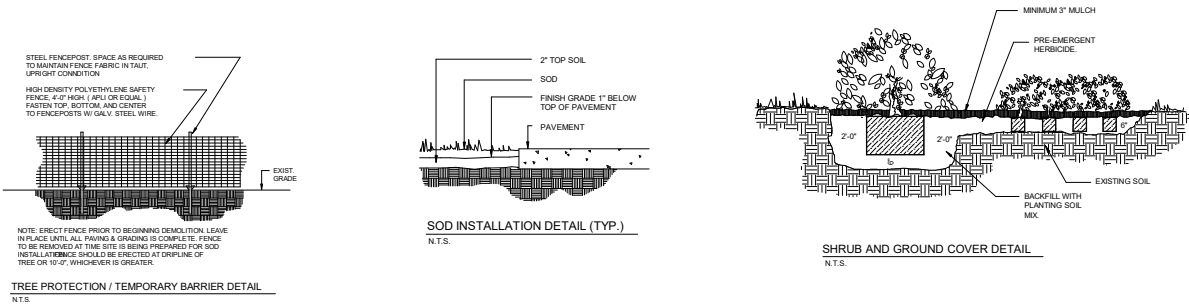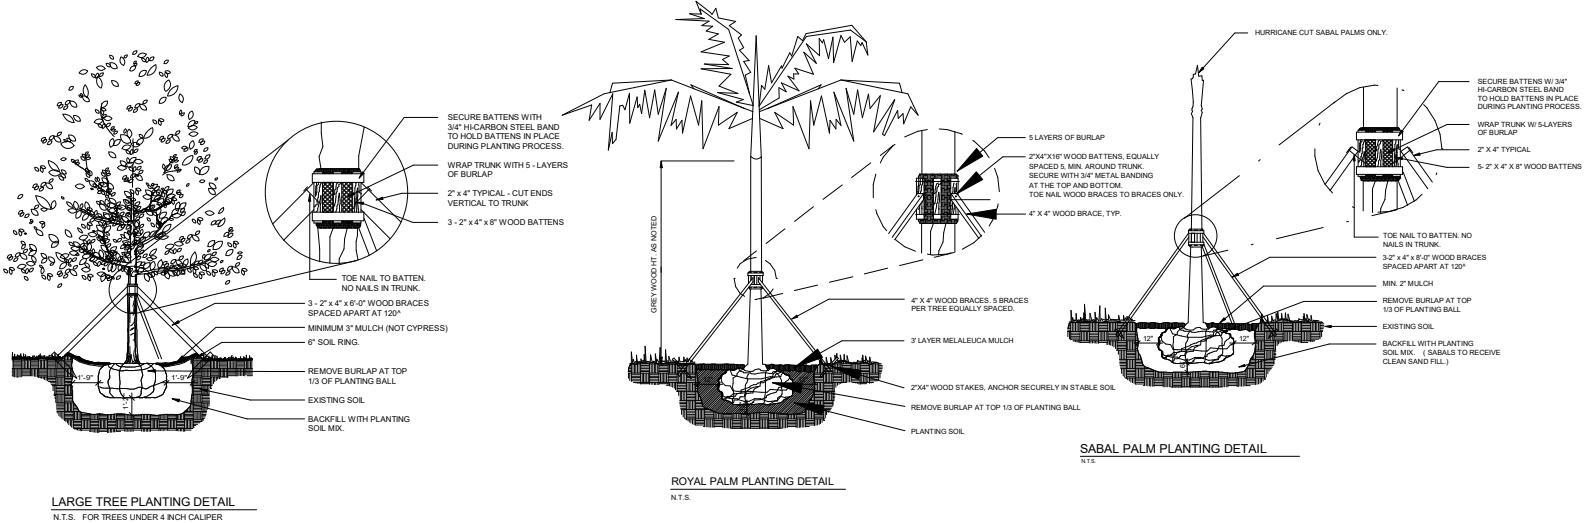

LANDSCAPE NOTES:

1. LANDSCAPE:

A. GENERAL: CONDITIONS AND REQUIREMENTS

- 1) WORK TO INCLUDE FURNISHING LABOR, MATERIALS, TOOLS AND EQUIPMENT, OBTAINING NECESSARY PERMITS; INSTALLING ALL MATERIALS NECESSARY TO COMPLETE IN PLACE THE LANDSCAPING AS SHOWN ON THE PLANS AND AS HEREIN SPECIFIED.
- 2) THE INSTALLATION SHALL COMPLY WITH ALL REGULATIONS OF THE COUNTY AND THE STATE OF FLORIDA. ALL LICENSES, PERMITS AND INSPECTIONS REQUIRED SHALL BE OBTAINED AND PAID FOR BY THE CONTRACTOR. AT COMPLETION OF THE WORK, THE CONTRACTOR WILL TRANSMIT ALL APPLICABLE CERTIFICATES OF INSPECTION TO THE OWNER, OR AUTHORIZED REPRESENTATIVE.
- 3) THE CONTRACTOR AND THE LANDSCAPE SUBCONTRACTOR SHALL PROVIDE A QUALIFIED FOREMAN PRESENT ON THE SITE AT ALL TIMES. THE FOREMAN SHALL BE WELL-VERSED IN READING AND UNDERSTANDING PLANS. THE LANDSCAPE FOREMAN SHALL BE KNOWLEDGEABLE ABOUT SOUTH FLORIDA PLANT MATERIAL AND ITS PROPER HANDLING. THE FOREMAN SHALL BE A FULLY AUTHORIZED AGENT OF THE CONTRACTOR, CAPABLE OF MAKING ON-SITE DECISIONS.

B. MATERIALS:

- 1) PLANT SIZES: ALL SIZES SHOWN FOR PLANT MATERIALS ON THE PLAN ARE TO BE CONSIDERED AS MINIMUMS. ALL PLANT MATERIAL MUST MEET OR EXCEED THESE MINIMUM REQUIREMENTS FOR BOTH HEIGHT AND SPREAD. ANY OTHER REQUIREMENTS FOR SPECIFIC SHAPE OR EFFECT AS NOTED ON THE PLAN WILL ALSO BE REQUIRED FOR ACCEPTANCE.
- 2) PLANT QUALITY: ALL PLANT MATERIAL FURNISHED BY THE LANDSCAPE CONTRACTOR, UNLESS OTHERWISE SPECIFIED, SHALL BE FLORIDA NO.1, OR BETTER, AND SHALL BE INSTALLED AS SPECIFIED IN "GRADES AND STANDARDS FOR NURSERY PLANTS", LATEST EDITION.
- 3) PLANTS NOT LISTED IN "GRADES AND STANDARDS FOR NURSERY PLANTS" SHALL CONFORM TO THE FLORIDA STANDARDS SPECIFIED FOR PLANTS LISTED WITH SIMILAR GROWTH HABITS. THE PLANT STANDARDS TO BE MET INCLUDE FREEDOM FROM PEST AND MECHANICAL DAMAGE, FOLIAGE CONDITIONS, TRUNK AND BRANCHING HABIT, AND ROOT CONDITION.
- 4) BALLED AND BURLAPPED (B&B) PLANTS SHALL BE HANDLED BY THE ROOTBALL ONLY. PLANTS WITH CRACKED OR LOOSE ROOTBALLS WILL NOT BE ACCEPTED. ROOTBALLS ARE TO BE A SIZE NORMAL TO SOUND NURSERY PRACTICE. ROOT SYSTEMS SHALL BE WELL-BRANCHED AND FIBROUS.

- 5) CONTAINER GROWN PLANTS SHALL BE WELL-ROOTED. PLANTS THAT ARE ROOTBOUND OR ARE DISPROPORTIONATELY LARGE FOR THE CONTAINER SIZE WILL NOT BE ACCEPTED.

- 6) PLANTS GROWN IN FLATS SHALL BE WELL-ROOTED AND HEAVILY FOLIAGED.

- 7) ROOT PRUNING: PLANTS SHALL BE ROOTPRUNED OR PREPARED AS NECESSARY TO AVOID TRANSPANTING CAUSED DIEBACK, OR DEFOLIATION IN EXCESS OF TWENTY-FIVE PERCENT UNLESS ATTRIBUTED TO SEASONAL CHANGE. PLANTS EXHIBITING THESE CHARACTERISTICS WILL BE REMOVED AT THE REQUEST OF THE OWNER, OR AUTHORIZED REPRESENTATIVE.

- 8) PALMS: ALL PALMS SHALL BE FLORIDA GRADE NO. 1, OR BETTER, AS SPECIFIED IN "GRADES AND STANDARDS FOR NURSERY PLANTS" PART II.

UNLESS OTHERWISE SPECIFIED, ALL NON-SABAL PALMETTO SHALL BE FREE OF FROND BOOTS. PALMS WITH BURNED OR IRREGULAR TRUNKS, TRUNKS WITH NAILS IN THEM, OR CABLE AND OTHER MECHANICAL SCARS WILL BE UNACCEPTABLE. REMOVE ALL DEAD FRONDS AND TAPER TRIM BY NO MORE THAN ONE-THIRD OF PALM HEAD.

- 9) SUBSTITUTIONS: SUBSTITUTIONS OF PLANT TYPE OR SIZE WILL NOT BE ACCEPTED UNLESS SUBSTANTIAL DOCUMENTATION IS SUBMITTED SHOWING THE UNAVAILABILITY OF THE PARTICULAR PLANT TYPE OR SIZE.

- 10) PLANTING SOIL: ALL PLANT MATERIAL INSTALLED SHALL BE PLANTED WITH TOPSOIL THAT IS CLEAN AND AND COMPLETELY FREE OF CONSTRUCTION DEBRIS, WEEDS, VIABLE WEED SEEDS, NOXIOUS PESTS, ROCKS, DISEASE, AND MATERIALS. THE TOPSOIL IS TO BE FIFTY PERCENT MUCK AND FIFTY PERCENT SAND.

- 11) MULCH: ALL MULCH SHALL BE FLORAMULCH MELALEUCA MULCH OF UNIFORM SIZE AND APPEARANCE.

C. INSTALLATION:

- 1) PLANTING BEDS: THE PLANTING BEDS SHALL BE PREPARED TO PROVIDE ADEQUATE DRAINAGE FOR GOOD PLANT GROWTH. THE CONTRACTOR SHALL REPORT IN WRITING ANY CONTAMINANTS DISCOVERED IN A PLANTING BED THAT WOULD INHIBIT GOOD PLANT GROWTH TO THE OWNER, OR HIS AGENT, PRIOR TO PLANTING IN SUCH A CONTAMINATED PLANT BED.

- 2) FERTILIZER: TREES AND SHRUBS SHALL BE FERTILIZED WITH 21 GRAM AGRIFORM FERTILIZER TABLETS WITH A 20-10-5 NITROGEN, PHOSPHOROUS, AND POTASSIUM ANALYSIS AT THE APPLICATION RATES AS FOLLOWS:

CONTAINER SIZE: APPLICATION RATE:

#1 CONTAINER	1 TABLET
#3 CONTAINER	2 TABLETS
#5 CONTAINER	3 TABLETS
#7 CONTAINER	5 TABLETS

B&B SHRUBS AND SHRUBS IN LARGE CONTAINERS	1 TABLET FOR EACH ONE FOOT OF HEIGHT
---	--------------------------------------

TREES - 1 TABLET FOR EACH 1/2 INCH OF TRUNK DIAMETER MEASURED 18" ABOVE FINISHED GRADE

PALMS SHALL BE FERTILIZED WITH A MINIMUM FIFTY PERCENT ORGANIC FERTILIZER CONTAINING NITROGEN, PHOSPHOROUS AND POTASSIUM AS MAJOR ELEMENTS AND CONTAINING MINOR ELEMENTS INCLUDING IRON, MANGANESE, MAGNESIUM AND ZINC. APPLICATION SHALL BE ACCORDING TO MANUFACTURER'S SPECIFICATIONS.

AREAS TO BE SODDED SHALL BE FERTILIZED WITH A FIFTY PERCENT ORGANIC 6-6-6 NITROGEN, PHOSPHOROUS, AND POTASSIUM ANALYSIS FERTILIZER WITH IRON, MAGNESIUM AND MANGANESE AS MINOR ELEMENTS. APPLICATION SHALL BE AT THE RATE OF ONE POUND OF ACTUAL NITROGEN PER ONE THOUSAND SQUARE FEET AND SHALL BE FULLY INCORPORATED INTO THE TOP TWO INCHES OF SOIL.

FERTILIZE GROUND COVER AREAS WITH AN EQUAL ANALYSIS OF GRANULAR FERTILIZER SUCH AS 12-6-8 AND THE NITROGEN DERIVED FROM UREA FORM. MINOR ELEMENTS SHALL INCLUDE IRON, ZINC, AND MANGANESE. INCORPORATE INTO THE TOP EIGHT (8) INCHES OF SOIL AT THE RATE RECOMMENDED BY THE MANUFACTURER FOR NEW PLANT BEDS.

- 3) MULCH: ALL TREES IN SOD AREAS ARE TO HAVE A THIRTY INCH RING COVERED WITH A THREE INCH LAYER OF MELALEUCA MULCH. COVER ALL SHRUB BEDS WITH A TWO INCH LAYER OF MELALEUCA MULCH. MULCH PLANTS WITHIN TWENTY-FOUR HOURS OF PLANTING.

- 4) WATERING: HAND WATERING SHALL BE DONE AS NEEDED TO KEEP THE PLANT ROOT MASSES AND PLANTING SOIL UNIFORMLY MOIST TO MAINTAIN A HEALTHY GROWING CONDITION UNTIL FINAL JOB ACCEPTANCE BY THE OWNER, OR AUTHORIZED REPRESENTATIVE. ANY PLANTS WITH ROOT MASSES THAT DRY OUT WILL NOT BE ACCEPTABLE.

- 5) SODDING: PLACE ST. AUGUSTINE 'FLORITAM' SOLID SOD IN ALL AREAS NOT COVERED WITH PLANT MATERIAL OR PAVING AS NOTED ON THE PLANS. THE SOD AND SOD BED SHALL BE MOIST AT TIME OF INSTALLATION. THE SOD SHALL BE THICK, WELL-MATTED AND EVENLY CUT. THE SOD SHALL BE STRONG ENOUGH SO IT RETAINS ITS SHAPE WHEN HANDLED BY THE TOP GRASS BLADES. THE SOD PIECED SHALL BE A MINIMUM 12" X 24" SIZE. THE SOD BED IS TO BE WELL-COMPACTED AND EVEN. THE SOD SHALL BE LAID BY HAND SO THERE ARE NO GAPS OR VOIDS BETWEEN PIECES. STAGGER THE SOD PIECES BETWEEN ROWS. ON SLOPES, THE ROWS SHALL RUN 90° TO THE SLOPE DIRECTION. ROLL OR HAND TAMP THE SOD IMMEDIATELY AFTER INSTALLATION AND COMMENCE WATERING. THE SOD LEVEL SHALL BE SET SO WATERFLOW FROM ADJACENT SURFACES IS NOT IMPEDED. MAINTENANCE OF THE SOD WILL BE THE RESPONSIBILITY OF THE CONTRACTOR UNTIL ACCEPTANCE BY THE OWNER, OR AUTHORIZED REPRESENTATIVE. MOWING SHALL BE DONE OFTEN ENOUGH SO NO MORE THAN ONE-THIRD THE HEIGHT OF THE GRASS BLADE IS REMOVED. THE SOD SHALL BE GUARANTEED FREE OF WEEDS AND PESTS THAT AFFECT ITS UNIFORM APPEARANCE FOR NINETY DAYS. SOD LINES AT SHRUB BEDS, TREE RINGS AND PAVEMENTS SHALL BE CUT EVEN AND SHARP.

- 6) TREE GUYING: ALL SINGLE STEM TREES SHALL BE SECURELY GUYED AND STAKED AT TIME OF PLANTING, USING THREE 1 3/4" BLACK WELLINGTON TAPE STAKES ARE TO BE SET BELOW FINISHED GRADE. FASTEN A MINIMUM OF ONE 6" X 1 1/2" PLASTIC FLAGGING HALFWAY UP EACH GUY WIRE.

TREE WITH NAILS IN THEIR TRUNKS OR TREES WITH OTHER MECHANICAL TRUNK DAMAGE WILL NOT BE ACCEPTABLE.

- 7) PLANTING: REMOVE THE EXCAVATED MATERIAL FROM THE PLANT HOLES AND REPLACE WITH PLANTING SOIL. SOD PLANTING AREAS ARE TO HAVE A CONTINUOUS TWO INCHES DEPTH OF PLANTING SOD. GROUND COVER PLANTING AREAS ARE TO BE EXCAVATED TO A DEPTH OF SIX INCHES. SHRUB PLANTING AREAS ARE TO BE EXCAVATED SIX INCHES DEEPER THAN THE ROOT DEPTH AND SIX INCHES GREATER IN RADIUS. TRENCH HEDGE PLANTING STRIPS SIX INCHES DEEPER THAN THE ROOT DEPTH AND SIX INCHES WIDER ON EACH SIDE OF THE PLANTS.

EXCAVATE ALL TREE PLANTING HOLES TWELVE INCHES DEEPER THAN THE ROOTBALL DEPTH. LOOSEN THE BOTTOM OF THE HOLE SIX INCHES DEEPER THAN THE REQUIRED HOLE DEPTH. TREES WITH ROOTBALLS TWO FEET IN DIAMETER OR LESS SHALL BE PLANTED IN HOLES ONE FOOT GREATER IN RADIUS. TREES WITH ROOTBALLS GREATER THAN TWO FEET AND LESS THAN FOUR FEET IN DIAMETER SHALL BE PLANTED IN HOLES EIGHTEEN INCHES GREATER IN RADIUS.

SET ALL PLANTS ON A FIRM WELL COMPACTED BASE IN A STRAIGHT UPRIGHT POSITION AT THE SAME DEPTH AS BEFORE TRANSPANTING SO THE TOP OF THE ROOTBALL IS EQUAL TO THE LEVEL OF THE SURROUNDING FINISHED GRADE. WHEN BACKFILLING AROUND THE PLANTS, TAMP AND WATER IN THE TOP SOIL TO ELIMINATED AIRPOCKETS. RELEVEL AND FILL ANY AREAS THAT SETTLE AFTER COMPLETION OF THE JOB. THE OWNER OR AUTHORIZED REPRESENTATIVE WILL REQUIRE PLANTS BE RESET IF NOT SET PROPERLY.

- 8) PRUNING: ALL PRUNING SHALL BE DONE IN ACCORDANCE WITH STANDARDS SET FORTH BY THE INTERNATIONAL SOCIETY OF ARBORICULTURE. LIMIT PRUNING TO BROKEN OR DAMAGE STEMS. PRUNE BACK TO THE PARENT STEM IF NECESSARY TO COMPENSATE FOR ROOTS LOST IN TRANSPANTING. NO PRUNING SHALL BE DONE TO ADVERSELY AFFECT THE NATURAL HABIT OR SHAPE OF PLANTS UNLESS OTHERWISE SPECIFIED. ROOTS THAT ARE BROKEN OR JAGGED SHALL BE CUT CLEANLY. THE OWNER OR AUTHORIZED REPRESENTATIVE RESERVES THE RIGHT TO REQUIRE ADDITIONAL PRUNING FOR AESTHETIC OR OTHER REASONS.

- D. FINAL COMPLETION: THE CONTRACTOR SHALL BE RESPONSIBLE FOR LEAVING THE JOB SITE FREE OF ALL CONSTRUCTION DEBRIS AND IN AN ORDERLY STATE. CLEAN ALL WALKS, PAVING, AND SITE FEATURES OF DIRT, TIRE MARKS AND OTHER DEBRIS. WEEDING OF PLANT BEDS, PRUNING OF SHRUBS, CUTTING AND TRIMMING OF GRASS WILL BE DONE UNTIL THE JOB IS COMPLETE AND ACCEPTED BY THE OWNER OR AUTHORIZED REPRESENTATIVE. UNTIL FINAL ACCEPTANCE, THE PLANT MATERIALS ARE THE SOLE RESPONSIBILITY OF THE CONTRACTOR.

- E. GUARANTEE: ALL PLANT MATERIAL AND WORK SHALL BE GUARANTEED FOR ONE YEAR FROM DATE OF FINAL JOB ACCEPTANCE. DURING THE ONE YEAR GUARANTEE, ANY PLANT MATERIAL THAT DIES, OR IS IN AN UNHEALTHY CONDITION SHALL BE REPLACED WITH THE SAME PLANT TYPE AT LEAST EQUAL TO THE SIZE AND QUALITY ORIGINALLY SPECIFIED. THE REPLACEMENT MATERIAL SHALL ALSO BE GUARANTEED FOR ONE YEAR FROM THE DATE OF ITS INSTALLATION. THE GUARANTEE WILL BE NULL AND VOID IF PLANT MATERIAL IS DAMAGED OR KILLED BY LIGHTNING, HURRICANE FORCE WINDS, HAIL OR FREEZE.

- F. EXCESS SUITABLE MATERIAL: UPON DIRECTION OF THE OWNER, OR AUTHORIZED REPRESENTATIVE, ALL VEGETATION, DEBRIS, CONCRETE, OR OTHER UNSUITABLE MATERIALS SHALL BE DISPOSED IN A SUITABLE MANNER BY THE CONTRACTOR.

NOTES:


CONTRACTOR SHALL BE RESPONSIBLE FOR LOCATING ALL UTILITIES. CARE SHOULD BE TAKEN NOT TO DISTURB OR DAMAGE ANY UTILITIES. ANY DAMAGE WILL BE REPAIRED AT THE EXPENSE OF THE CONTRACTOR IN A MANNER APPROVED BY THE OWNER'S REPRESENTATIVE. WHERE UNDERGROUND CONSTRUCTION OR OBSTRUCTION WILL NOT PERMIT THE INSTALLATION PER PLANS, NEW LOCATIONS FOR THE PLANT MATERIAL WILL BE DESIGNATED BY THE L.A.

TREE LOCATIONS ARE TO BE STAKED IN THE FIELD PRIOR TO INSTALATION. LOCATIONS ARE SCHEMATIC AND MAY REQUIRE ADJUSTMENT. IN EVENT OF CONFLICTS WITH UTILITIES, EXISTING PLANT MATERIAL, ETC., LANDSCAPE ARCHITECT TO APPROVE FINAL LOCATIONS PRIOR TO PLANTING.

ALL TREES AND PALMS TO BE THOROUGHLY WATERED IN AT PLANTING. TREES AND PALMS SHALL BE STAKED TO ASSURE PROPER ALIGNMENT AND STABILITY.

CONTRACTOR SHALL BE RESPONSIBLE FOR VERIFYING ALL QUANTITIES FOR MATERIAL. ON DRAWINGS PRIOR TO SUBMITTING BID. THE PLANTING PLAN SHALL TAKE PRECEDENCE OVER PLANT LIST. FINAL SOD, MULCH, AND TOPSOIL QUANTITIES ARE TO BE MADE BY THE CONTRACTOR.

37th STREET

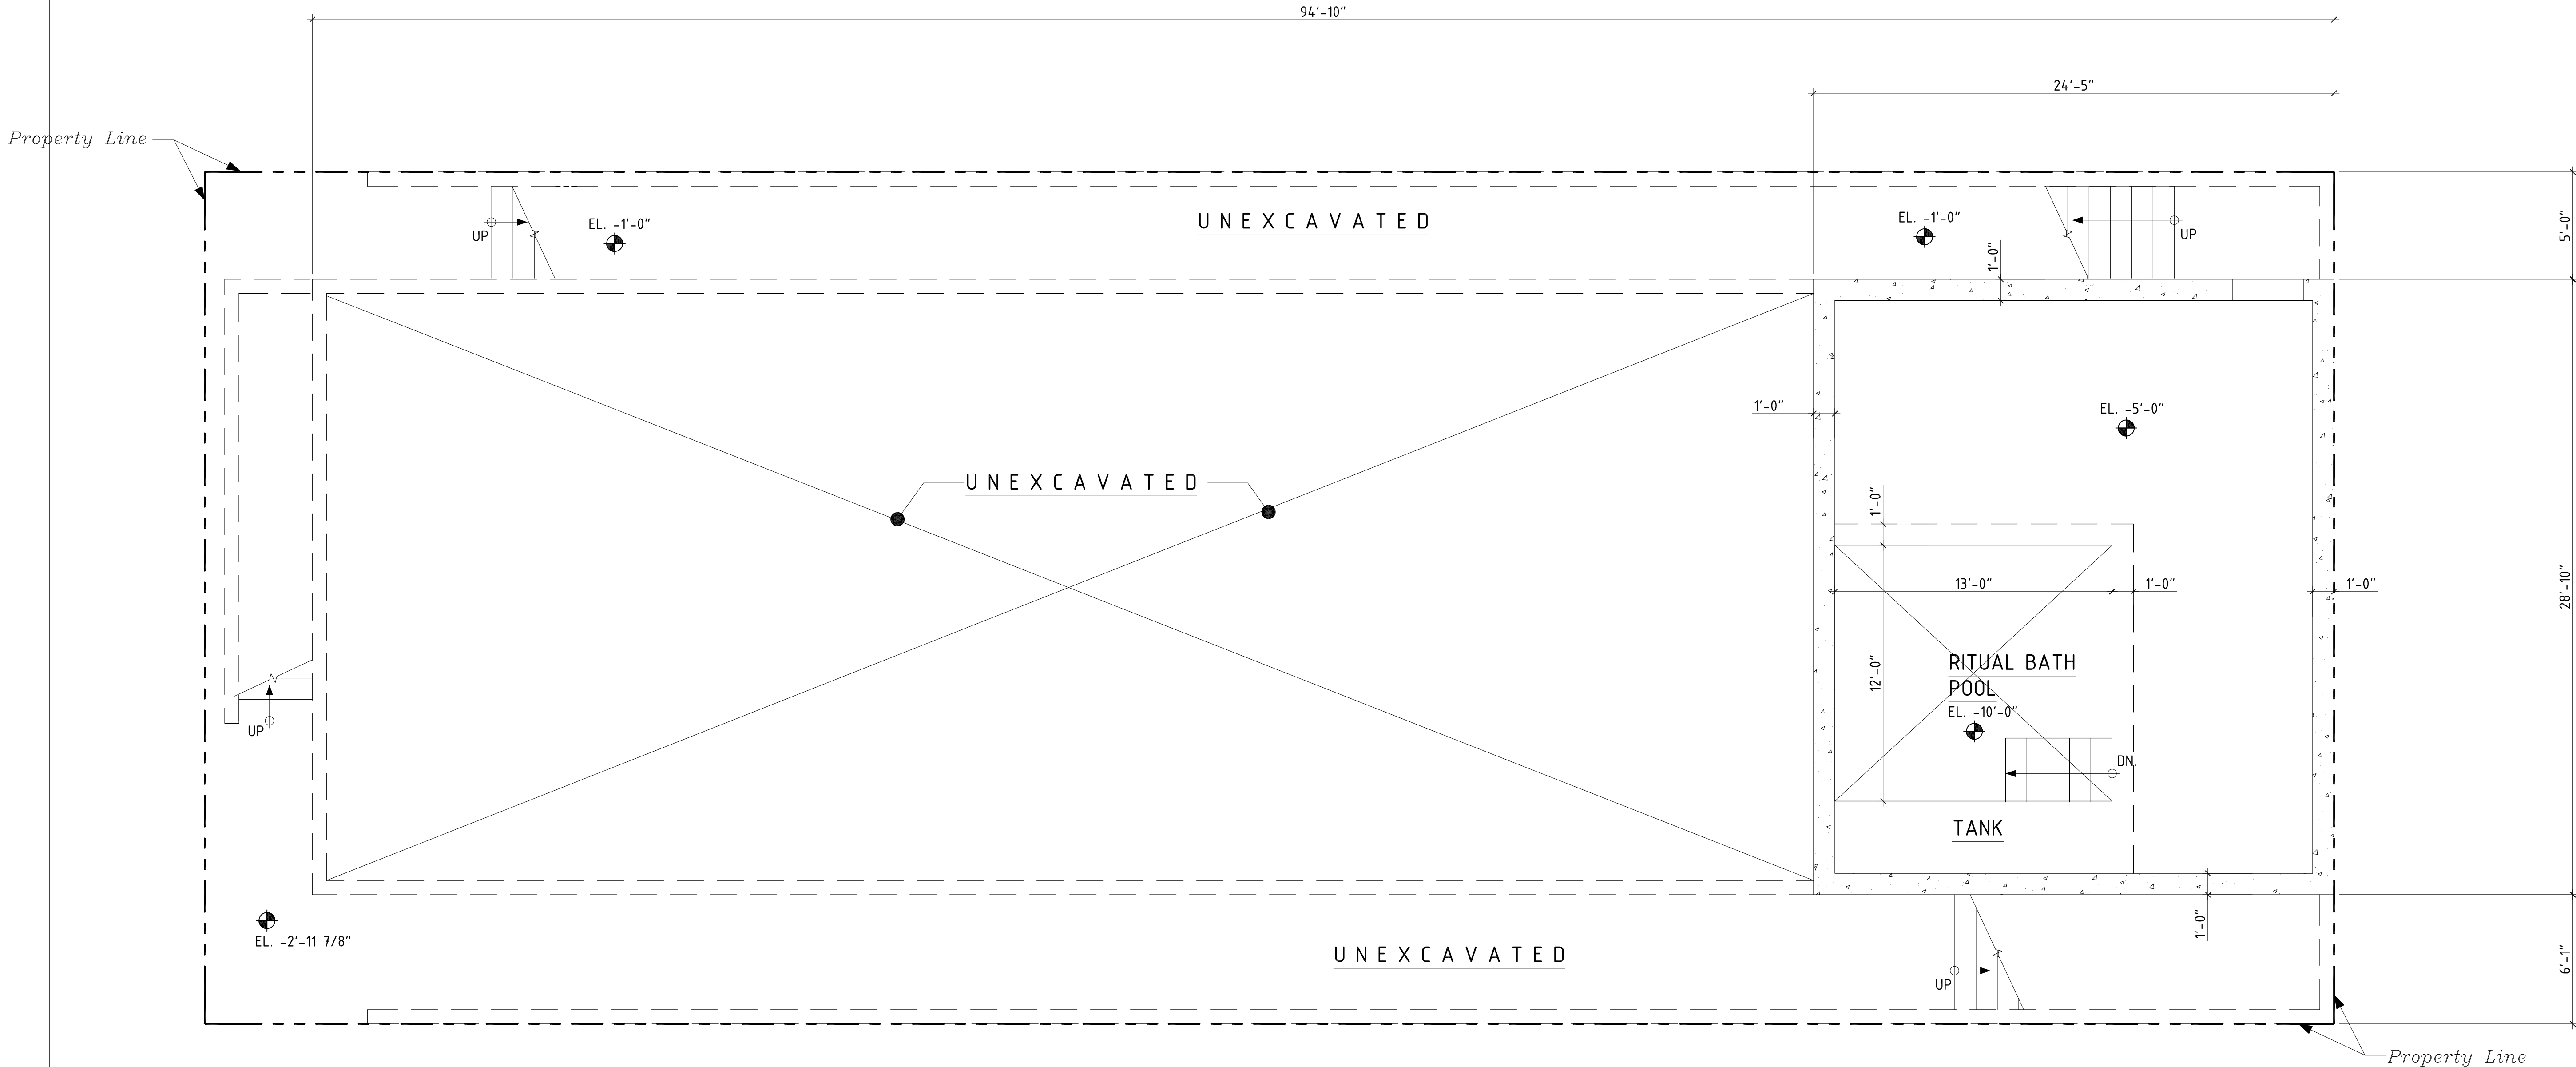

RITUAL BATH BASEMENT & FOUNDATION PLAN

SCALE: 1/4"=1'-0"


STRUCTURAL NOTES:

1. TOP OF CONC. FLOOR SLAB EL. = -5'-0"
2. NEW FOUNDATIONS (HELICAL PILES) TO BE PROVIDED UNDER NEW WALLS. NOT SHOWN FOR CLARITY.

SCOPE OF WORK:
NEW FOUNDATIONS (NOT SHOWN) FOR NEW INTERIOR WALLS SUPPORTING
VERTICAL EXTENSION AND NEW FOUNDATIONS (NOT SHOWN) FOR HORIZONTAL
EXTENSION AT REAR (INCLUDING EXCAVATED AREA)

NOTE: DRAWINGS PROVIDED FOR DEPICTION OF PROPOSED SYSTEMS ONLY. NOT
FOR CONSTRUCTION



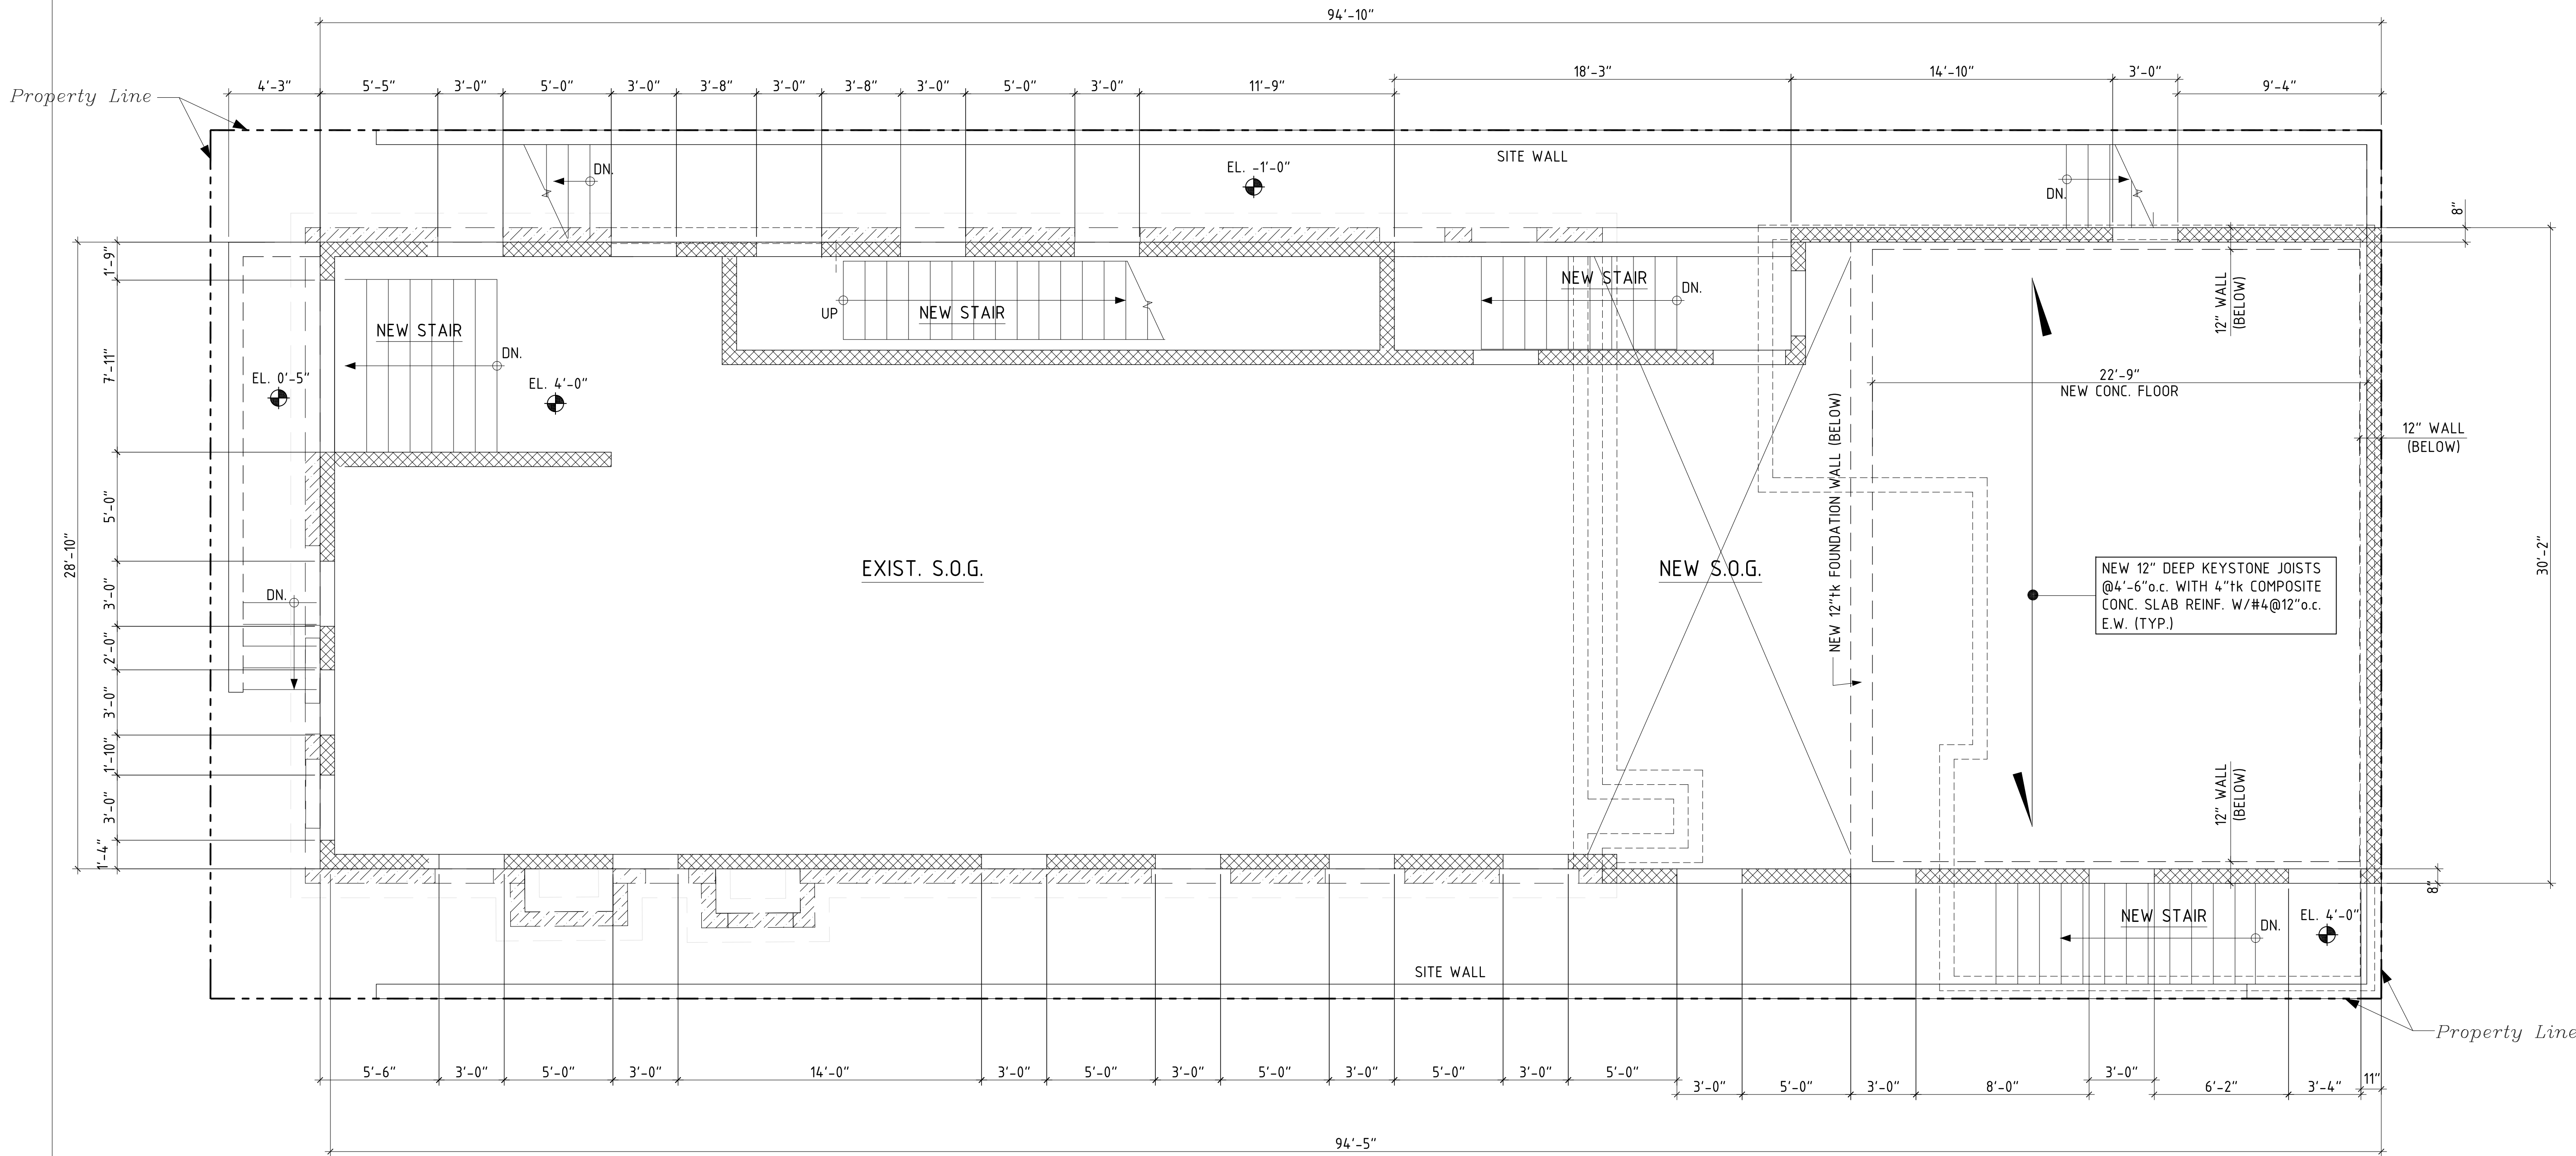

TEMPLE GROUND FLOOR & FOUNDATION PLAN

SCALE: 1/4"=1'-0"

STRUCTURAL NOTES:

1. TOP OF CONC. FLOOR SLAB EL. = 4'-0"
2. NEW FOUNDATIONS (HELICAL PILES) TO BE PROVIDED UNDER NEW WALLS. NOT SHOWN FOR CLARITY.

SCOPE OF WORK:

NEW FOUNDATIONS (NOT SHOWN) FOR NEW INTERIOR WALLS SUPPORTING VERTICAL EXTENSION AND NEW FRAMING FOR HORIZONTAL EXTENSION AT REAR

NOTE: DRAWINGS PROVIDED FOR DEPICTION OF PROPOSED SYSTEMS ONLY. NOT FOR CONSTRUCTION

LEGEND


- | | |
|--|---|
| | INDICATES NEW CMU WALL |
| | INDICATES EXISTING CMU WALL & F'TG |
| | INDICATES EXISTING STRUCTURE TO BE DEMOLISHED |
| | INDICATES NEW WALL BELOW |

PROCEDURE:

CONTRACTOR TO SUBMIT SIGNED AND SEALED SHORING PLANS INCLUDING STEP BY STEP PROCEDURES REGARDING THE REMOVAL OR MODIFICATIONS OF THE EXISTING STRUCTURE.


THE FOLLOWING PROCEDURE IS ANTICIPATED/PROPOSED:

1. INSTALL TEMPORARY SHORING AND NEEDLE BEAMS AS NEEDED TO CREATE NEW OPENING IN EXISTING FRONT WALL FOR EQUIPMENT AND MATERIAL ACCESS.
2. REMOVE 2ND FLOOR PLYWOOD, SUBFLOORING. REMOVE OPEN WEB TRUSSES WHILE MAINTAINING ONE TRUSS IN PLACE EVER 6' MAX.
3. INSTALL NEW HELICAL PILES FOR SUPPORT OF NEW LOAD BEARING STRUCTURE.
4. ERECT NEW BEARING WALLS UP TO HEIGHT OF NEW 2ND FLOOR. PROVIDE POCKETS WHERE EXISTING TRUSSES ARE TO REMAIN IN NEW BEARING WALLS TO BE INFILLED LATER.
5. DRILL REBAR PER DETAILS INTO EXISTING WALLS, LEAVE DOWELS INTO NEW 4"TK. SLAB STICKING OUT. ERECT NEW PRECAST JOISTS AND 4"TK. TOPPING SLAB.
6. REMOVE REMAINDER OF EXISTING 2ND FLOOR TRUSSES AND FILL POCKETS SOLID.
7. REMOVE EXISTING ROOF TRUSSES WHILE MAINTAINING ONE TRUSS IN PLACE EVERY 6' MAX.
8. CONTINUE WITH ERECTION OF NEW BEARING WALLS TO EXISTING ROOF/NEW 3RD FLOOR LEVEL.
9. DRILL REBAR PER DETAILS INTO EXISTING WALLS, LEAVE DOWELS INTO NEW 4"TK. SLAB STICKING OUT. ERECT NEW PRECAST JOISTS AND 4" TK. TOPPING SLAB.
10. REMOVE REMAINDER OF EXISTING ROOF TRUSSES.
11. CONTINUE WITH ERECTION OF NEW FLOORS ABOVE.




1. ISSUE TO DOB 11/08/2021

Project #M21-12



S-100.00

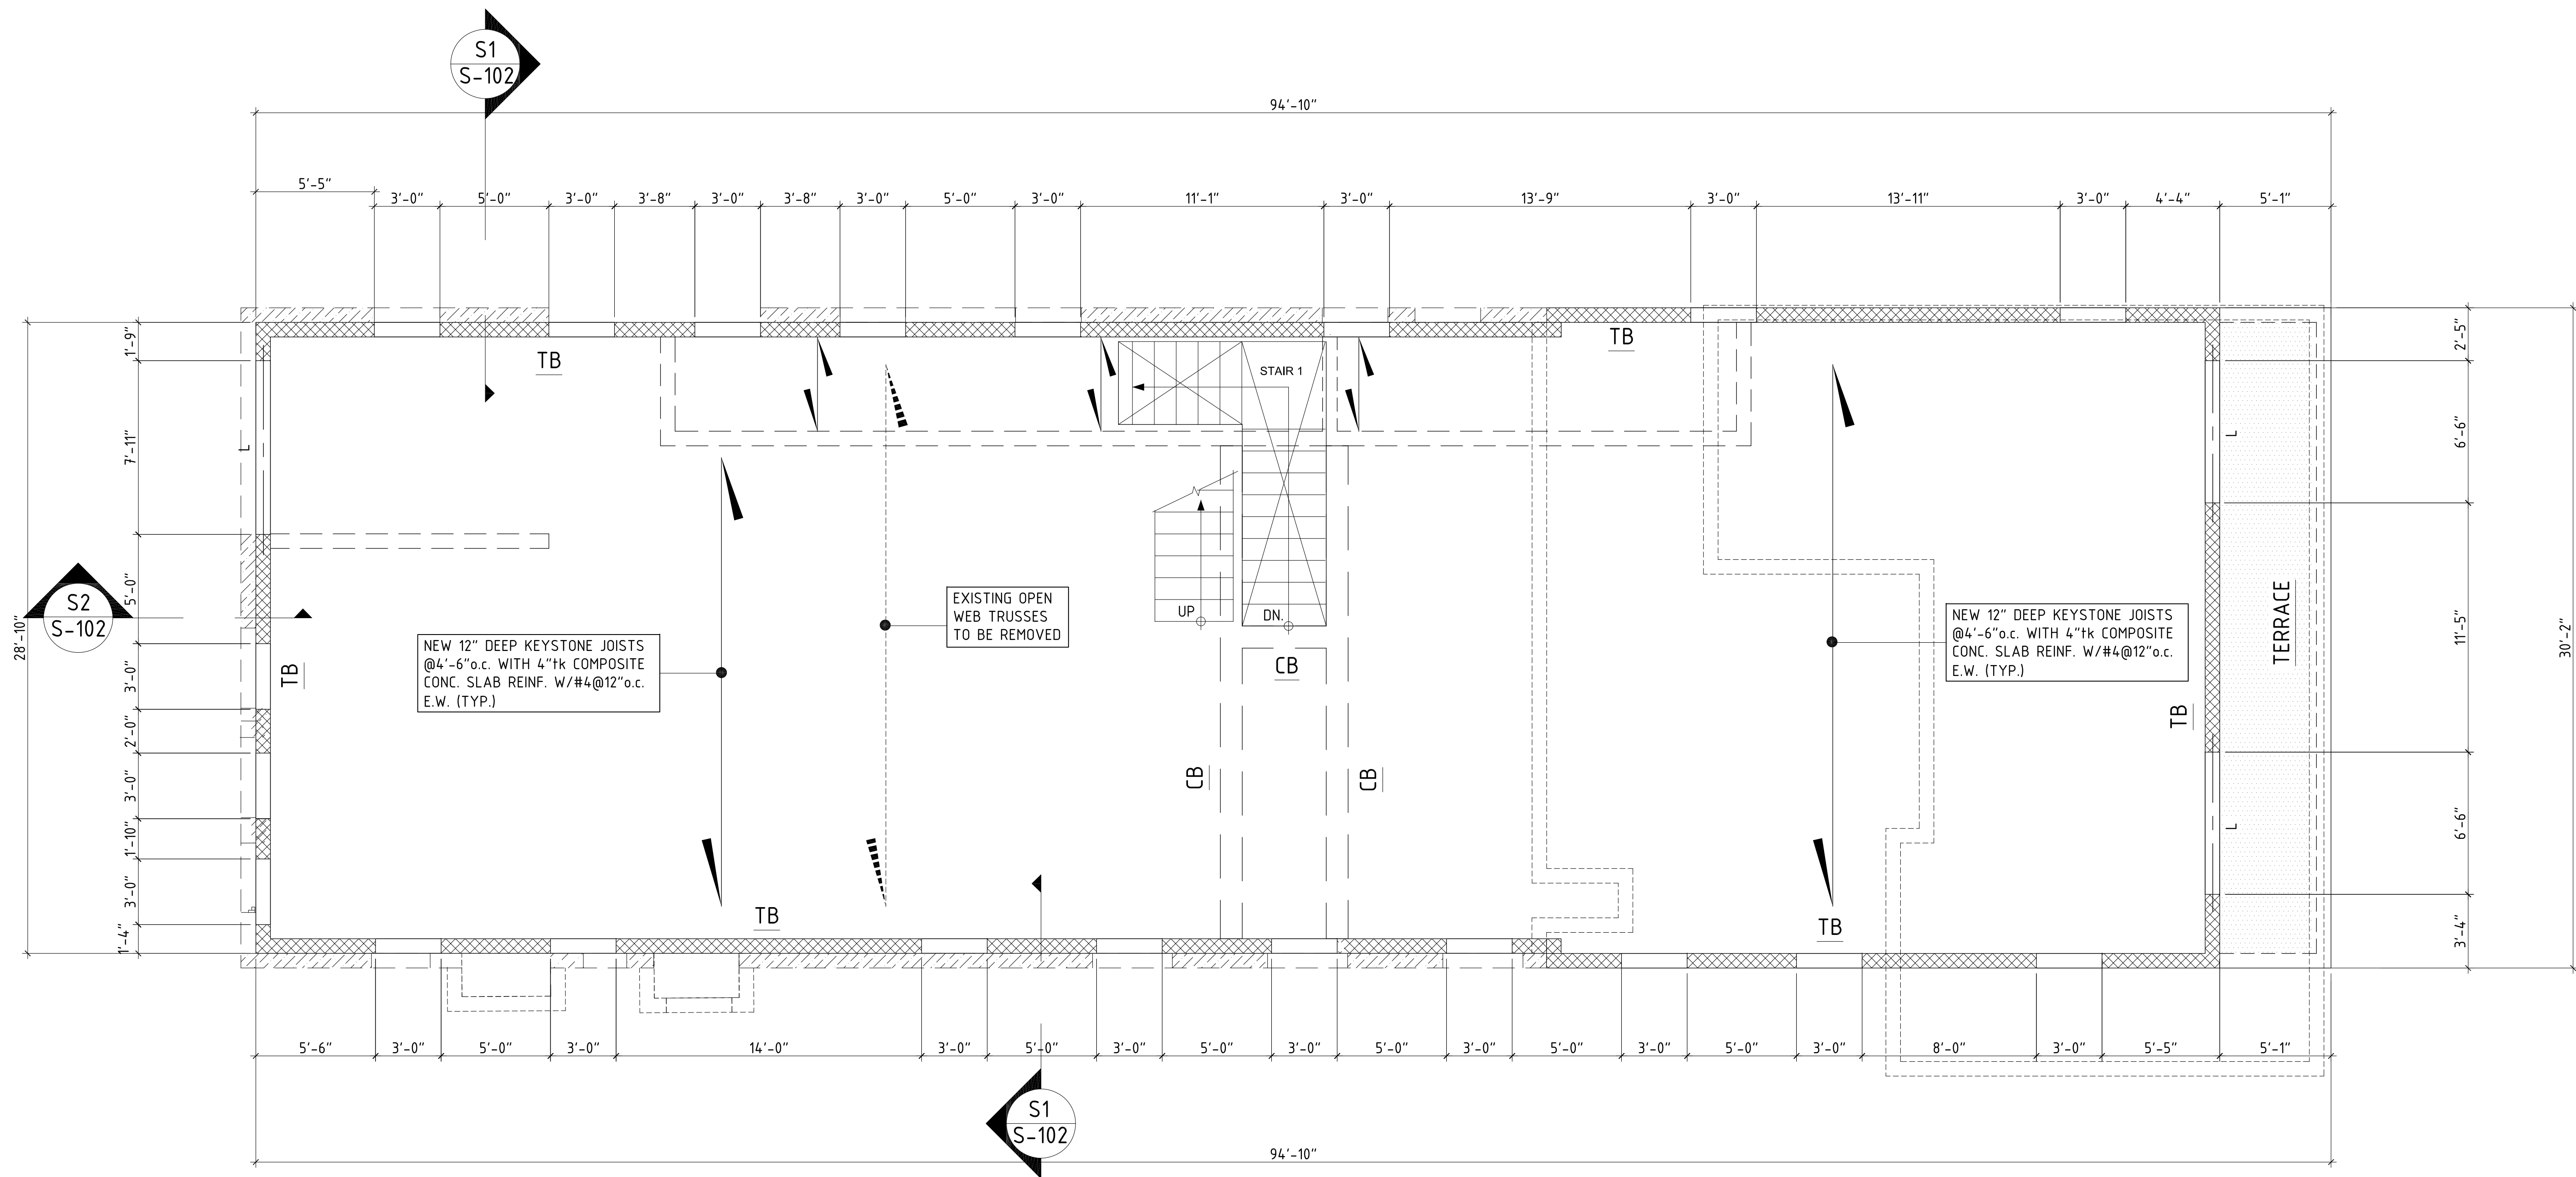

LEVEL 2 FLOOR FRAMING PLAN



SCALE: 1/4"=1'-0"

STRUCTURAL NOTES:

1. TOP OF CONC. FLOOR SLAB EL. = 16'-0"

LEGEND


- INDICATES NEW CMU WALL
- INDICATES EXISTING CMU WALL
- INDICATES EXISTING STRUCTURE TO BE DEMOLISHED
- INDICATES NEW WALL BELOW

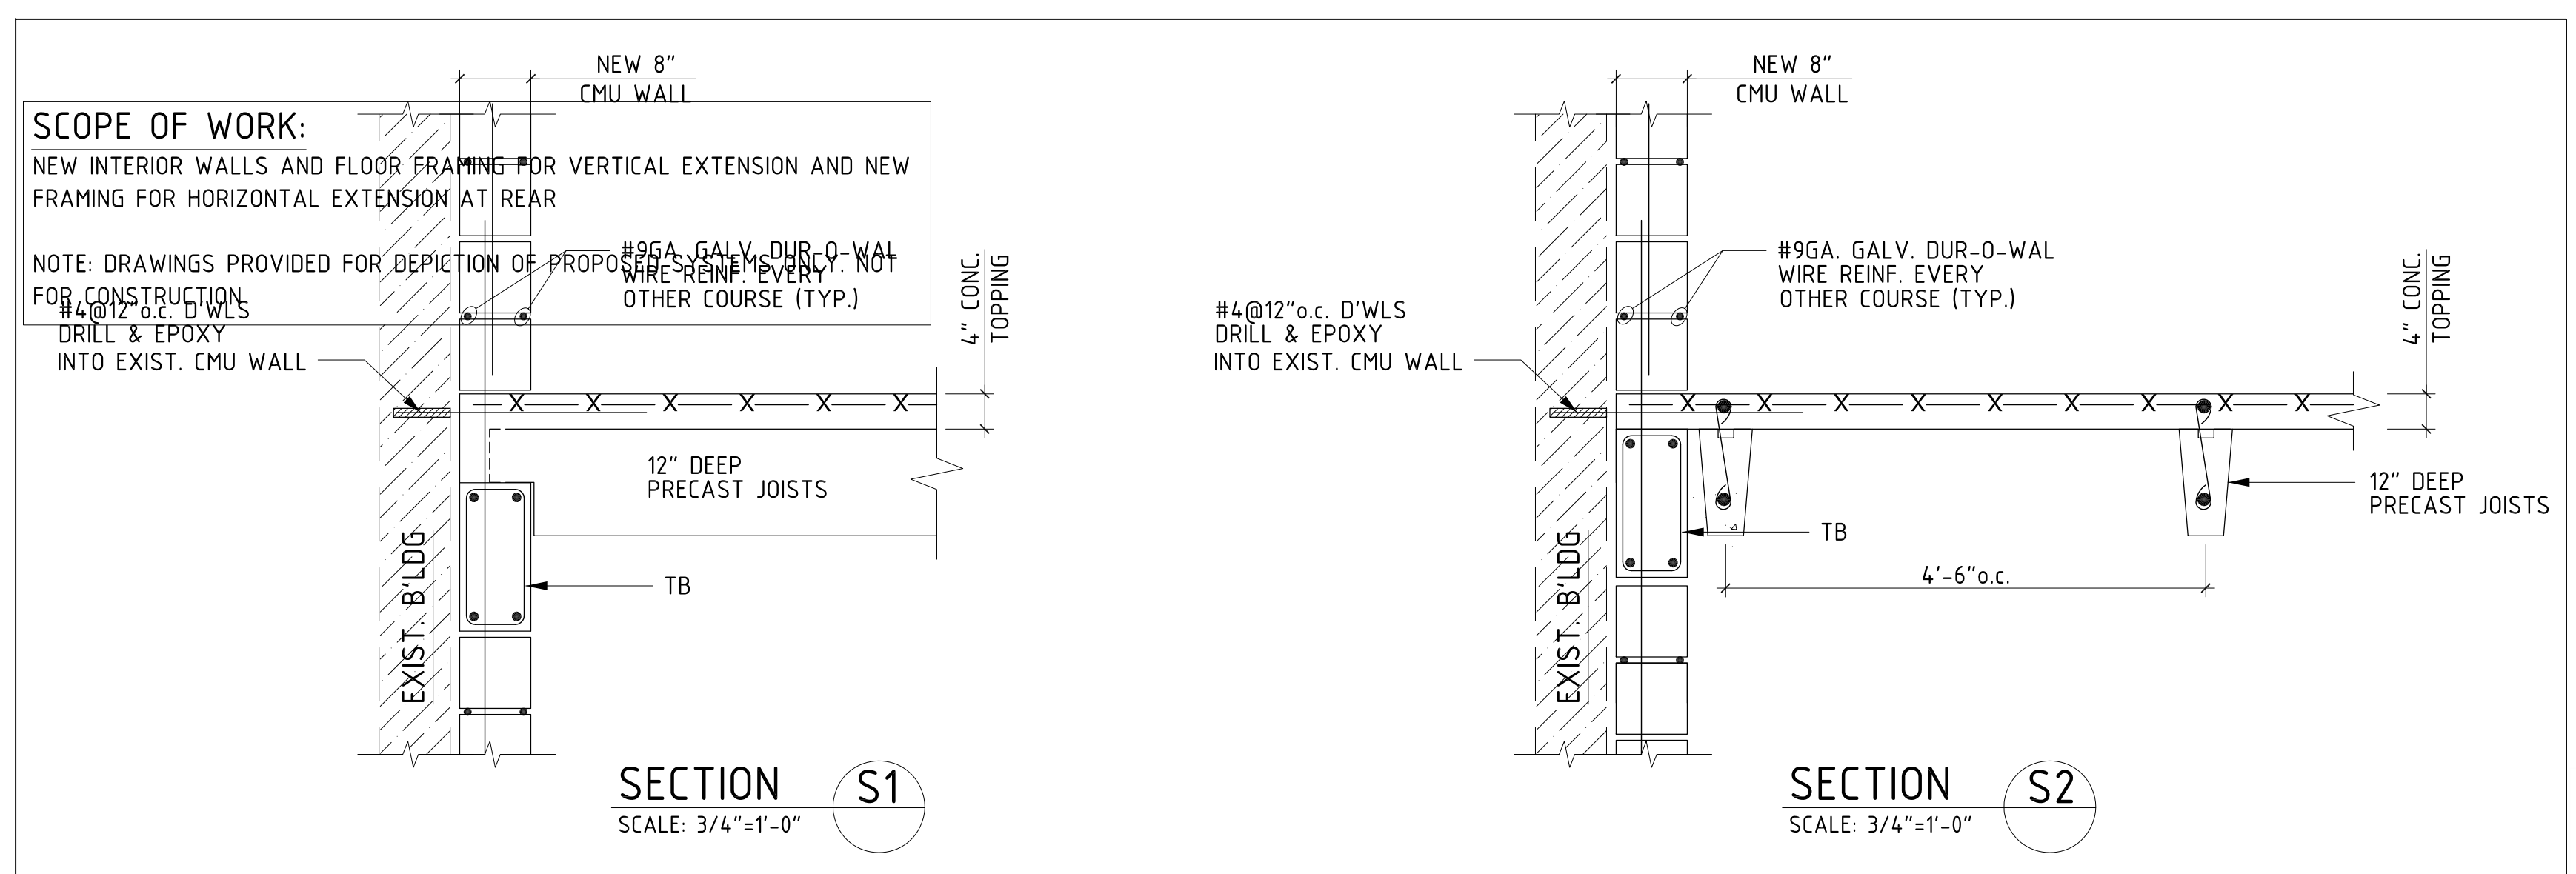

1. ISSUE TO DOB 11/08/2021

Project #M21-12

S-102.00

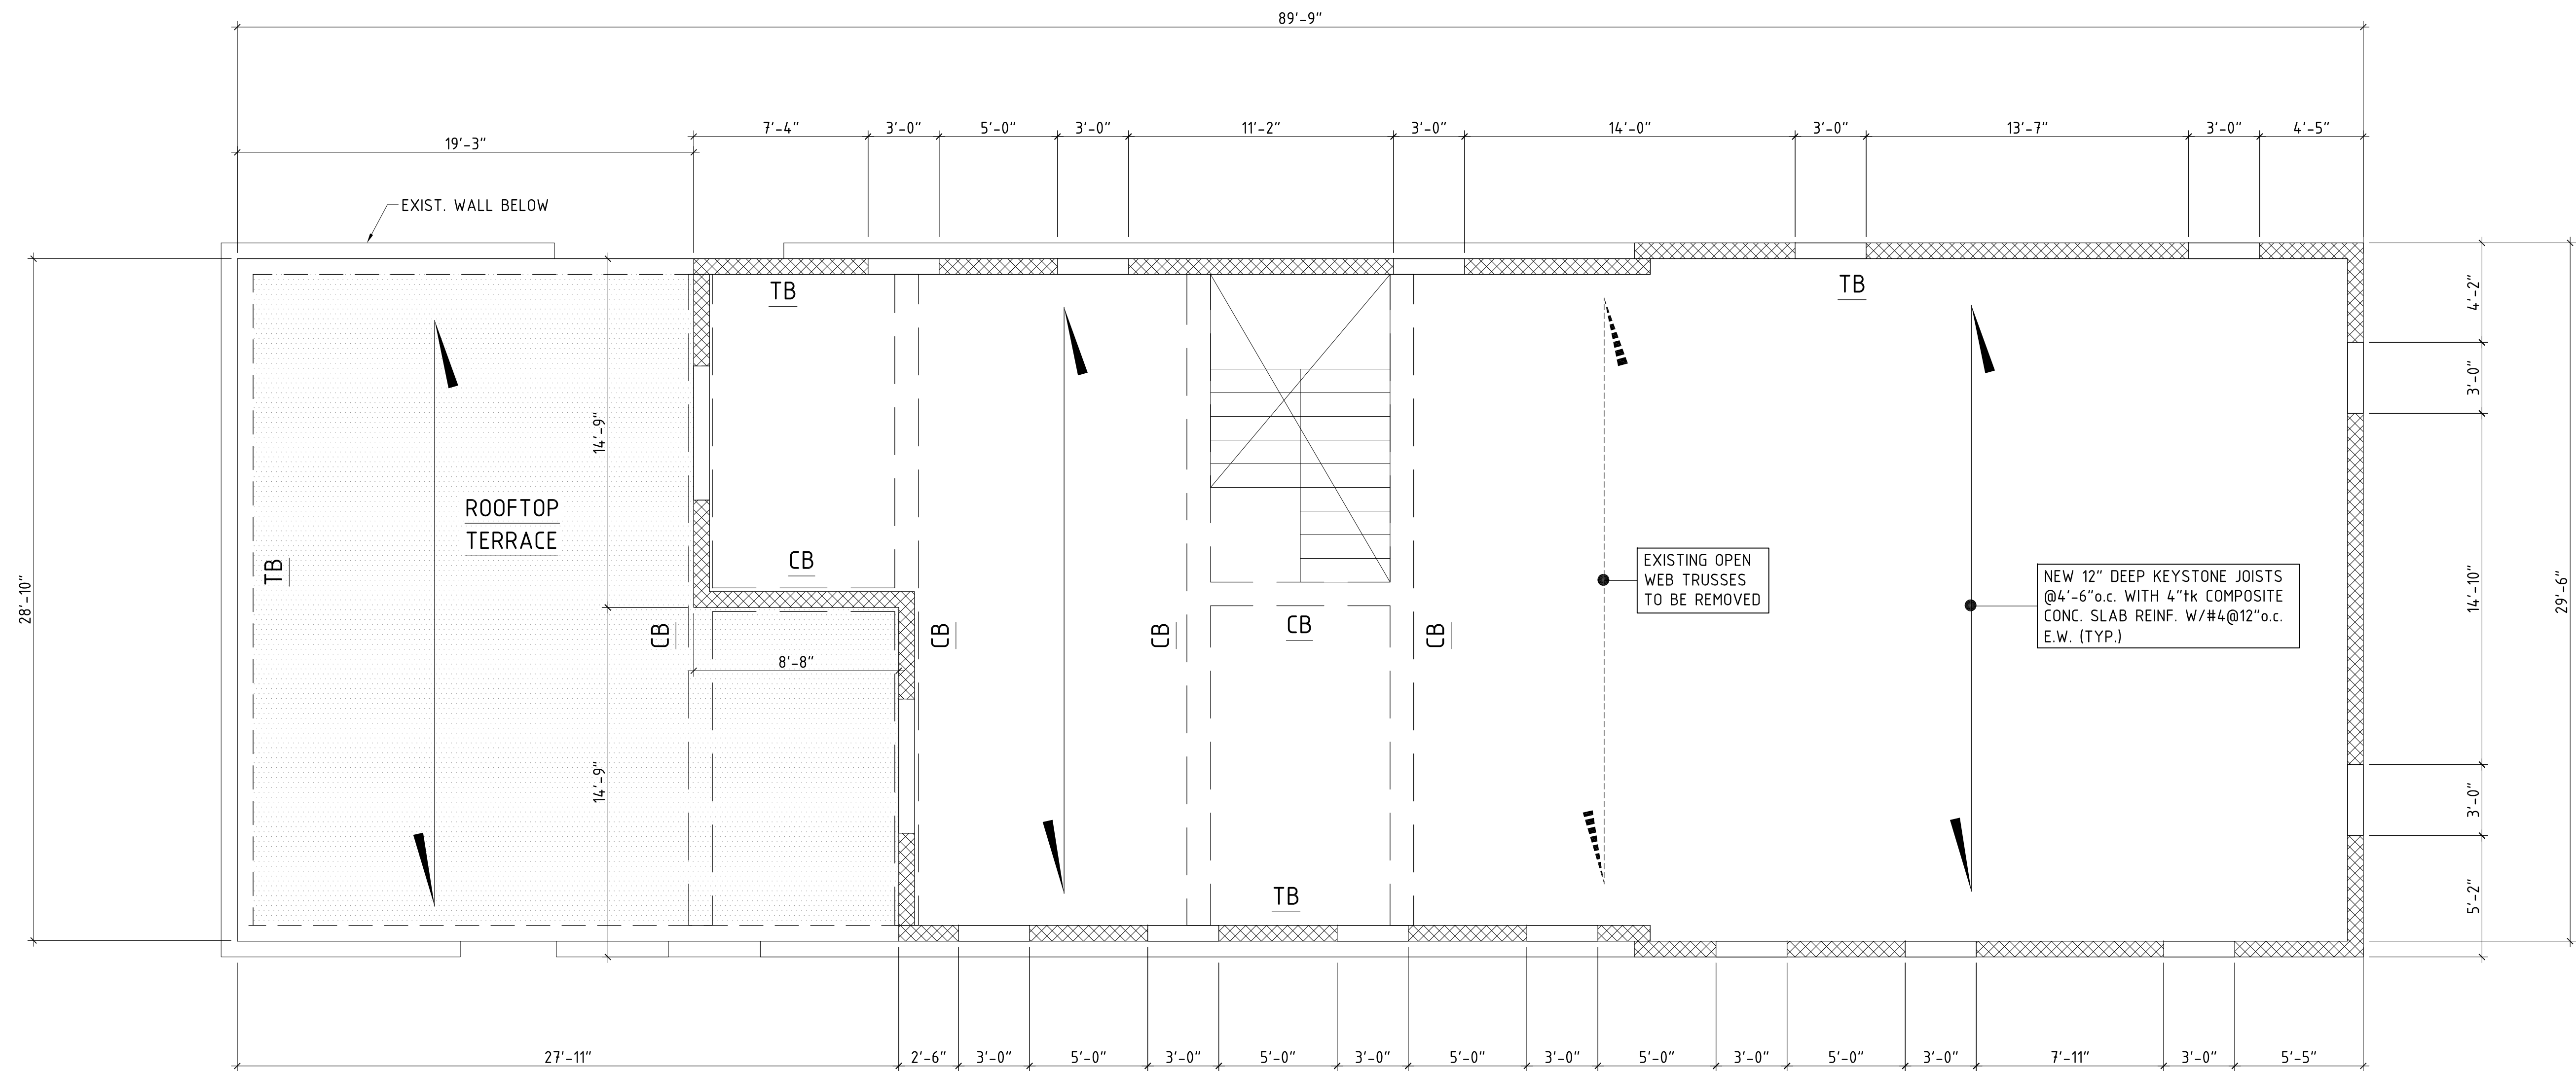

EXISTING ROOF - NEW LEVEL 3 FLOOR FRAMING PLAN

SCALE: 1/4"=1'-0"


STRUCTURAL NOTES:

1. TOP OF CONC. FLOOR SLAB EL. = 26'-0"

SCOPE OF WORK:

NEW FRAMING FOR VERTICAL AND HORIZONTAL EXTENSION

NOTE: DRAWINGS PROVIDED FOR DEPICTION OF PROPOSED SYSTEMS ONLY. NOT FOR CONSTRUCTION



SKLARchitecture
Commercial & Residential Architecture
P : 954 925 9292
www.sklarchitect.com


ADAS DEJ SYNAGOGUE
225 37TH ST. MIAMI BEACH FL. 33139

WEXLER & ASSOCIATES
STRUCTURAL ENGINEERS
900 Biscayne Boulevard | MIAMI, FL 33132
TEL: 305.209.3293 | FAX: 212.268.8960
ENGINEERING CONSULTANT


LEVEL 3
FLOOR FRAMING PLAN

1. ISSUE TO DOB 11/08/2021

Project #M21-12



S-103.00

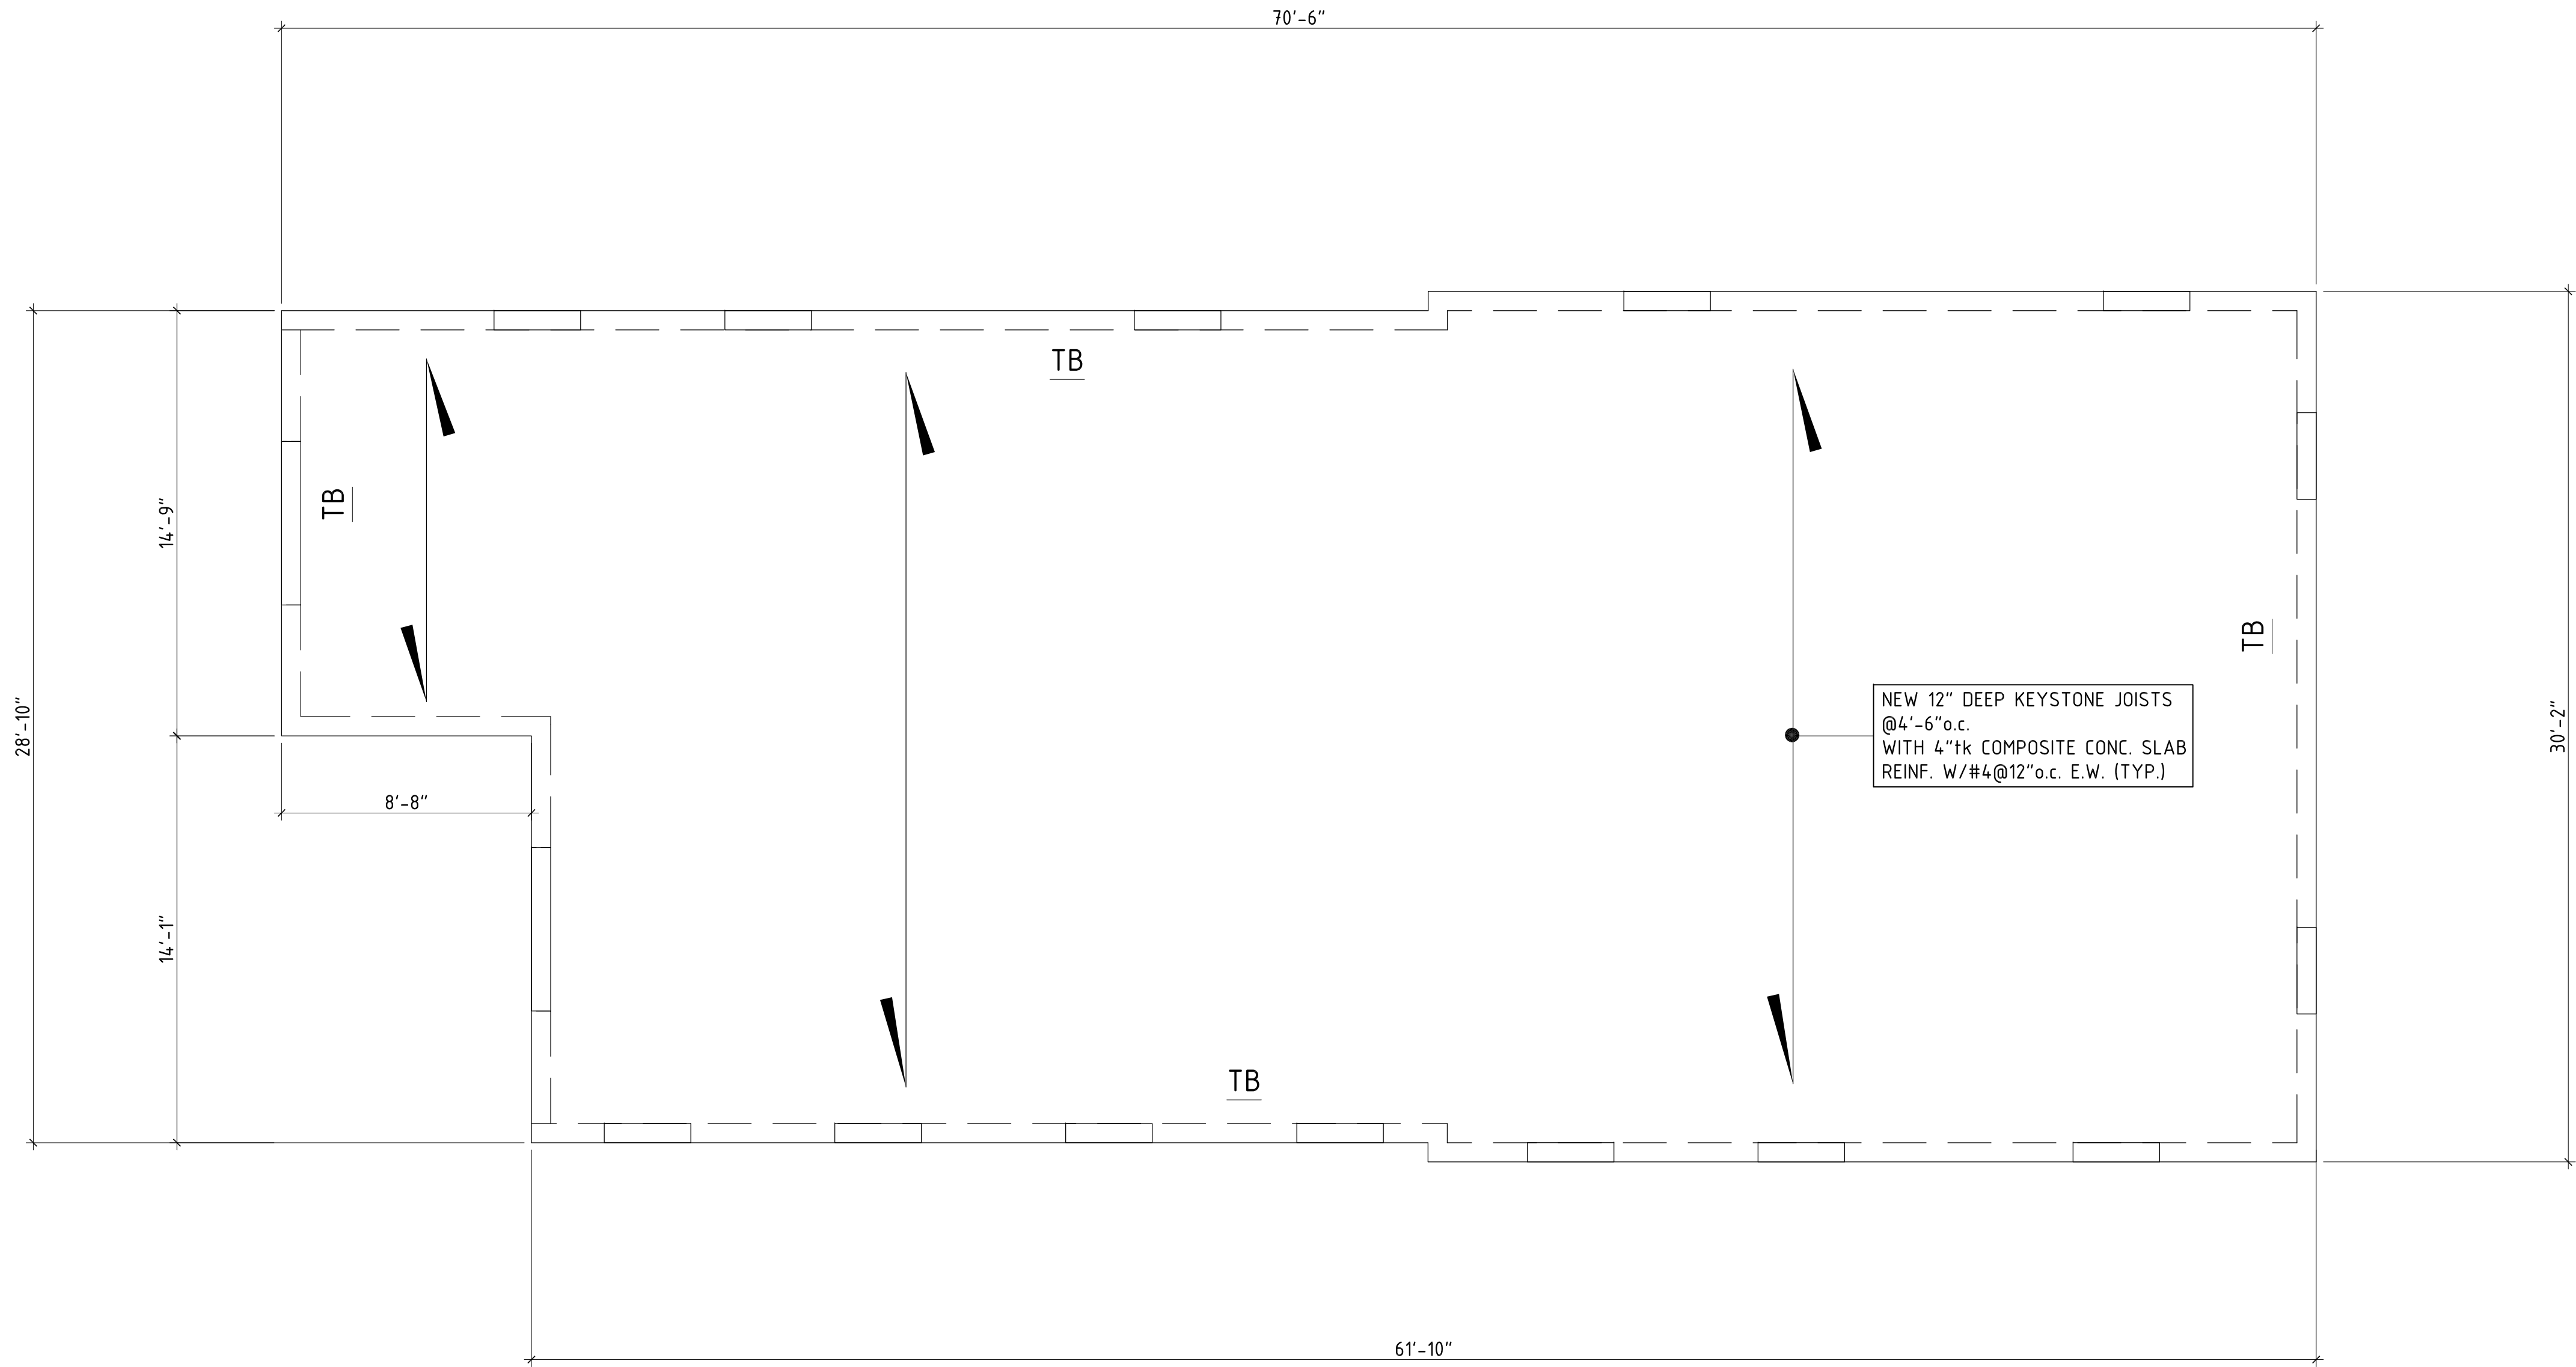

ROOF FRAMING PLAN
SCALE: 1/4"=1'-0"

STRUCTURAL NOTES:
1. TOP OF CONC. FLOOR SLAB EL. = 35'-0"

SCOPE OF WORK:
NEW FRAMING FOR VERTICAL AND HORIZONTAL EXTENSION

NOTE: DRAWINGS PROVIDED FOR DEPICTION OF PROPOSED SYSTEMS ONLY. NOT FOR CONSTRUCTION

