

ADDITION AND ALTERATION TO RESIDENCE FOR MR. AND MRS. ELIAS MITRANI


PETER J. GORDO
R. CHOIEFF
M. SIOUDES

ARCHITECT
DESIGNER
STRUCT. ENG.

NOTE

1. ALL WORK SHALL BE DONE IN ACCORDANCE WITH THE LATEST EDITIONS OF THE BUILDING CODES AND SPECIFICATIONS.
2. THE OWNER SHALL BE RESPONSIBLE FOR OBTAINING ALL NECESSARY PERMITS AND APPROVALS.
3. THE ARCHITECT SHALL BE RESPONSIBLE FOR THE DESIGN AND CONSTRUCTION OF THE WORK.

INDEX OF DRAWINGS	
1	GENERAL NOTES
2	FOUNDATION PLAN
3	FIRST FLOOR PLAN
4	SECOND FLOOR PLAN
5	SECTION A-A
6	SECTION B-B
7	SECTION C-C
8	SECTION D-D
9	SECTION E-E
10	SECTION F-F
11	SECTION G-G
12	SECTION H-H
13	SECTION I-I
14	SECTION J-J
15	SECTION K-K
16	SECTION L-L
17	SECTION M-M
18	SECTION N-N
19	SECTION O-O
20	SECTION P-P
21	SECTION Q-Q
22	SECTION R-R
23	SECTION S-S
24	SECTION T-T
25	SECTION U-U
26	SECTION V-V
27	SECTION W-W
28	SECTION X-X
29	SECTION Y-Y
30	SECTION Z-Z

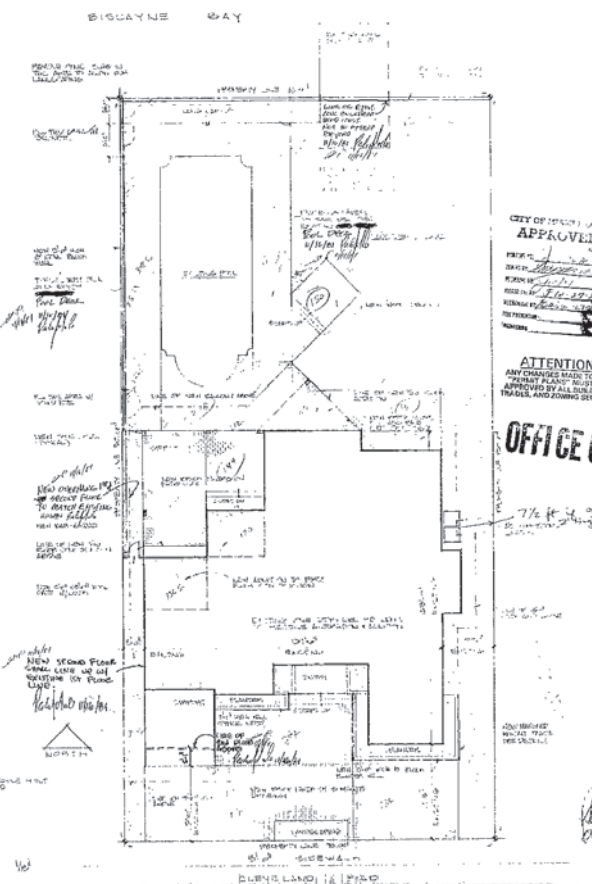

CITY OF HONOLULU
APPROVED

ATTENTION
ANY CHANGES MADE TO THE
ORIGINAL PLAN MUST BE
APPROVED BY ALL AFFECTED
DEPARTMENTS AND AGENCIES.


OFFICE COPY

addition & alterations
to a residence for
MR. & MRS. MITRANI
peter j. gordo · architect
ralph choieff
interior designer

CONTRACT NO. 1184
DATE 11/14/71
SHEET 1 OF 11

A I
of 11

90507

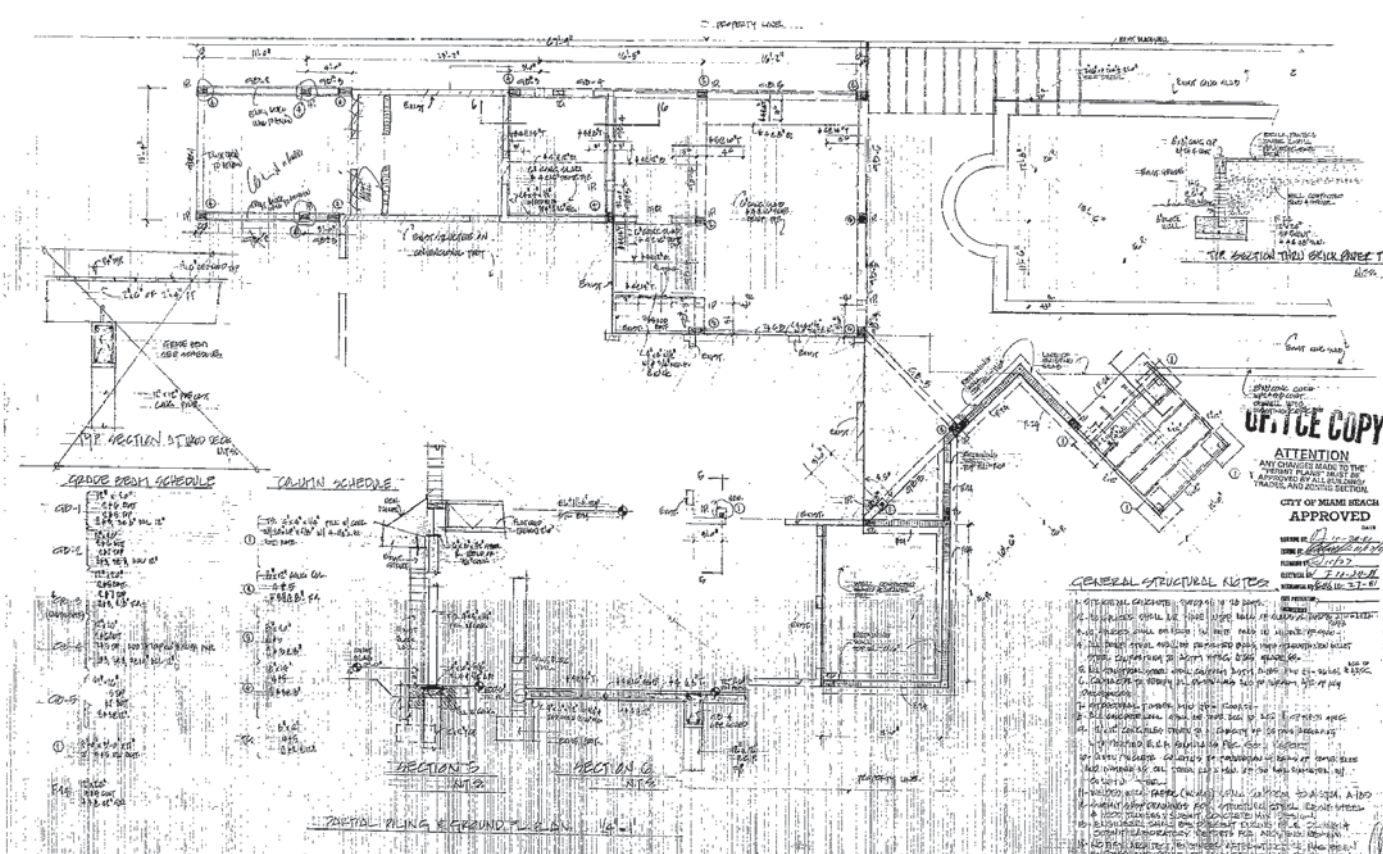

addition & alterations
to a residence for
MR. & MRS. MITRONI
MIAMI BEACH, FLORIDA

UP-TO-DATE COPY
ATTENTION
ANY CHANGES MADE TO THIS
DRAWING MUST BE MADE IN
PENCIL AND INITIALS
CITY OF MIAMI BEACH
APPROVED
SEVEN BY *[Signature]*
DATE 1/17/48
FOR THE ENGINEER
RICHARD E. FINE
REGISTERED PROFESSIONAL ENGINEER
NO. 12345
STATE OF FLORIDA

GENERAL STRUCTURAL NOTES
1. ALL CONCRETE SHALL BE 3000 PSI.
2. ALL REINFORCING SHALL BE #4 OR LARGER UNLESS OTHERWISE NOTED.
3. ALL WALLS SHALL BE 8" THICK UNLESS OTHERWISE NOTED.
4. ALL FLOORS SHALL BE 4" THICK UNLESS OTHERWISE NOTED.
5. ALL ROOFS SHALL BE 4" THICK UNLESS OTHERWISE NOTED.
6. ALL FOUNDATIONS SHALL BE 12" THICK UNLESS OTHERWISE NOTED.
7. ALL EXTERIOR WALLS SHALL BE 8" THICK UNLESS OTHERWISE NOTED.
8. ALL EXTERIOR FLOORS SHALL BE 4" THICK UNLESS OTHERWISE NOTED.
9. ALL EXTERIOR ROOFS SHALL BE 4" THICK UNLESS OTHERWISE NOTED.
10. ALL EXTERIOR WALLS SHALL BE 8" THICK UNLESS OTHERWISE NOTED.

90507