



ALVEY TREE CONSULTING LLC

ALEXIS ALVEY -

ISA BOARD CERTIFIED MASTER ARBORIST®

#NY-5539B

Arborist Report

6881 Indian Creek Drive
Miami Beach

6/14/2021



Arborist Report

6/14/2021

On June 9th 2021, I visited the property located at 6881 Indian Creek Drive at the request of DNB Design Group. I evaluated the trees on the site in anticipation of new construction. For each tree, I confirmed species, location, and size (Height, Spread, DBH); evaluated condition (Poor, Fair, Good); determined disposition (Remove, Remain, Relocate); determined the Tree Protection Zone for trees to remain; provided relevant comments about health and disposition; and took photographs. Street trees are included. This report shall in no shape or form be construed as a tree risk assessment which is beyond the scope of work written in the contractual agreement.

Please feel free to contact me should any questions arise. Thank-you for the opportunity to assist in this manner.



Alexis Alvey
ISA Board Certified Master Arborist® #NY-5539B

Alvey Tree Consulting LLC
516-728-1366
alveytree@gmail.com
alveytree.com


Property Location -
6881 Indian Creek Drive
Miami Beach, FL 33141

Client -
Francilis J. Domond, RA
DNB Design Group
2020 Ponce de Leon Blvd. Suite 1103
Coral Gables, Florida 33134
305.546.7281

Tree Location Diagram

Site or Street Tree

NOT TO SCALE

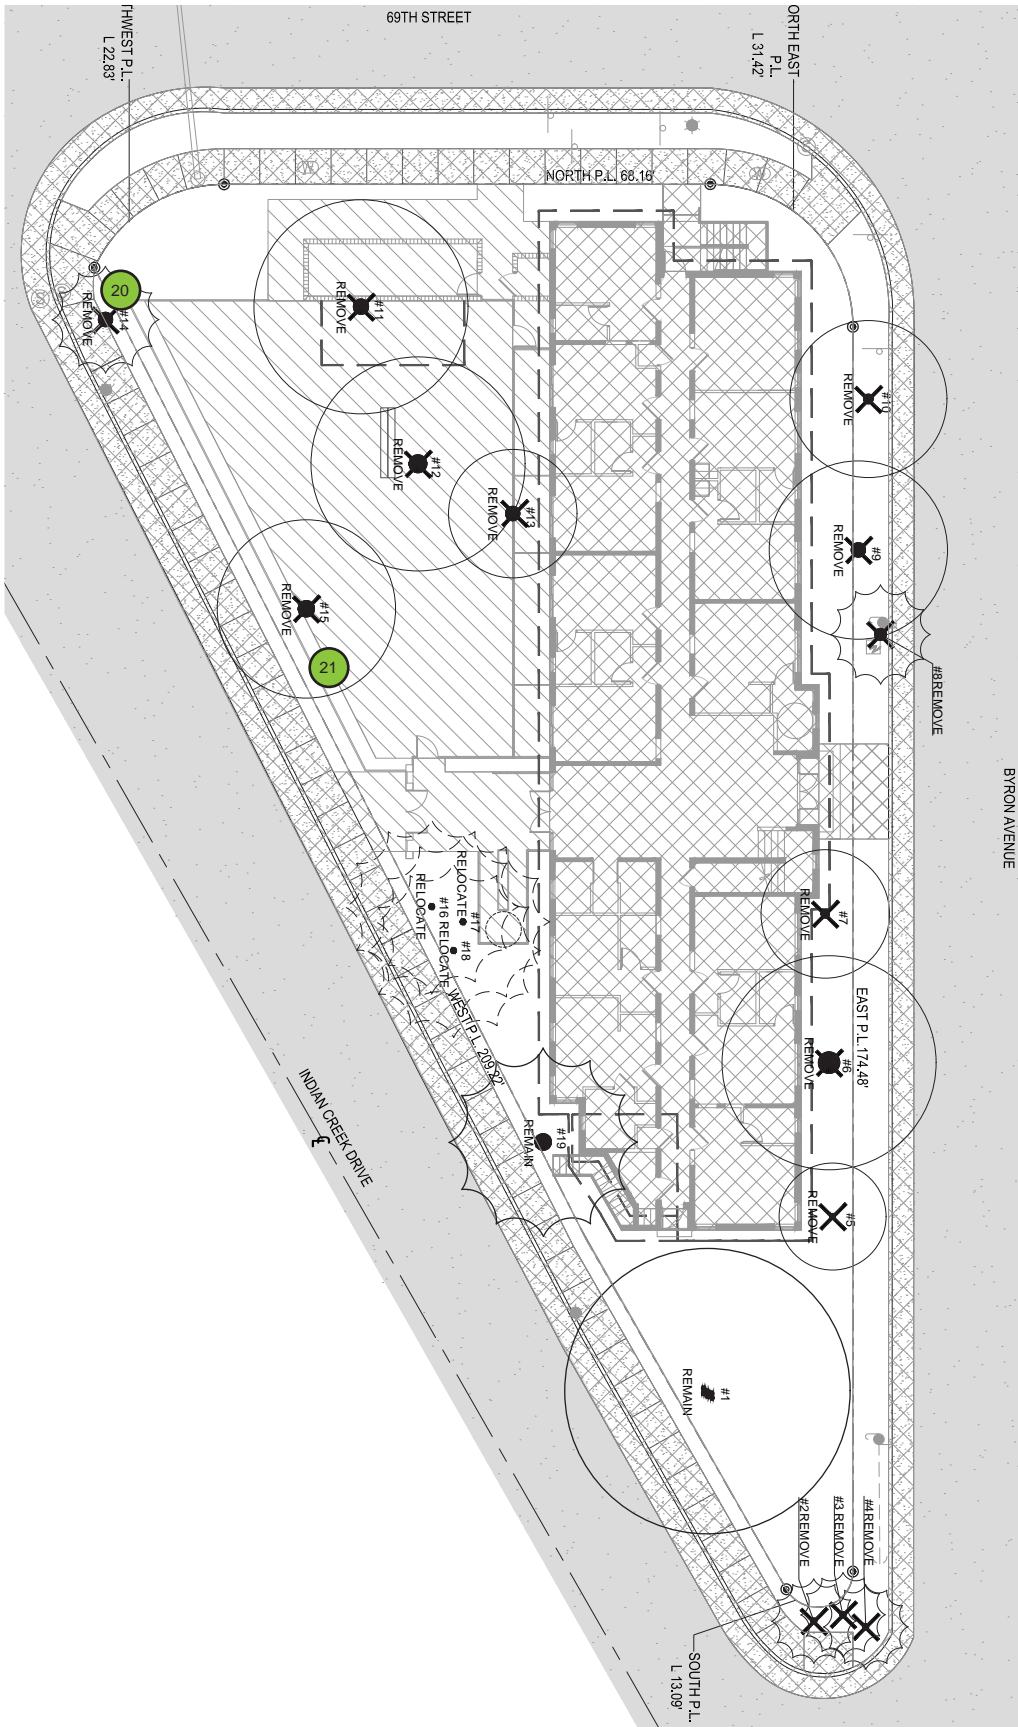

Tree #1

Common Name -
Seagrape

DBH (in) - 67

Height (ft) - 25

Condition -
Fair

Native? -
Yes

Scientific Name -
Coccoloba uvifera

Canopy Spread (ft) - 30

Disposition -
Remain - 15ft radius TPZ



Tree #1 is a Seagrape located on the south side of the property. It is multi-trunked and in fair condition. A number of limbs have been hatracked. The canopy is dense and symmetrical. Prune to remove deadwood and to increase clearance over the street.

This tree is to remain and protective barriers shall be placed 15ft from the tree trunk. Barriers shall be installed prior to the start of construction, and shall remain in place until development is completed and until the department authorizes their removal. Barriers shall be a minimum of 4ft high, and shall be constructed of continuous chain link fence with metal posts at 8ft spacing, or of 2x4 posts with three equally spaced 2x4 rails. Posts may be shifted to avoid roots. No materials shall be placed or disposed of within the TPZ. Natural grade shall be maintained within the TPZ.

Trees #2 - 4

Common Name -
Washingtonia Palms (3)

DBH (in) - 10 each

Height (ft) - 20

Condition -
Fair

Native? -
No

Scientific Name -
Washingtonia robusta

Canopy Spread (ft) - 12

Disposition -
Remove



Trees #2 - 4 are three Washingtonia Palms located at the corner of Indian Creek Drive and Byron Ave. They are in fair condition with yellowing of the ends of the fronds. They are blocking the stop sign.

These trees have not been incorporated into the landscape plan and will therefore be removed.

Tree #5

Common Name -
Bottlebrush

DBH (in) - 12.5

Height (ft) - 18

Condition -
Fair

Native? -
No

Scientific Name -
Callistemon viminalis

Canopy Spread (ft) - 15

Disposition -
Remove



Tree #5 is a Bottlebrush located on the east side of the property. It is in fair condition - it has a curved trunk and an asymmetrical canopy. There are broken limbs and bark is coming off at the base of the trunk. This tree has not been incorporated into the landscape plan and will therefore be removed.

Tree #6

Common Name -
Strangler Fig

DBH (in) - 42

Height (ft) - 40

Condition -
Fair

Native? -
Yes

Scientific Name -
Ficus aurea

Canopy Spread (ft) - 40

Disposition -
Remove



Tree #6 is a Strangler Fig located on the east side of the property. The canopy is dense and spreading. The tree has been pruned away from the building. Overhead wires are nearby. The leaves have been damaged by a chewing insect.

This tree has not been incorporated into the landscape plan and will therefore be removed.

Tree #7

Common Name -
Christmas Palm

DBH (in) - 6
Height (ft) - 20

Condition -
Poor

Native? -
No

Scientific Name -
Adonidia merrillii

Canopy Spread (ft) - 6

Disposition -
Remove



Tree #7 is a Christmas Palm located on the east side of the property. It is in poor condition and is growing through the canopy of Ficus #6. It has a small canopy and a pencil-like trunk. This tree has not been incorporated into the landscape plan and will therefore be removed.

Tree #8

Common Name -
Sabal Palm

DBH (in) - 14
Height (ft) - 23

Condition -
Fair

Native? -
Yes

Scientific Name -
Sabal palmetto

Canopy Spread (ft) - 14

Disposition -
Remove



Tree #8 is a Sabal Palm located on the east side of the property. It is in fair condition with a number of lower brown fronds. This tree has not been incorporated into the landscape plan and will therefore be removed.

Tree #9

Common Name -
Bottlebrush

DBH (in) - 17

Height (ft) - 25

Condition -
Fair

Native? -
No

Scientific Name -
Callistemon viminalis

Canopy Spread (ft) - 25

Disposition -
Remove



Tree #9 is a Bottlebrush located on the east side of the property. It is in fair condition - there are a number of limbs with heading cuts, old flush cuts, and included bark is present. Overhead wires are nearby. This tree has not been incorporated into the landscape plan and will therefore be removed.

Tree #10

Common Name -
Bottlebrush

DBH (in) - 11, 12.5

Height (ft) - 20

Condition -
Fair

Native? -
No

Scientific Name -
Callistemon viminalis

Canopy Spread (ft) - 22

Disposition -
Remove



Tree #10 is a Bottlebrush located on the east side of the property. It is in fair condition - there are a number of limbs with heading cuts and there are flush cuts. The tree is double-trunked with crossing leaders and included bark. This tree has not been incorporated into the landscape plan and will therefore be removed.

Tree #11

Common Name -
Bottlebrush

DBH (in) - 21

Height (ft) - 20

Condition -
Good

Native? -
No

Scientific Name -
Callistemon viminalis

Canopy Spread (ft) - 30

Disposition -
Remove



Tree #11 is a Bottlebrush located on the north side of the property. It is in good condition overall. There are crossing limbs and included bark is present. This tree has not been incorporated into the landscape plan and will therefore be removed.

Tree #12

Common Name -
Bottlebrush

DBH (in) - 22.5

Height (ft) - 25

Condition -
Fair

Native? -
No

Scientific Name -
Callistemon viminalis

Canopy Spread (ft) - 30

Disposition -
Remove



Tree #12 is a Bottlebrush located towards the center of the property. It is in fair condition - there is some branch dieback and the interior of the canopy has been pruned out. This tree has not been incorporated into the landscape plan and will therefore be removed.

Tree #13

Common Name -
Bottlebrush

DBH (in) - 24

Condition -

Native? -

-

No

Scientific Name -
Callistemon viminalis

Height (ft) - 18

Canopy Spread (ft) - 18

Disposition -
Removed

Tree #13 was listed as a Bottlebrush located next to the existing building. This tree has been removed and a stump remains.



Tree #14

Common Name -
Sabal Palm

DBH (in) - 18

Condition -

Native? -

Fair

Yes

Scientific Name -
Sabal palmetto

Height (ft) - 18

Canopy Spread (ft) - 15

Disposition -
Remove



Tree #14 is a Sabal Palm located towards the northwest corner of the property. It is in fair condition. Umbrella Tree #20 is growing around the palm's trunk. This tree has not been incorporated into the landscape plan and will therefore be removed.

Tree #15

Common Name -
Avocado / Strangler Fig

DBH (in) - 11, 25

Height (ft) - 35

Condition -
Poor

Native? -
No / Yes

Scientific Name -
Persea americana / *Ficus aurea*

Canopy Spread (ft) - 25

Disposition -
Remove



Tree #15 is an Avocado located on the western side of the property. It is in poor condition and half dead. A Strangler Fig has grown over the tree and now forms most of the canopy. The DBH includes both trees. This tree has not been incorporated into the landscape plan and will therefore be removed.

Trees #16 - 18

Common Name -
Coconut Palms (3)

DBH (in) - 10 each

Height (ft) - 30

Condition -
Good

Native? -
No

Scientific Name -
Cocos nucifera

Canopy Spread (ft) - 18

Disposition -
Relocate - 9ft radius TPZ



Trees #16 - 18 are three Coconut Palms located on the western side of the property. They are in good condition. These trees are to be relocated and root pruning shall occur a minimum of 4-6 weeks prior to digging the palm and shall be performed or supervised by Certified Arborist. Minimum rootball measurement shall be based upon the most recent *Florida Grades & Standards for Nursery Plants*. Prior to transplanting, the apical bud shall be protected by tying up palm fronds. Leaves shall be untied as soon as the palm is planted. When lifting the palm, a nylon sling with adequate padding shall be used and care shall be taken to not injure or compress the trunk. Plant at grade, with 2" of root initiation zone visible if applicable. Transplanting shall occur as soon as possible and no more than 24 hours after being dug for relocation. The backfill soil shall be irrigated during and following relocation. Wooden braces shall be installed to stabilize the tree. Following relocation, a 9ft radius TPZ shall be erected.

Tree #19

Common Name -
Coconut Palm

DBH (in) - 28

Condition -

Native? -

-

No

Scientific Name -
Cocos nucifera

Height (ft) - 35

Canopy Spread (ft) - 26

Disposition -
Removed

Tree #19 was listed as a Coconut Palm located on the western side of the property. This tree has been removed.



Tree #20

Common Name -
Umbrella Tree

DBH (in) - 14.5

Condition -

Native? -

Fair

Invasive

Scientific Name -
Schefflera actinophylla

Height (ft) - 20

Canopy Spread (ft) - 15

Disposition -
Remove



Tree #20 is an Umbrella Tree located next to Sabal Palm #14. It is in fair condition and is growing over the Sabal Palm.

This species is highly invasive in South Florida and this tree will therefore need to be removed.

Tree #21

Common Name -
Christmas Palms (5)

DBH (in) - 6 each

Height (ft) - 20

Condition -
Fair

Native? -
No

Scientific Name -
Adonidia merrillii

Canopy Spread (ft) - 8

Disposition -
Remove



Tree #21 is a cluster of five Christmas Palms located on the western side of the property. They are in fair condition with some yellowing of the fronds. These trees have not been incorporated into the landscape plan and will therefore be removed.

Notes - TPZ Calculations & Tree and Palm Relocation

Tree Protection Zone (TPZ) -

- For trees and palms that are to remain, protective barriers shall be placed at the dripline or 10ft radius from the trunk, whichever is greater.
- For trees and palms that are relocated, protective barriers shall be placed at the dripline or 1 - 2ft outside the rootball, whichever is greater.

Tree and Palm Relocation Notes -

1. All phases of transplanting trees and palms to be performed or supervised by Certified Arborist.
2. Trees to be relocated shall be root pruned six to eight weeks prior to transplanting. Landscape Contractor shall maintain transplanted material during construction period by watering, moving, spraying, fertilizing, and pruning.
3. Landscape Contractor is responsible for verifying locations of all underground and overhead utilities and easements prior to commencing work. All utility companies and/or the General Contractor shall be notified to verify locations prior to digging. Utility trenching is to be coordinated with the Landscape Contractor prior to beginning of project. The Owner and Certified Arborist shall not be responsible for damage to utility or irrigation lines.
4. The Landscape Contractor shall comply with all local and state codes and shall be responsible for obtaining all applicable permits.
5. The Landscape Contractor shall regularly inspect the relocated material to ensure compliance with standard horticultural practices.
6. The Landscape Contractor is responsible for guaranteeing the transplanted trees and palms for a period of one year. At the time of the final inspection all transplanted trees and palms that are not in viable condition shall be replaced by the Landscape Contractor.
7. The Landscape Contractor shall take all precautions to minimize shock of root pruning and transplanting in accordance with standard arboriculture practices.
8. The diameter of the root ball to be transplanted shall follow the guidelines set forth in the latest edition of the Florida Grades and Standards for Nursery Plants.
9. Roots shall be cleanly cut with a sharp spade, hand saw, chainsaw, or other approved root-pruning equipment.
10. Trees shall not be pruned at transplanting to compensate for root loss. Any pruning required shall be as per the ANSI A300 Standards.
11. For all palms except Sabal palmetto, only dead fronds shall be removed. Sabal palmetto shall have all fronds cut without damaging the bud. Fronds shall be securely tied around the bud prior to relocation and shall be untied after placement in the new planting hole. The bud shall be protected from damage or injury during relocation.
12. After root pruning trees, backfill roots to original existing grade with existing soil free of any deleterious material to root growth.
13. Provide a layer of 3" mulch over backfill area to prevent weed growth, conserve moisture and prevent evaporation. Keep mulch 6" away from the trunk.
14. Provide tree protection as per Landscape Architect's Tree Protection Detail to ensure that the tree or root system is not damaged during the root-pruning period.
15. After root pruning and prior to relocation, tree(s) shall be watered a minimum of twice weekly.
16. Transplanting shall occur within 24 hours after being dug for relocation. The root ball shall be kept moist.
17. Digging and preparation of the new hole for the transplant shall be done prior to removing the tree from the existing location.
18. The depth of the new hole shall be equal to the depth of the root ball and the width shall be equal to two to three times the width of the root ball.
19. Trees and palms shall be lifted from the ground with heavy equipment designed specifically for tree relocation so that the trunk and crown is not impacted and damaged by the equipment.
20. The slings used to lift the trees and large palms shall be non-binding nylon slings that are wrapped under the root ball to support the weight of tree or palm. Slings shall not be solely wrapped around the trunk of the tree. Padding the sling may be necessary so that the trunk is not damaged.

Notes - Tree and Palm Relocation (Contd.)

21. Trees and palms shall be planted so that the top of the rootball is flush with the existing grade. Ensure that deep planting does not occur. The tree and palm shall be centrally positioned in the planting hole and set straight, plumb or normal to the growth pattern prior to transplanting.
22. Transplanted trees and palms shall be backfilled with a uniform mix of 25% fully decomposed compost and 75% existing site soil cleaned free of weeds and rocks.
23. Trees and palms shall be watered to eliminate air pockets in the backfill mix prior to mulching.
24. A 4" soil berm shall be created around the edge of the planting hole to hold water, or as per the Landscape Architect's Planting Details.
25. Install tree and palm bracing as per the Landscape Architect's Planting Details, to ensure stability of trees and palms.
26. After transplanting trees and palms, the Landscape Contractor shall be responsible for watering to maintain soil moisture during the guarantee period. The following schedule is suggested: First month - Daily; Second month - 3 times per week; Third and Fourth month - 2 times per week; Last Eight months - 1 time per week. For trees over 4" in caliper at the time of planting, the suggested schedule is: First 6 weeks - Daily; from 1.5 months to 6 months - 3 times per week, last 6 months - 1 time per week.

Notes - Tree and Palm Protection

1. Fences shall be erected to protect trees and palms to be preserved. Fences define a specific protection zone for each tree or group of trees. Fences shall be installed prior to the beginning of construction and are to remain until all site work has been completed. Fences may not be relocated or removed without the written permission of the Arborist. Refer to the Landscape Architect's Tree Protection Detail.
2. Construction trailers, traffic, and storage areas must remain outside fenced areas at all times.
3. All underground utilities and drain or irrigation lines shall be routed outside the tree protection zone. If lines must traverse the protection area, disturbance shall be minimized by using techniques such as tunneling or boring.
4. No materials, equipment, spoil, or waste or washout water may be deposited, stored, or parked within the tree protection zone.
5. Additional tree pruning required for clearance during construction must be approved by the Certified Arborist and shall be performed by trained arborists, not by construction personnel.
6. If injury should occur to any tree during construction, it should be evaluated as soon as possible by the Landscape Contractor and the Certified Arborist should be notified immediately.
7. Any grading, construction, demolition, or other work that is expected to encounter tree roots must be monitored by the Landscape Contractor.
8. All trees shall be irrigated at least two times a week. Each irrigation session shall wet the soil within the tree protection zone to a depth of 30 inches.
9. Before grading, pad preparation, or excavation for foundations, footings, walls, or trenching near trees the trees shall be root pruned at the edge of the tree protection zone by cutting all roots cleanly to a depth of 36 inches. Roots shall be cut manually by digging a trench and cutting exposed roots with a saw, vibrating knife, rock saw, narrow trencher with sharp blades, or other approved root-pruning equipment.
10. Any roots damaged during grading or construction shall be exposed to sound tissue and cut cleanly with a saw.
11. Spoil from trenches, basements, or other excavations shall not be placed within the tree protection zone, either temporarily or permanently.
12. No burn piles or debris pits shall be placed within the tree protection zone. No ashes, debris, or garbage may be dumped or buried within the tree protection zone.
13. Maintain fire-safe areas around the fences. Also, no heat sources, flames, ignition sources, or smoking is allowed near mulch or trees.
14. Protective barriers shall be placed around each tree, cluster of trees, or the edge of the preservation area at the specified distance. Protective barriers shall be a minimum of four feet above ground level and shall be constructed of wood, plastic, or metal, and shall remain in place until development is completed. Protective barriers shall be in place prior to the start of any construction.
15. Understory plants within protective barriers shall be protected.
16. No excess oil, fill, equipment, building materials or building debris shall be placed within the areas surrounded by protective barriers, nor shall there be disposal of any waste material such as paints, oils, solvents, asphalt, concrete, mortar or any other material harmful to trees or understory plants within the areas surrounded by protective barriers.
17. Trees shall not be braced in such a fashion as to scar, penetrate, perforate or otherwise inflict damage to the tree.
18. Natural grade shall be maintained within protective barriers. In the event that the natural grade of the site is changed as a result of site development such that the safety of the tree may be endangered, tree wells or retaining walls are required.
19. Fences and walls shall be constructed to avoid disturbance to any protected tree. Post holes and trenches located close to trees shall be dug by hand and adjusted as necessary, using techniques such as discontinuous footings, to avoid damage to major roots.

Note: Trees inherently pose a certain degree of hazard and risk from breakage, failure or other causes and conditions. Recommendations that are made are intended to minimize or reduce such hazardous conditions. However, there can be no guarantee or warranty that efforts to discover or correct unsafe conditions will prevent future breakage or failure, nor can there be any guarantee that all hazardous conditions have been detected. The client should not infer that a tree is safe either because services have been recommended or done to reduce risk, or because no services have been recommended or done on a specific tree. The client assumes any and all risks associated with pursuing consultant's advice and fully understands that he or she is engaged in securing professional consultation regarding the above-mentioned property.