
BICYCLE LANE SEPARATOR VENETIAN CAUSEWAY SITE I FROM HERALD PLAZA TO TOLL PLAZA


PROJECT NO. 20210065 SHEET 2 OF 5

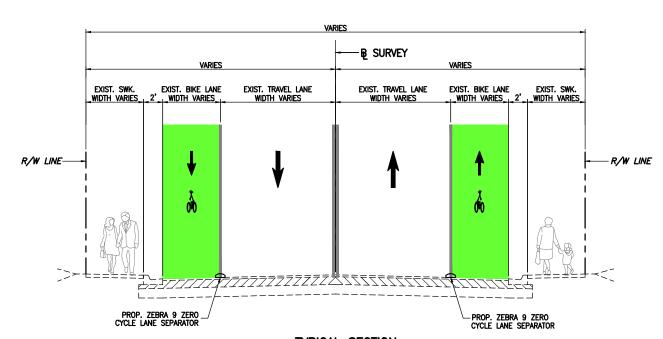

TYPICAL SECTION

VENETIAN CAUSEWAY

HERALD PLAZA TO PURDY AVENUE



DETAIL PORTION OF BRIDGE WITH EXISTING 4 FEET BIKE LANE PROP. 11' TRAVEL LANE FROM STA 116+05 TO STA 128+93

TYPICAL SECTION NOTES:

- PROP. ZEBRA 9 ZERO CYCLE LANE SEPARATOR SHALL BE INSTALLED AS SHOWN ON PLANS, IF ANY IS IN CONFLICT WITH RESIDENTIAL OR COMMERCIAL DRIVEWAY PLEASE CONTACT THE ENGINEER.
- PROP. ZEBRA 9 ZERO CYCLE LANE SEPARATOR SHALL BE INSTALLED CENTERED OVER THE ADVISORY LANE OR DIRECTED BY THE ENGINEER ON THE PLANS.


SUMMARY OF QUANTITIES

PAY ITEM NO.	ITEM	UNIT	TOTAL QUANTITY
102-1A	MAINTENANCE OF TRAFFIC	L.S.	1
705-12-1	ZEBRA 9 ZERO CYCLE LANE SEPARATOR - FURNISH - TO BE DELIVERED TO CONSTRUCTION PROJECT MANAGER	E.A.	42
705-12-3	ZEBRA 9 ZERO CYCLE LANE SEPARATOR - FURNISH AND INSTALL - INCLUDES 10% SPARES FOR MAINTENANCE	E.A.	462
711-11-121	THERMOPLASTIC (WHITE) (SOLID) (6")	L.F.	2,360

PAY ITEM NOTES

102-1A

TO BE ACCOMPLISHED IN ACCORDANCE WITH THE FLORIDA DEPARTMENT OF TRANSPORTATION INDEX 102-600 SERIES, THE MANUAL OF UNIFORM TRAFFIC CONTROL DEVICES FOR STREETS AND HIGHWAYS, U.S. DEPARTMENT OF TRANSPORTATION FEDERAL HIGHWAY ADMINISTRATION (ANSI D6 1-1978), PUBLIC WORKS MANUAL OF METROPOLITAN DADE COUNTY, AND THE LATEST REVISIONS OF THE AFORE MENTIONED MANUALS. INCLUDES THE COST OF FURNISHING, INSTALLING, MAINTAINING, AND REMOVING ALL ITEMS OF MAINTENANCE OF TRAFFIC NOT PAID FOR UNDER SEPARATE ITEMS INCLUDING BUT NOT LIMITED TO SIGNS, BARRICADES, FLASHING LIGHTS, TEMPORARY PAVEMENT, TEMPORARY PAVEMENT MARKINGS, TRAFFIC SIGNAL MODIFICATION FOR TRAFFIC CONTROL, ETC.

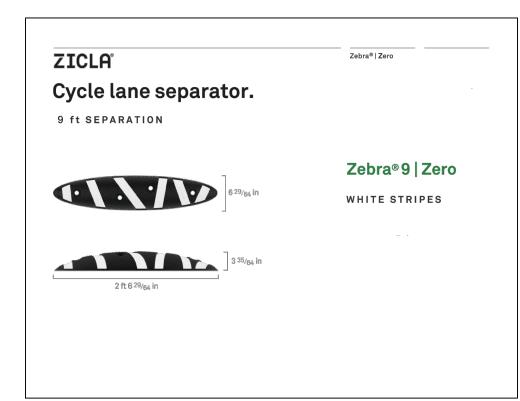

R E V I S I O N S

DATE BY DESCRIPTION DATE BY DESCRIPTION

LEANDRO J. ORA, P.E. CIVIL ENGINEER FL. ENG. REG. NO. 25588



	NAME	DATE		NAME	DATE	
NED Y	J.M.		DRAWN BY	J.M.		MIAMI-DADE
KED Y			CHECKED BY			COUNTY

TYPICAL SECTION, DETAIL AND SUMMARY OF QUANTITIES