

## ATTACHMENT “B”

### Chapter 114 – GENERAL PROVISIONS

#### Sec. 114-1. - Definitions.

The following words, terms and phrases when used in this subpart B, shall have the meanings ascribed to them in this section, except where the context clearly indicates a different meaning:

\* \* \*



*Floor area* means the sum of the gross horizontal areas of the floors of a building or buildings, measured from the exterior faces of exterior walls or from the exterior face of an architectural projection, from the centerline of walls separating two attached buildings. However, the floor area of a building shall not include the following unless otherwise provided for in these land development regulations.

- (1) Accessory water tanks or cooling towers.
- (2) Uncovered steps.
- (3) Attic space, whether or not a floor actually has been laid, providing structural headroom of less than seven feet six inches.
- (4) Terraces, breezeways, or open porches.
- (5) Floor space used for required accessory off-street parking spaces. However, up to a maximum of two spaces per residential unit may be provided without being included in the calculation of the floor area ratio.
- (6) Commercial parking garages and noncommercial parking garages when such structures are the main use on a site.
- (7) Mechanical equipment rooms located above main roof deck.
- (8) Exterior unenclosed private balconies.
- (9) Floor area located below grade when the top of the slab of the ceiling is located at or below grade. However, if any portion of the top of the slab of the ceiling is above grade, the floor area that is below grade shall be included in the floor area ratio calculation. Despite the foregoing, for existing contributing structures that are located within a local historic district, national register historic district, or local historic site, when the top of the slab of an existing ceiling of a partial basement is located above grade, one-half of the floor area of the corresponding floor that is located below grade shall be included in the floor area ratio calculation.
- (10) Enclosed garbage rooms, enclosed within the building on the ground floor level.
- (11) Stairwells and elevators located above the main roof deck.
- (12) Transformer vault rooms
- (13) Fire control rooms and related command centers for life-safety purposes.
- (14) Bicycle parking (secured).

Volumetric buildings, used for storage, where there are no interior floors, the floor area shall be calculated as if there was a floor for every eight feet of height.

When transfer of development rights are involved, see chapter 118, article V for additional regulations that address floor area.

*Floor area ratio* means the floor area of the building or buildings on any lot divided by the area of the lot.

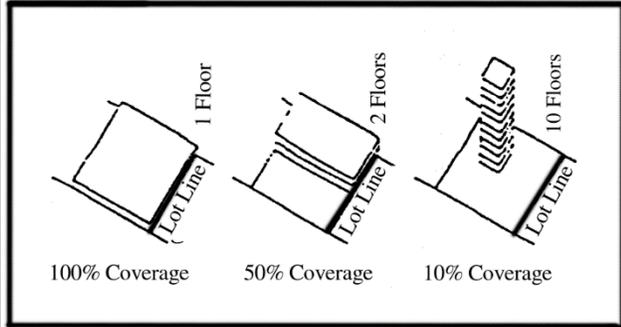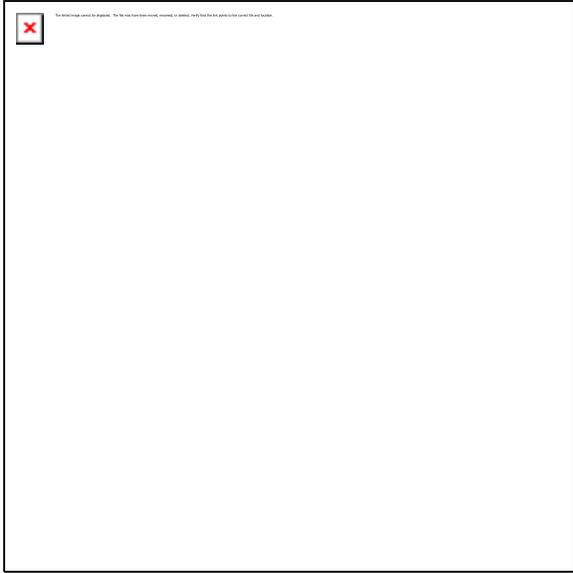

Each example illustrated above has a floor area ratio of 1.0.

\*

\*

\*