

ELECTRONIC BARRIER GATE

MICHELANGELO

RANGE

Road barriers
MICHELANGELO 60/80 120 V
 P940068 00001 - MICHELANGELO 60 (GRAY)
 Booms up to 20 Feet.
 P940069 00001 - MICHELANGELO 80 (GRAY)
 Booms up to 26 Feet.

Smart technology:


- Electronic adjustment of the limit switches.
- The new position of the control panel makes it possible to operate in a vertical position.
- Built-in radio receiver.

Safe Use:

- The barrier features a very stout structure to guarantee greater protection from vandal attacks and constant reliability in use

Simpler installation:

- The blinker and the support for the photocells are integrated in the frame (optional), the lights are integrated in the boom (optional).




TECHNICAL FEATURES

	MICHELANGELO 60	MICHELANGELO 80
Control panels	LIBRA C MV (incorporated)	LIBRA C MV (incorporated)
Reversible/irreversible operator	irreversible	irreversible
Power supply	120 V 60 Hz single-phase	120 V 60 Hz single-phase
Absorbed power	0.4 hp (300W)	0.4 hp (300W)
Opening or closing time	6 s (19.6')	8 s (26.2')
Impact reaction	electronic torque limiter integrated in the control panel	electronic torque limiter integrated in the control panel
Type of limit switches	electronic opening/closing	electronic opening/closing
Manual release	fast key release	fast key release
Operating cycle	continuous use	continuous use
Environmental conditions	from 5°F to + 140°F	from 5°F to + 140°F
Degree of protection	IP24	IP24
Operator weight without boom	680 N (150lb)	680 N (150lb)
Fuse values libra CMB	1A T	1A T



www.BFTGateOpeners.com | (800) 878-7829

MICHELANGELO

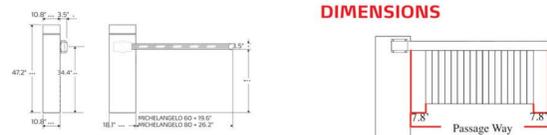

DIMENSIONS

ACCESSORIES

P111376 - SCS 1 Serial connection board for QSC D MA, LIBRA C MA, LIBRA C MV, LIBRA C LX, VENERE D, LEO D MA, LEO MV, RIGEL S and ALTAIR P.	P111408 - SCS WIE Circuit board for direct connection of integral accessories (such as SELECTO, COMPASS SUR) and to the control units QSC D MA, LIBRA C MA, LIBRA C MV, LIBRA C LX, RIGEL S and ALTAIR P.	N728026 - AT 704 First part telescopic round boom, ø 50, 14' (4.3 m) long.
N728027 - AT 504 Second part telescopic round boom, ø 50, 15' (4.6 m) long.	N728028 - AT 502 Second part telescopic round boom, ø 50, 15' (4.6 m) long.	999607 OMEGA AT 70 Accessories packaging for AT 704 / 706 boom.
N728022 - AQ6 Rectangular boom 20' (6 m) long.	999606 - OMEGA AQ6 Accessories packaging for 6m boom.	P120028 00004 PCA N6 Upper and lower casing profile in red rubber for MICHELANGELO booms 6m max.
P120028 00005 PCA N8 Upper and lower casing profile in red rubber for MICHELANGELO booms 8m max.	P120006 - MCL LAMPO KIT Integrated blinker. It must be connected to KIT SCHEDA MCL.	P120005 00001 - MCL LIGHT KIT Lighting kit with 6 lights. To be used in combination with PCA S, PCA 8 or KIT MCL LAMPO. It must be connected to KIT SCHEDA MCL.
P120009 - SCHEDA MCL KIT Lights control board. One board is sufficient to have both KIT MCL LIGHT and LAMPO working.	D730964 - BM MICHELANGELO Anchor base for both 60/80.	D120023 FAF2 MCL FAF Fixed bar rest fork. Bolts to ground.
D940008 - MDOVI GA Movable boom rest rod.	I105110 - LIBRA CMV 60 Replacement board for Michelangelo 60.	I105123 - LIBRA CMV 80 Replacement board for Michelangelo 80.
D573003 - SB Fence previously mounted on boom. Cannot be applied to BGV/MDOVI 30 models. Its application in the other models gives rise to a reduction of the overall length of the boom (see table).	P125011 - BAKKIT2 Battery back-up for Michelangelo.	




www.BFTGateOpeners.com | (800) 878-7829

PARKING DETAILS

PARKING NOTE


CONTRACTOR TO PROVIDE A FINISHED MOCK-UP SAMPLE OF A TYPICAL AND HANDICAP PARKING SPACE STRIPING, BUMPER FOR APPROVAL BY ARCHITECT AND OWNER BEFORE BEGINNING WORK. ALL PAINT TO COMPLY WITH D.O.T. REQUIREMENTS.

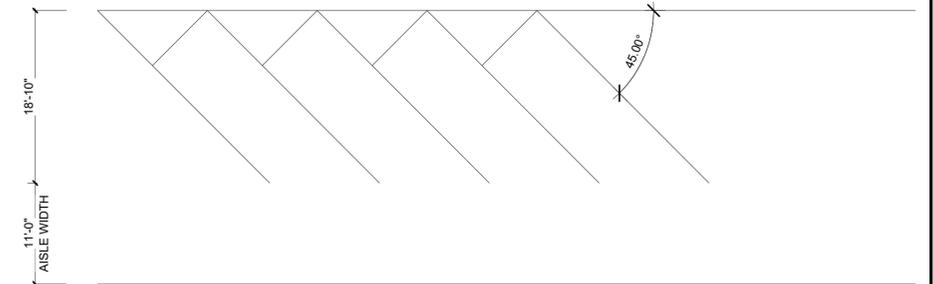


INTERIOR AISLE DIMENSION FOR A 45 DEGREE PARKING

AS PER SEC. 130-63. INTERIOR AISLES
 Miami Beach, Florida - Code of Ordinances Subpart B - LAND DEVELOPMENT REGULATIONS
 Chapter 130 - OFF-STREET PARKING


1 INTERIOR AISLE
 1" = 10'-0"

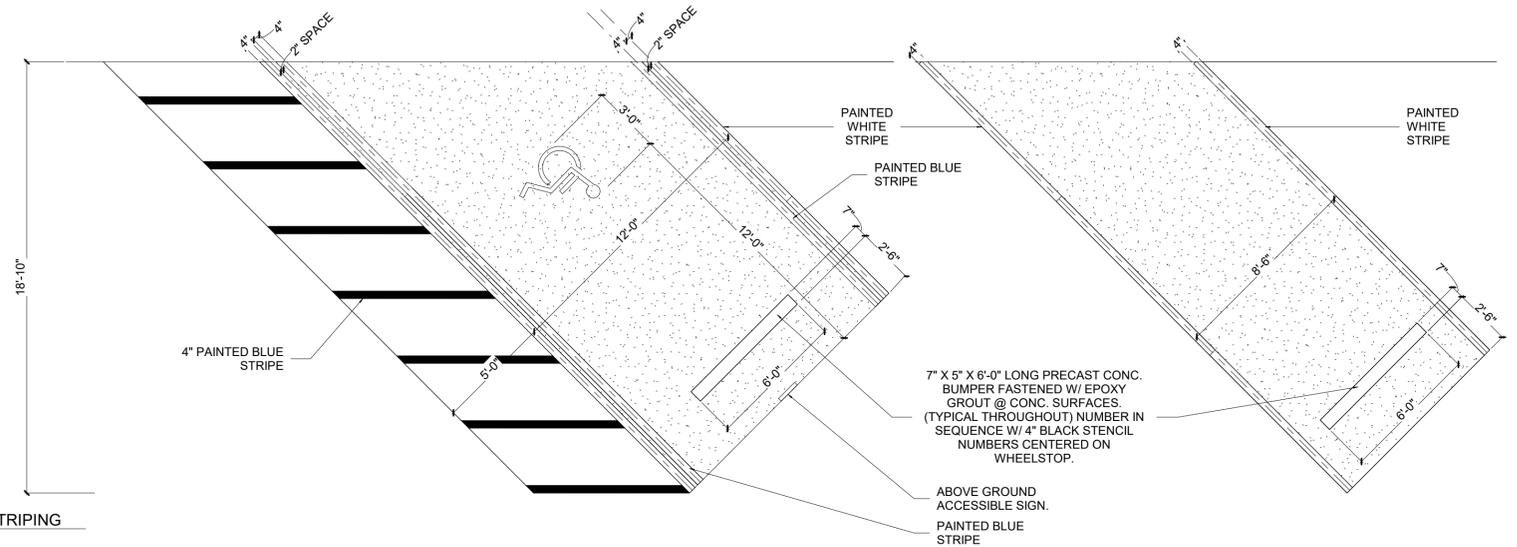


2 TYPICAL PARKING STRIPING
 1/4" = 1'-0"

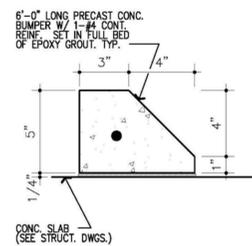


3 - TYP. WHEELSTOP @ SLAB
 NTS



4 - TYP. TRAFFIC ARROW
 NTS

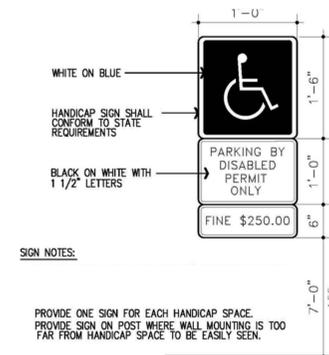

5 - TYP. HANDICAP SIGN
 NTS

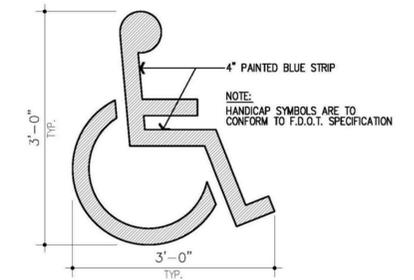

5 - TYP. HANDICAP SYMBOL
 NTS

NOT FOR CONSTRUCTION TEXT