


To be setup in accordance with Standard Index 612

Table 1 Device Spacing				
Speed (mph)	Max. Distance Between Devices (ft.)			
	Cones or Tubular Markers		Type I or Type II Barricades or Vertical Panels or Drums	
	Taper	Tangent	Taper	Tangent
25	25	50	25	50
30 to 45	25	50	30	50

DISTANCE BETWEEN SIGNS			
Speed	Spacing (ft.)		
	A	B	C
40 mph or less	200	200	200
45 mph	350	350	350

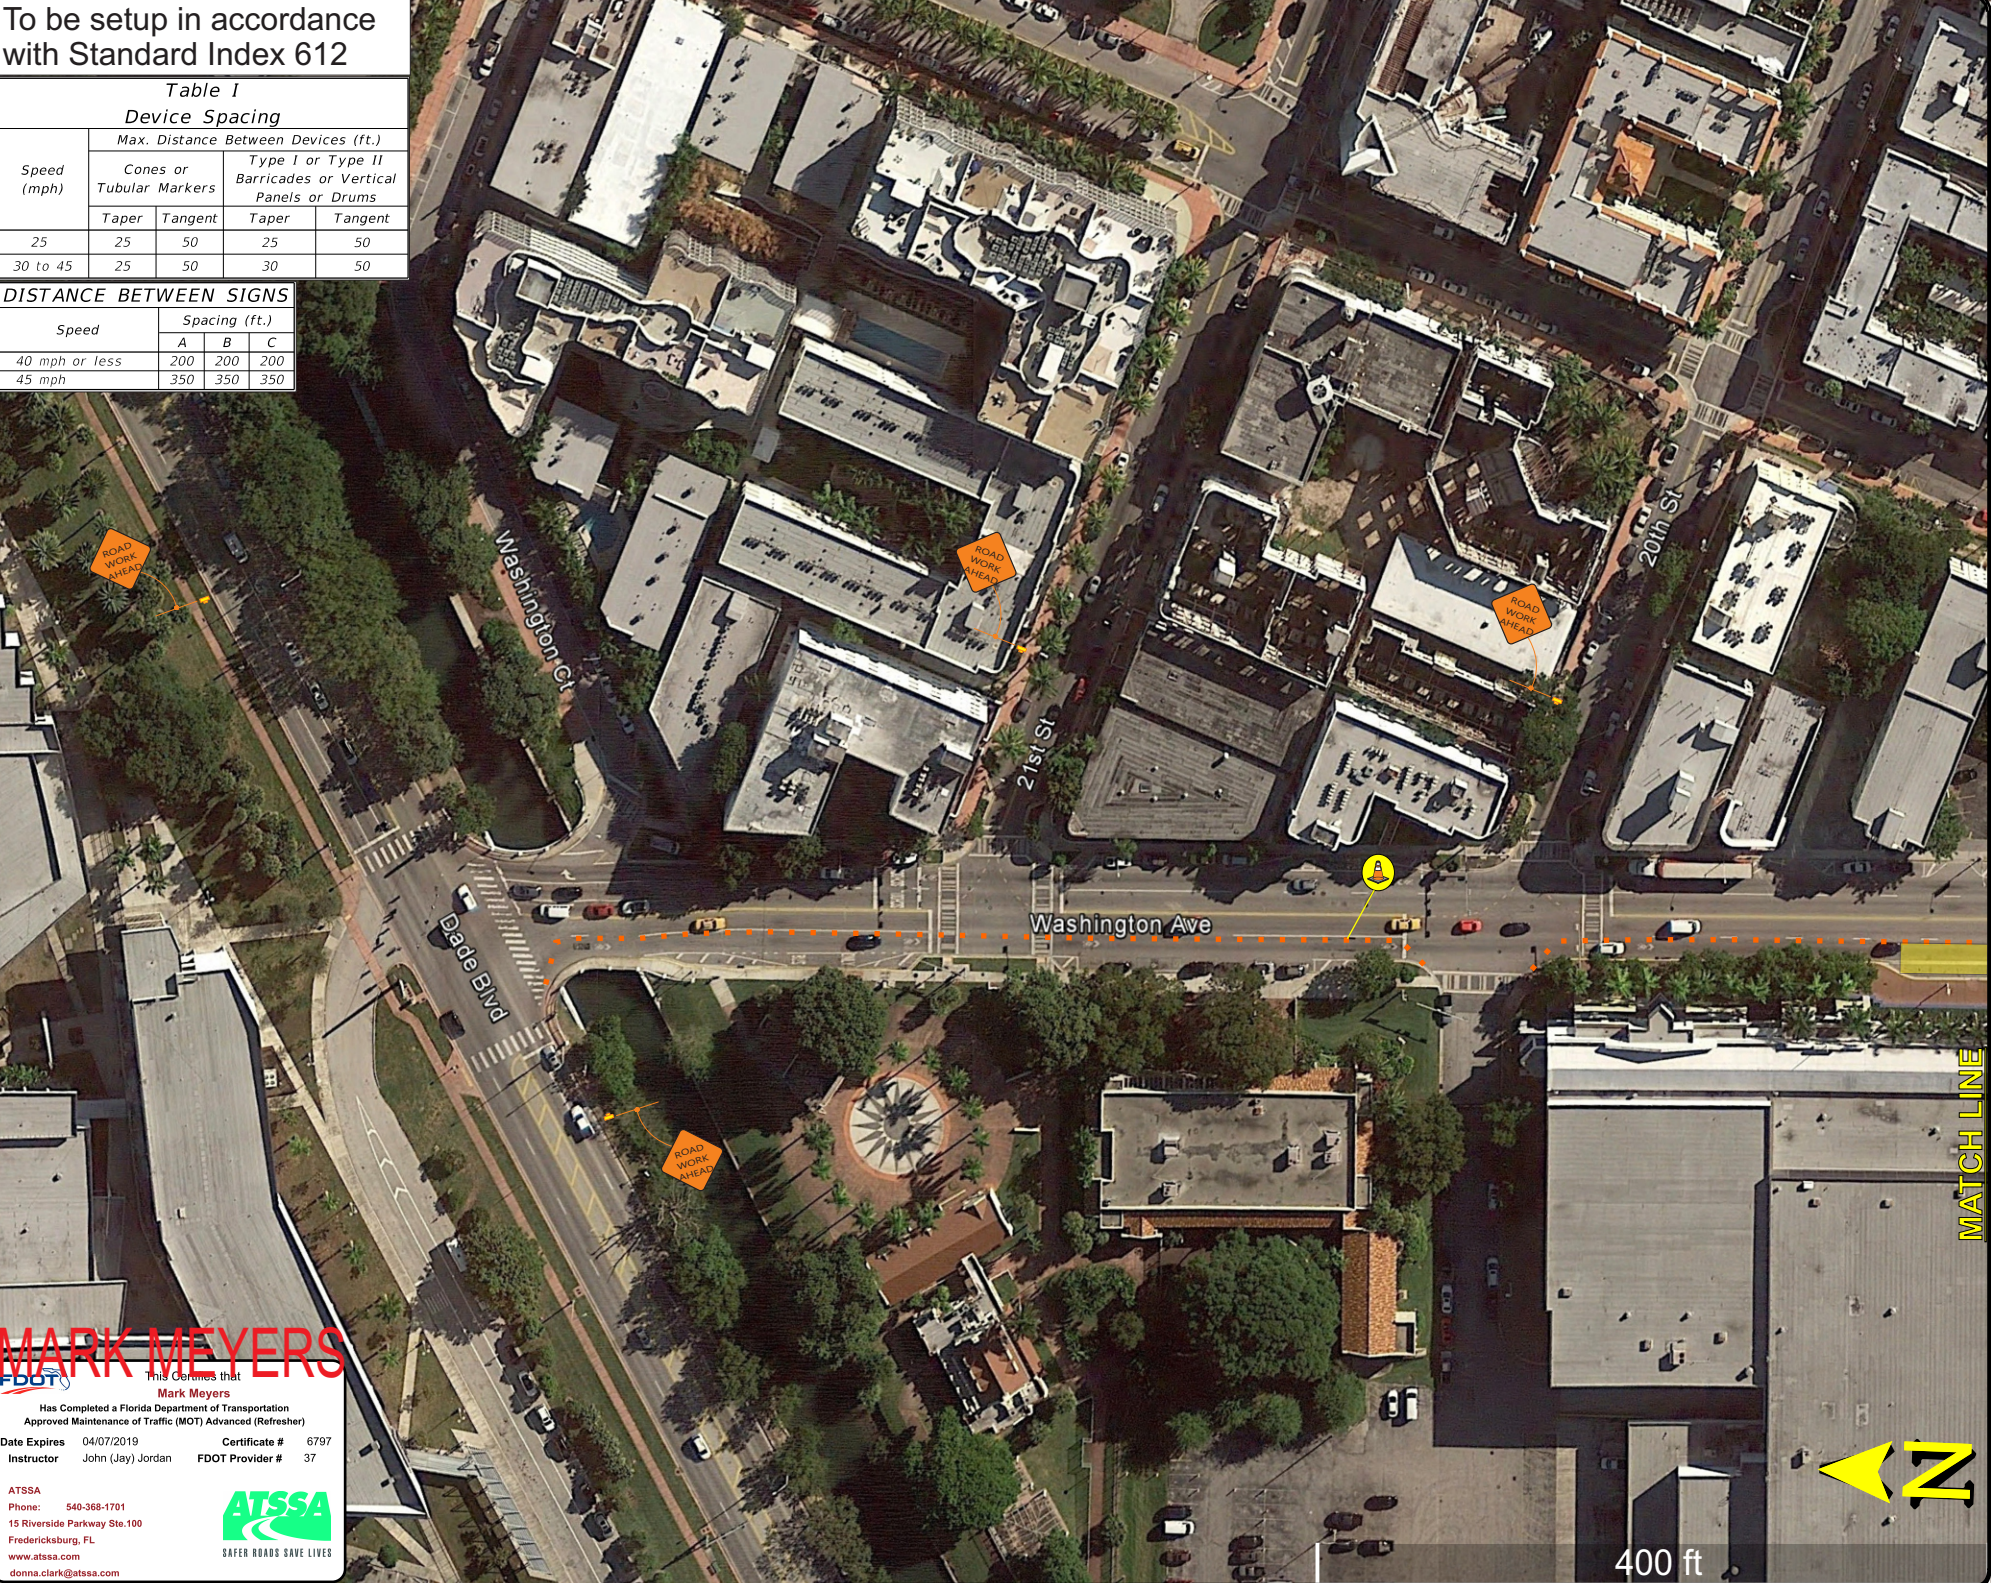

MARK MEYERS

FDOT

This Certifies that

Mark Meyers

Has Completed a Florida Department of Transportation
Approved Maintenance of Traffic (MOT) Advanced (Refresher)

Date Expires 04/07/2019

Instructor John (Jay) Jordan

Certificate # 6797

FDOT Provider # 37

ATSSA

Phone: 540-368-1701

15 Riverside Parkway Ste.100

Fredericksburg, FL

www.atssa.com

doma.clark@atssa.com

ATSSA

SAFER ROADS SAVE LIVES

To be setup in accordance with Standard Index 612

Table 1
Device Spacing

Speed (mph)	Max. Distance Between Devices (ft.)			
	Cones or Tubular Markers		Type I or Type II Barricades or Vertical Panels or Drums	
	Taper	Tangent	Taper	Tangent
25	25	50	25	50
30 to 45	25	50	30	50

DISTANCE BETWEEN SIGNS

Speed	Spacing (ft.)		
	A	B	C
40 mph or less	200	200	200
45 mph	350	350	350

MATCH LINE

MARK MEYERS
FDOT

This Certifies that
Mark Meyers
Has Completed a Florida Department of Transportation
Approved Maintenance of Traffic (MOT) Advanced (Refresher)
Date Expires 04/07/2019 Certificate # 6797
Instructor John (Jay) Jordan FDOT Provider # 37

ATSSA
Phone: 540-368-1701
15 Riverside Parkway Ste. 100
Fredericksburg, FL
www.atssa.com
donna.clark@atssa.com
ATSSA
SAFER ROADS SAVE LIVES

