



ALVEY TREE CONSULTING LLC

ALEXIS ALVEY -

ISA BOARD CERTIFIED MASTER ARBORIST®

#NY-5539B

# Arborist Report

92 La Gorce Circle  
Miami Beach

4/16/2021



# Arborist Report

4/16/2021

On April 13th 2021, I visited the property located at 92 La Gorce Circle at the request of CLAD Landscape Architecture & Design. I evaluated the trees on the site in anticipation of new construction. For each tree, I identified species, location, and size (Height, Spread, DBH); evaluated condition (Poor, Fair, Good); determined disposition (Remove, Remain, Relocate); determined the Tree Protection Zone for trees to remain or be relocated; provided relevant comments about health and disposition; and took photographs. Street trees are included. This report shall in no shape or form be construed as a tree risk assessment which is beyond the scope of work written in the contractual agreement.

Please feel free to contact me should any questions arise. Thank-you for the opportunity to assist in this manner.



Alexis Alvey  
ISA Board Certified Master Arborist® #NY-5539B

Alvey Tree Consulting LLC  
516-728-1366  
alveytree@gmail.com  
alveytree.com

## **Property Location -**

92 La Gorce Circle  
Miami Beach, FL 33141

## **Client -**

CLAD Landscape Architecture & Design  
7665 NE 4th Court  
Miami, FL 33138  
(786) 536-6076 / carolina.monteiro@clad-landscape.com

## Tree #1

**Common Name -**  
Date Palm

**DBH (in) -** 14.5

**Condition -**

**Native? -**

Fair

No

**Scientific Name -**  
*Phoenix dactylifera*

**Canopy Spread (ft) -** 18

**Disposition -**

Remove



Tree #1 is a Date Palm street tree located along La Gorce Circle. It is in fair condition with some small cavities with decay on the trunk such as the one circled in red. This tree has not been incorporated into the landscape plan and will therefore be removed.

## Tree #2

**Common Name -**  
Royal Palm

**DBH (in) -** 15

**Condition -**

**Native? -**

Fair

Yes

**Scientific Name -**  
*Roystonea regia*

**Canopy Spread (ft) -** 20

**Disposition -**

Relocate - 10ft radius TPZ



Tree #2 is a Royal Palm street tree located along La Gorce Circle. It is in fair condition - the canopy is small and the trunk is pencilling.

This tree is to be relocated and root pruning shall occur a minimum of 4-6 weeks prior to digging the palm and shall be performed or supervised by Certified Arborist. Minimum rootball measurement shall be based upon the most recent *Florida Grades & Standards for Nursery Plants*. Prior to transplanting, the apical bud shall be protected by tying up palm fronds. Leaves shall be untied as soon as the palm is planted. When lifting the palm, a nylon sling with adequate padding shall be used and care shall be taken to not injure or compress the trunk. Plant at grade, with 2" of root initiation zone visible if applicable. Transplanting shall occur as soon as possible and no more than 24 hours after being dug for relocation. The backfill soil shall be irrigated during and following relocation. Wooden braces shall be installed to stabilize the tree. Following relocation, a 10ft radius TPZ shall be erected.

### Tree #3

**Common Name -**  
Royal Palm

**DBH (in) -** 14.5

**Condition -**

**Native? -**

Fair

No

**Scientific Name -**  
*Roystonea regia*

**Canopy Spread (ft) -** 20

**Disposition -**

Remain - 10ft radius TPZ



Tree #3 is a Royal Palm street tree located along La Gorce Circle. It is in fair condition - the canopy is small and the trunk is pencilling.

This tree is to remain and protective barriers shall be placed 10ft from the tree trunk. Barriers shall be installed prior to the start of construction, and shall remain in place until development is completed and until the department authorizes their removal. Barriers shall be a minimum of 4ft high, and shall be constructed of continuous chain link fence with metal posts at 8ft spacing, or of 2x4 posts with three equally spaced 2x4 rails. Posts may be shifted to avoid roots. No materials shall be placed or disposed of within the TPZ. Natural grade shall be maintained within the TPZ.

### Tree #4

**Common Name -**  
Strangler Fig

**DBH (in) -** 48

**Condition -**

**Native? -**

Fair

Yes

**Scientific Name -**  
*Ficus aurea*

**Canopy Spread (ft) -** 30

**Disposition -**

Remain - 15ft radius TPZ



Tree #4 is a Strangler Fig located in the front northwest corner of the property. It is in fair condition. The canopy is asymmetrical with healthy foliage. There is a palm growing in the canopy of the tree.

This tree is to remain and protective barriers shall be placed 15ft from the tree trunk. Barriers shall be installed prior to the start of construction, and shall remain in place until development is completed and until the department authorizes their removal. Barriers shall be a minimum of 4ft high, and shall be constructed of continuous chain link fence with metal posts at 8ft spacing, or of 2x4 posts with three equally spaced 2x4 rails. Posts may be shifted to avoid roots. No materials shall be placed or disposed of within the TPZ. Natural grade shall be maintained within the TPZ.

## Tree #5

**Common Name -**  
Pygmy Date Palm (double)

**DBH (in) -** 4, 4  
**Height (ft) -** 6

**Condition -**  
Good

**Native? -**  
No

**Scientific Name -**  
*Phoenix roebelenii*

**Canopy Spread (ft) -** 5

**Disposition -**  
Remove



Tree #5 is a double Pygmy Date Palm located in the front northwest corner of the property. It is in good condition. This tree has not been incorporated into the landscape plan and will therefore be removed.

## Tree #6

**Common Name -**  
Pygmy Date Palm (triple)

**DBH (in) -** 4, 4, 4  
**Height (ft) -** 6

**Condition -**  
Good

**Native? -**  
No

**Scientific Name -**  
*Phoenix roebelenii*

**Canopy Spread (ft) -** 5

**Disposition -**  
Remove



Tree #6 is a triple Pygmy Date Palm located in the front northwest corner of the property. It is in good condition. This tree has not been incorporated into the landscape plan and will therefore be removed.

## Tree #7

**Common Name -**  
Royal Palm

**DBH (in) -** 12  
**Height (ft) -** 25

**Condition -**  
Fair

**Native? -**  
Yes

**Scientific Name -**  
*Roystonea regia*

**Canopy Spread (ft) -** 15

**Disposition -**  
Remove



Tree #7 is a Royal Palm located in the front northwest corner of the property. It is small and in fair condition. Some of the foliage is frizzled. This tree has not been incorporated into the landscape plan and will therefore be removed.

## Trees #8 - 10

**Common Name -**  
Latan Palms (3)

**DBH (in) -** 12 each  
**Height (ft) -** 12

**Condition -**  
Good

**Native? -**  
No

**Scientific Name -**  
*Latania loddigesii*

**Canopy Spread (ft) -** 12

**Disposition -**  
Relocate - 6ft radius TPZ



Trees #8 - 10 are three Latan Palms located in the front northwest corner of the property. They are in good condition with healthy canopies and nice form. These trees are to be relocated and root pruning shall occur a minimum of 4-6 weeks prior to digging the palm and shall be performed or supervised by Certified Arborist. Minimum rootball measurement shall be based upon the most recent *Florida Grades & Standards for Nursery Plants*. Prior to transplanting, the apical bud shall be protected by tying up palm fronds. Leaves shall be untied as soon as the palm is planted. When lifting the palm, a nylon sling with adequate padding shall be used and care shall be taken to not injure or compress the trunk. Plant at grade, with 2" of root initiation zone visible if applicable. Transplanting shall occur as soon as possible and no more than 24 hours after being dug for relocation. The backfill soil shall be irrigated during and following relocation. Wooden braces shall be installed to stabilize the tree. Following relocation, a 6ft radius TPZ shall be erected.

## Tree #11

**Common Name -**  
Sabal Palm

**DBH (in) -** 10  
**Height (ft) -** 30


**Condition -**  
Poor

**Native? -**  
Yes

**Scientific Name -**  
*Sabal palmetto*

**Canopy Spread (ft) -** 6

**Disposition -**  
Remove

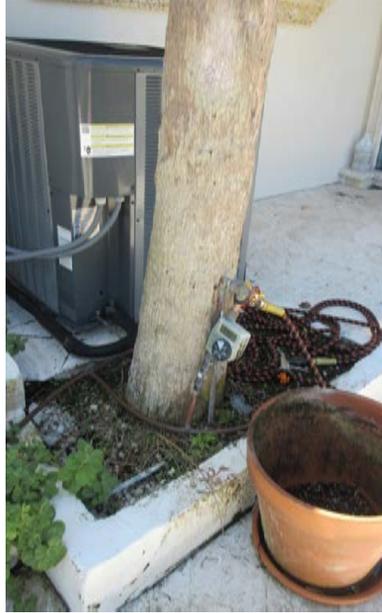

Tree #11 is a Sabal Palm located on the north side of the house. It is growing in a small raised planter and has a very small rooting space. It is in poor condition with a thin canopy and bleeding cankers on the trunk. This tree has not been incorporated into the landscape plan and will therefore be removed.

## Trees #12 - 16

**Common Name -**  
Areca Palms (3)

**DBH (in) -** cluster  
**Height (ft) -** 15

**Condition -**  
Fair

**Native? -**  
No

**Scientific Name -**  
*Dypsis lutescens*

**Canopy Spread (ft) -** 8

**Disposition -**  
Remove



Trees #12 - 16 are three Areca Palm clusters located on the north side of the property. They are in fair condition with some chlorotic foliage. These trees have not been incorporated into the landscape plan and will therefore be removed.

## Tree #17

**Common Name -**  
Areca Palms (2)

**DBH (in) -** cluster  
**Height (ft) -** 20

**Condition -**  
Poor

**Native? -**  
No

**Scientific Name -**  
*Dypsis lutescens*

**Canopy Spread (ft) -** 8

**Disposition -**  
Remove



Tree #17 is two Areca Palm clusters located on the north side of the property. It is in poor condition with a thin canopy and chlorotic and frizzled fronds. This tree has not been incorporated into the landscape plan and will therefore be removed.

## Tree #18

**Common Name -**  
Sabal Palm

**DBH (in) -** 14  
**Height (ft) -** 25

**Condition -**  
Good

**Native? -**  
Yes

**Scientific Name -**  
*Sabal palmetto*

**Canopy Spread (ft) -** 15

**Disposition -**  
Remove



Tree #18 is a Sabal Palm located in the rear northeast corner of the property. It is in good condition with a green canopy. This tree has not been incorporated into the landscape plan and will therefore be removed.

## Tree #19

**Common Name -**  
Date Palm

**DBH (in) -** 17  
**Height (ft) -** 30

**Condition -**  
Good

**Native? -**  
No

**Scientific Name -**  
*Phoenix dactylifera*

**Canopy Spread (ft) -** 20

**Disposition -**  
Remove



Tree #19 is a Date Palm located at the rear of the property. It is in good condition with a symmetrical, healthy canopy. This tree has not been incorporated into the landscape plan and will therefore be removed.

## Tree #20

**Common Name -**  
Date Palm

**DBH (in) -** 16.5  
**Height (ft) -** 30

**Condition -**  
Good

**Native? -**  
No

**Scientific Name -**  
*Phoenix dactylifera*

**Canopy Spread (ft) -** 20

**Disposition -**  
Remove



Tree #20 is a Date Palm located at the rear of the property. It is in good condition with a symmetrical, healthy canopy. This tree has not been incorporated into the landscape plan and will therefore be removed.

## Trees #21 - 33

**Common Name -**  
Coconut Palms (13)

**DBH (in) -** 12 each  
**Height (ft) -** 30

**Condition -**  
Good

**Native? -**  
No

**Scientific Name -**  
*Cocos nucifera*

**Canopy Spread (ft) -** 16

**Disposition -**  
Remove



Trees #21 - 33 are thirteen Coconut Palms located along the rear of the property. They are in overall good condition. There are no dead fronds nor coconut fruits. There is some climbing spike damage on the trunks. These trees have not been incorporated into the landscape plan and will therefore be removed.

## Tree #34

**Common Name -**  
Seagrape

**DBH (in) -** 12, 12, 23  
**Height (ft) -** 25

**Condition -**  
Good

**Native? -**  
Yes

**Scientific Name -**  
*Coccoloba uvifera*

**Canopy Spread (ft) -** 25

**Disposition -**  
Remain - 12.5ft radius TPZ



Tree #34 is a Seagrape located in the rear southeast corner of the property. It is multi-trunked and in good condition. The canopy is dense. The foliage shows some chewing insect damage.

This tree is to remain and protective barriers shall be placed 12.5ft from the tree trunk. Barriers shall be installed prior to the start of construction, and shall remain in place until development is completed and until the department authorizes their removal. Barriers shall be a minimum of 4ft high, and shall be constructed of continuous chain link fence with metal posts at 8ft spacing, or of 2x4 posts with three equally spaced 2x4 rails. Posts may be shifted to avoid roots. No materials shall be placed or disposed of within the TPZ. Natural grade shall be maintained within the TPZ.

## Tree #35

**Common Name -**  
Sabal Palm

**DBH (in) -** 12


**Condition -**  
Fair

**Native? -**  
Yes

**Scientific Name -**  
*Sabal palmetto*

**Canopy Spread (ft) -** 10

**Disposition -**  
Remove

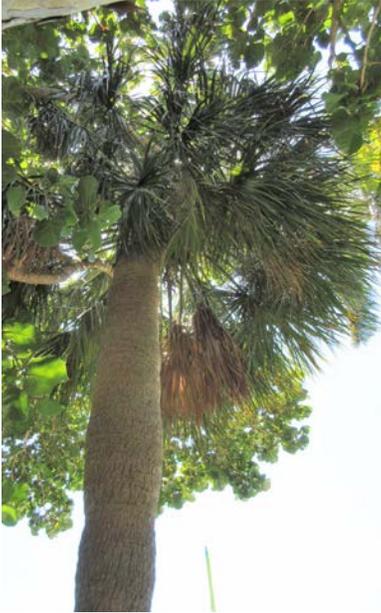

Tree #35 is a Sabal Palm located in the rear southeast corner of the property. It is growing beneath Seagrape #34 and is in fair condition. The canopy is small and the trunk is curved. This tree has not been incorporated into the landscape plan and will therefore be removed.

## Trees #36 - 38

**Common Name -**  
Sabal Palms (3)

**DBH (in) -** 12 each

**Condition -**  
Fair

**Native? -**  
Yes

**Scientific Name -**  
*Sabal palmetto*

**Canopy Spread (ft) -** 10

**Disposition -**  
Remove



Trees #36 - 38 are three Sabal Palms located in the rear southeast corner of the property. They are in fair condition with some lower dead fronds. The pseudobark is sloughing off in some areas. These trees have not been incorporated into the landscape plan and will therefore be removed.

## Tree #39

**Common Name -**  
Umbrella Tree

**DBH (in) -** 10  
**Height (ft) -** 25

**Condition -**  
Fair

**Native? -**  
Invasive

**Scientific Name -**  
*Schefflera actinophylla*

**Canopy Spread (ft) -** 15

**Disposition -**  
Remove



Tree #39 is an Umbrella Tree located on the south side of the property. It is in fair condition with a small canopy. This species is highly invasive in South Florida and this tree will therefore need to be removed.

## Tree #40/42

**Common Name -**  
Strangler Fig

**DBH (in) -** 64  
**Height (ft) -** 50

**Condition -**  
Good

**Native? -**  
Yes

**Scientific Name -**  
*Ficus aurea*


**Canopy Spread (ft) -** 70

**Disposition -**  
Remain - 35ft radius TPZ

Tree #40/42 is a Strangler Fig located on the south side of the property. It is in good condition. It has a wide-spreading canopy that is symmetrical with a nice form. There are a number of aerial roots, including where #42 is marked on the survey. The tree has good vigor and no cavities nor decay were observed. There is little deadwood. Prune to remove deadwood.

This tree is to remain and protective barriers shall be placed 35ft from the center of the tree trunk. Barriers shall be installed prior to the start of construction, and shall remain in place until development is completed and until the department authorizes their removal. Barriers shall be a minimum of 4ft high, and shall be constructed of continuous chain link fence with metal posts at 8ft spacing, or of 2x4 posts with three equally spaced 2x4 rails. Posts may be shifted to avoid roots. No materials shall be placed or disposed of within the TPZ. Natural grade shall be maintained within the TPZ. This tree should be monitored on a periodic basis for health and structural integrity.

## Tree #40/42 contd.

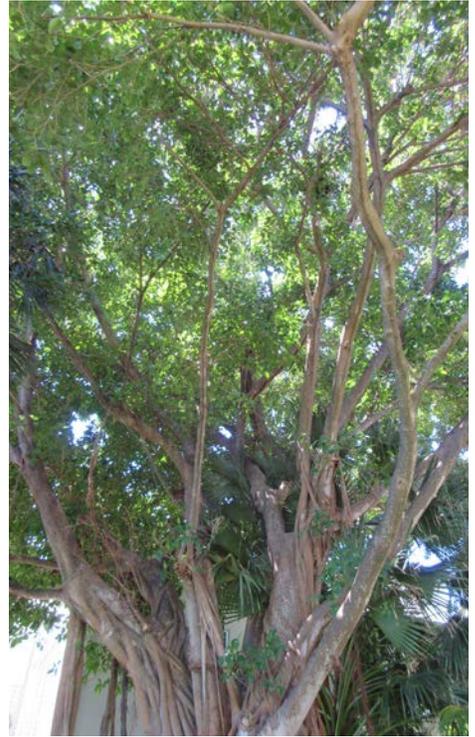

## Tree #41

**Common Name -**  
Chinese Fan Palm

**DBH (in) -** 12

**Condition -**  
Fair

**Native? -**  
No

**Scientific Name -**  
*Livistona chinensis*

**Height (ft) -** 15

**Canopy Spread (ft) -** 8

**Disposition -**  
Remove



Tree #41 is a Chinese Fan Palm located on the south side of the property. It is growing beneath the canopy of Ficus #40/42. There is some leaf skeletonizer damage to the fronds.

This tree has not been incorporated into the landscape plan and will therefore be removed.

## Tree #43

**Common Name -**  
Senegal Date Palm

**DBH (in) -** cluster

**Condition -**  
Good

**Native? -**  
No

**Scientific Name -**  
*Phoenix dactylifera*

**Height (ft) -** 15

**Canopy Spread (ft) -** 15

**Disposition -**  
Remove



Tree #43 is a Senegal Date Palm cluster located on the south side of the property. It is in good condition. This tree has not been incorporated into the landscape plan and will therefore be removed.

## Tree #44

**Common Name -**  
Senegal Date Palm

**DBH (in) -** cluster

**Condition -**  
Good

**Native? -**  
No

**Scientific Name -**  
*Phoenix dactylifera*

**Height (ft) -** 18

**Canopy Spread (ft) -** 15

**Disposition -**  
Remove



Tree #44 is a Senegal Date Palm cluster located on the south side of the property. It is in good condition. This tree has not been incorporated into the landscape plan and will therefore be removed.

## Tree #45

**Common Name -**  
Senegal Date Palm

**DBH (in) -** cluster

**Condition -**  
Good

**Native? -**  
No

**Scientific Name -**  
*Phoenix dactylifera*

**Canopy Spread (ft) -** 15

**Disposition -**  
Remove



Tree #45 is a Senegal Date Palm cluster located on the south side of the property. It is in good condition. This tree has not been incorporated into the landscape plan and will therefore be removed.

## Trees #46 - 48

**Common Name -**  
Sabal Palms (3)

**DBH (in) -** 12 each

**Condition -**  
Fair

**Native? -**  
Yes

**Scientific Name -**  
*Sabal palmetto*

**Canopy Spread (ft) -** 12

**Disposition -**  
Remove



Trees #46 - 48 are three Sabal Palms located on the south side of the property. They are in fair condition with some lower dead fronds.

These trees have not been incorporated into the landscape plan and will therefore be removed.

## Tree #49

**Common Name -**  
Sabal Palm

**DBH (in) -** 12  
**Height (ft) -** 30

**Condition -**  
Fair

**Native? -**  
Yes

**Scientific Name -**  
*Sabal palmetto*

**Canopy Spread (ft) -** 12

**Disposition -**  
Remove



Tree #49 is a Sabal Palm located on the south side of the house. It is in fair condition. This tree has not been incorporated into the landscape plan and will therefore be removed.

## Tree #50

**Common Name -**  
Fishtail Palm

**DBH (in) -** cluster  
**Height (ft) -** 15

**Condition -**  
Poor

**Native? -**  
No

**Scientific Name -**  
*Caryota mitis*

**Canopy Spread (ft) -** 12

**Disposition -**  
Remove



Tree #50 is a Fishtail Palm cluster located on the south side of the house. It is in poor condition with chlorotic foliage. One of the trunks is dead. This tree has not been incorporated into the landscape plan and will therefore be removed.

## Tree #51

**Common Name -**  
Senegal Date Palm

**DBH (in) -** cluster

**Condition -**  
Fair

**Native? -**  
No

**Scientific Name -**  
*Phoenix reclinata*

**Canopy Spread (ft) -** 18

**Disposition -**  
Remove



Tree #51 is a Senegal Date Palm located on the south side of the house. It is in fair condition with some chlorotic fronds. This tree has not been incorporated into the landscape plan and will therefore be removed.

## Tree #52

**Common Name -**  
Pygmy Date Palm (triple)

**DBH (in) -** 4, 4, 4

**Condition -**  
Good

**Native? -**  
No

**Scientific Name -**  
*Phoenix roebelenii*

**Canopy Spread (ft) -** 18

**Disposition -**  
Remove



Tree #52 is a triple Pygmy Date Palm located on the south side of the house. It is in good condition. This tree has not been incorporated into the landscape plan and will therefore be removed.

## Tree #53

**Common Name -**  
Date Palm

**DBH (in) -** 16  
**Height (ft) -** 40

**Condition -**  
Good

**Native? -**  
No

**Scientific Name -**  
*Phoenix dactylifera*

**Canopy Spread (ft) -** 20

**Disposition -**  
Remove



Tree #53 is a Date Palm located at the front southern corner of the house. It is in good condition with a symmetrical canopy. This tree has not been incorporated into the landscape plan and will therefore be removed.

## Tree #54

**Common Name -**  
Live Oak

**DBH (in) -** 35  
**Height (ft) -** 40


**Condition -**  
Fair

**Native? -**  
Yes

**Scientific Name -**  
*Quercus virginiana*

**Canopy Spread (ft) -** 45

**Disposition -**  
Remain - 22.5ft radius TPZ

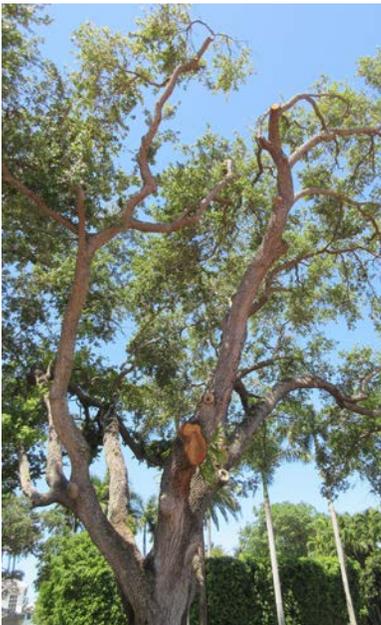

Tree #54 is a Live Oak located at the front of the property. It is in fair condition. There is a small amount of deadwood. The tree has been pruned recently and one notable poor pruning cut has been made (circled in red). This pruning cut is large at about 12 inches in diameter and will allow for the entry of decay organisms into the tree. Prune to remove deadwood.

This tree is to remain and protective barriers shall be placed 22.5ft from the tree trunk. Barriers shall be installed prior to the start of construction, and shall remain in place until development is completed and until the department authorizes their removal. Barriers shall be a minimum of 4ft high, and shall be constructed of continuous chain link fence with metal posts at 8ft spacing, or of 2x4 posts with three equally spaced 2x4 rails. Posts may be shifted to avoid roots. No materials shall be placed or disposed of within the TPZ. Natural grade shall be maintained within the TPZ. This tree should be monitored on a periodic basis for health and structural integrity.

## Tree #55

**Common Name -**  
Live Oak

**DBH (in) -** 42  
**Height (ft) -** 50

**Condition -**  
Fair

**Native? -**  
Yes

**Scientific Name -**  
*Quercus virginiana*

**Canopy Spread (ft) -** 55

**Disposition -**  
Remain - 27.5ft radius TPZ



Tree #55 is a Live Oak located at the front of the property. It is in fair condition. There is some deadwood and branch stubs. The tree has been pruned recently and one notable poor pruning cut has been made (circled in red). This pruning cut is large at about 16 inches in diameter and will allow for the entry of decay organisms into the tree. Also, there is little root flare visible. A root collar excavation is recommended. Prune to remove deadwood. This tree is to remain and protective barriers shall be placed 27.5ft from the tree trunk. Barriers shall be installed prior to the start of construction, and shall remain in place until development is completed and until the department authorizes their removal. Barriers shall be a minimum of 4ft high, and shall be constructed of continuous chain link fence with metal posts at 8ft spacing, or of 2x4 posts with three equally spaced 2x4 rails. Posts may be shifted to avoid roots. No materials shall be placed or disposed of within the TPZ. Natural grade shall be maintained within the TPZ. This tree should be monitored on a periodic basis for health and structural integrity.

## Tree #56

**Common Name -**  
Bismarck Palm

**DBH (in) -** 15  
**Height (ft) -** 30

**Condition -**  
Fair

**Native? -**  
No

**Scientific Name -**  
*Bismarckia nobilis*

**Canopy Spread (ft) -** 20

**Disposition -**  
Remain - 10ft radius TPZ



Tree #56 is a Bismarck Palm located in the front southwest corner of the property. It is growing beneath the canopy of Ficus #58. It is in fair condition. This tree is to remain and protective barriers shall be placed 10ft from the tree trunk. Barriers shall be installed prior to the start of construction, and shall remain in place until development is completed and until the department authorizes their removal. Barriers shall be a minimum of 4ft high, and shall be constructed of continuous chain link fence with metal posts at 8ft spacing, or of 2x4 posts with three equally spaced 2x4 rails. Posts may be shifted to avoid roots. No materials shall be placed or disposed of within the TPZ. Natural grade shall be maintained within the TPZ.

## Tree #57

**Common Name -**  
Solitaire Palms (4)

**DBH (in) -** 4 each  
**Height (ft) -** 35

**Condition -**  
Fair

**Native? -**  
No

**Scientific Name -**  
*Ptychosperma elegans*

**Canopy Spread (ft) -** 10

**Disposition -**  
Remove



Tree #57 is a group of four Solitaire Palms located on the south side of the property. They are in fair condition and are growing through the canopy of Ficus #58. These trees have not been incorporated into the landscape plan and will therefore be removed.

## Tree #58

**Common Name -**  
Rubber Fig

**DBH (in) -** 216  
**Height (ft) -** 50

**Condition -**  
Good

**Native? -**  
No

**Scientific Name -**  
*Ficus elastica*

**Canopy Spread (ft) -** 70

**Disposition -**  
Remain - 35ft radius TPZ

Tree #58 is a large Rubber Fig located on the south side of the property. The trunk is composed of many aerial roots and spans a large area. The tree is in good condition with a wide-spreading canopy. Little deadwood is present and the tree has a nice symmetrical form. Prune to remove deadwood.

This tree is to remain and protective barriers shall be placed 35ft from the center of the tree trunk. Barriers shall be installed prior to the start of construction, and shall remain in place until development is completed and until the department authorizes their removal. Barriers shall be a minimum of 4ft high, and shall be constructed of continuous chain link fence with metal posts at 8ft spacing, or of 2x4 posts with three equally spaced 2x4 rails. Posts may be shifted to avoid roots. No materials shall be placed or disposed of within the TPZ. Natural grade shall be maintained within the TPZ. This tree should be monitored on a periodic basis for health and structural integrity.

## Tree #58 contd.



## Tree #59

**Common Name -**  
Fishtail Palm

**DBH (in) -** cluster

**Condition -**  
Fair

**Native? -**  
No

**Scientific Name -**  
*Caryota mitis*

**Height (ft) -** 30

**Canopy Spread (ft) -** 10

**Disposition -**  
Remove



Tree #59 is a Fishtail Palm cluster located on the south side of the property. It is growing beneath the canopy of Ficus #58. It is in fair condition.

This tree has not been incorporated into the landscape plan and will therefore be removed.

## Tree #60

**Common Name -**  
Chinese Fan Palm

**DBH (in) -** 10

**Condition -**  
Good

**Native? -**  
No

**Scientific Name -**  
*Livistona chinensis*

**Height (ft) -** 25

**Canopy Spread (ft) -** 8

**Disposition -**  
Remove



Tree #60 is a Chinese Fan Palm located on the south side of the property. It is in good condition with a healthy canopy. This tree has not been incorporated into the landscape plan and will therefore be removed.

## Tree #61

**Common Name -**  
Chinese Fan Palm

**DBH (in) -** 10

**Condition -**  
Good

**Native? -**  
No

**Scientific Name -**  
*Livistona chinensis*

**Height (ft) -** 15

**Canopy Spread (ft) -** 8

**Disposition -**  
Remove



Tree #61 is a Chinese Fan Palm located on the south side of the property. It is in good condition with a healthy canopy. This tree has not been incorporated into the landscape plan and will therefore be removed.

## Tree #62

**Common Name -**  
Sabal Palm

**DBH (in) -** 8  
**Height (ft) -** 25

**Condition -**  
Poor

**Native? -**  
Yes

**Scientific Name -**  
*Sabal palmetto*

**Canopy Spread (ft) -** 8

**Disposition -**  
Remove



Tree #62 is a Sabal Palm located on the south side of the property. It is in poor condition with a thin canopy. This tree has not been incorporated into the landscape plan and will therefore be removed.

## Tree #63

**Common Name -**  
Areca Palm

**DBH (in) -** cluster  
**Height (ft) -** 30

**Condition -**  
Fair

**Native? -**  
No

**Scientific Name -**  
*Dypsis lutescens*

**Canopy Spread (ft) -** 15

**Disposition -**  
Remove



Tree #63 is an Areca Palm cluster located on the south side of the property. It is in fair condition. This tree has not been incorporated into the landscape plan and will therefore be removed.

## Tree #64

**Common Name -**  
Chinese Fan Palm

**DBH (in) -** 8  
**Height (ft) -** 20

**Condition -**  
Fair

**Native? -**  
No

**Scientific Name -**  
*Livistona chinensis*

**Canopy Spread (ft) -** 8

**Disposition -**  
Remove



Tree #64 is a Chinese Fan Palm located on the south side of the property. It is in fair condition - the trunk is leaning and there are many lower dead fronds. This tree has not been incorporated into the landscape plan and will therefore be removed.

## Tree #65

**Common Name -**  
Areca Palm

**DBH (in) -** cluster  
**Height (ft) -** 20

**Condition -**  
Fair

**Native? -**  
No

**Scientific Name -**  
*Dyopsis lutescens*

**Canopy Spread (ft) -** 8

**Disposition -**  
Remove



Tree #65 is an Areca Palm cluster located on the south side of the property. It is in fair condition. This tree has not been incorporated into the landscape plan and will therefore be removed.

## Tree #66

**Common Name -**  
Senegal Date Palm

**DBH (in) -** cluster

**Condition -**  
Good

**Native? -**  
No

**Scientific Name -**  
*Phoenix reclinata*

**Height (ft) -** 15

**Canopy Spread (ft) -** 8

**Disposition -**  
Remove



Tree #66 is a Senegal Date Palm located on the south side of the property. It is in good condition. This tree has not been incorporated into the landscape plan and will therefore be removed.

## Tree #67

**Common Name -**  
Chinese Fan Palm (triple)

**DBH (in) -** 10, 10, 10

**Condition -**  
Good

**Native? -**  
No

**Scientific Name -**  
*Livistona chinensis*

**Height (ft) -** 14

**Canopy Spread (ft) -** 15

**Disposition -**  
Remove



Tree #67 is a triple Chinese Fan Palm located on the north side of the property. It is small and in good condition with healthy fronds.

This tree has not been incorporated into the landscape plan and will therefore be removed.

# Notes - TPZ Calculations & Tree and Palm Relocation

## **Tree Protection Zone (TPZ) -**

- For trees and palms that are to remain, protective barriers shall be placed at the dripline or 10ft radius from the trunk, whichever is greater.
- For trees and palms that are relocated, protective barriers shall be placed at the dripline or 1 - 2ft outside the rootball, whichever is greater.

## **Tree and Palm Relocation Notes -**

1. All phases of transplanting trees and palms to be performed or supervised by Certified Arborist.
2. Trees to be relocated shall be root pruned six to eight weeks prior to transplanting. Landscape Contractor shall maintain transplanted material during construction period by watering, moving, spraying, fertilizing, and pruning.
3. Landscape Contractor is responsible for verifying locations of all underground and overhead utilities and easements prior to commencing work. All utility companies and/or the General Contractor shall be notified to verify locations prior to digging. Utility trenching is to be coordinated with the Landscape Contractor prior to beginning of project. The Owner and Certified Arborist shall not be responsible for damage to utility or irrigation lines.
4. The Landscape Contractor shall comply with all local and state codes and shall be responsible for obtaining all applicable permits.
5. The Landscape Contractor shall regularly inspect the relocated material to ensure compliance with standard horticultural practices.
6. The Landscape Contractor is responsible for guaranteeing the transplanted trees and palms for a period of one year. At the time of the final inspection all transplanted trees and palms that are not in viable condition shall be replaced by the Landscape Contractor.
7. The Landscape Contractor shall take all precautions to minimize shock of root pruning and transplanting in accordance with standard arboriculture practices.
8. The diameter of the root ball to be transplanted shall follow the guidelines set forth in the latest edition of the Florida Grades and Standards for Nursery Plants.
9. Roots shall be cleanly cut with a sharp spade, hand saw, chainsaw, or other approved root-pruning equipment.
10. Trees shall not be pruned at transplanting to compensate for root loss. Any pruning required shall be as per the ANSI A300 Standards.
11. For all palms except Sabal palmetto, only dead fronds shall be removed. Sabal palmetto shall have all fronds cut without damaging the bud. Fronds shall be securely tied around the bud prior to relocation and shall be untied after placement in the new planting hole. The bud shall be protected from damage or injury during relocation.
12. After root pruning trees, backfill roots to original existing grade with existing soil free of any deleterious material to root growth.
13. Provide a layer of 3" mulch over backfill area to prevent weed growth, conserve moisture and prevent evaporation. Keep mulch 6" away from the trunk.
14. Provide tree protection as per Landscape Architect's Tree Protection Detail to ensure that the tree or root system is not damaged during the root-pruning period.
15. After root pruning and prior to relocation, tree(s) shall be watered a minimum of twice weekly.
16. Transplanting shall occur within 24 hours after being dug for relocation. The root ball shall be kept moist.
17. Digging and preparation of the new hole for the transplant shall be done prior to removing the tree from the existing location.
18. The depth of the new hole shall be equal to the depth of the root ball and the width shall be equal to two to three times the width of the root ball.
19. Trees and palms shall be lifted from the ground with heavy equipment designed specifically for tree relocation so that the trunk and crown is not impacted and damaged by the equipment.
20. The slings used to lift the trees and large palms shall be non-binding nylon slings that are wrapped under the root ball to support the weight of tree or palm. Slings shall not be solely wrapped around the trunk of the tree. Padding the sling may be necessary so that the trunk is not damaged.

---

## Notes - Tree and Palm Relocation (Contd.)

21. Trees and palms shall be planted so that the top of the rootball is flush with the existing grade. Ensure that deep planting does not occur. The tree and palm shall be centrally positioned in the planting hole and set straight, plumb or normal to the growth pattern prior to transplanting.

22. Transplanted trees and palms shall be backfilled with a uniform mix of 25% fully decomposed compost and 75% existing site soil cleaned free of weeds and rocks.

23. Trees and palms shall be watered to eliminate air pockets in the backfill mix prior to mulching.

24. A 4" soil berm shall be created around the edge of the planting hole to hold water, or as per the Landscape Architect's Planting Details.

25. Install tree and palm bracing as per the Landscape Architect's Planting Details, to ensure stability of trees and palms.

26. After transplanting trees and palms, the Landscape Contractor shall be responsible for watering to maintain soil moisture during the guarantee period. The following schedule is suggested: First month - Daily; Second month - 3 times per week; Third and Fourth month - 2 times per week; Last Eight months - 1 time per week. For trees over 4" in caliper at the time of planting, the suggested schedule is: First 6 weeks - Daily; from 1.5 months to 6 months - 3 times per week, last 6 months - 1 time per week.

## Notes - Tree and Palm Protection

1. Fences shall be erected to protect trees and palms to be preserved. Fences define a specific protection zone for each tree or group of trees. Fences shall be installed prior to the beginning of construction and are to remain until all site work has been completed. Fences may not be relocated or removed without the written permission of the Arborist. Refer to the Landscape Architect's Tree Protection Detail.
2. Construction trailers, traffic, and storage areas must remain outside fenced areas at all times.
3. All underground utilities and drain or irrigation lines shall be routed outside the tree protection zone. If lines must traverse the protection area, disturbance shall be minimized by using techniques such as tunneling or boring.
4. No materials, equipment, spoil, or waste or washout water may be deposited, stored, or parked within the tree protection zone.
5. Additional tree pruning required for clearance during construction must be approved by the Certified Arborist and shall be performed by trained arborists, not by construction personnel.
6. If injury should occur to any tree during construction, it should be evaluated as soon as possible by the Landscape Contractor and the Certified Arborist should be notified immediately.
7. Any grading, construction, demolition, or other work that is expected to encounter tree roots must be monitored by the Landscape Contractor.
8. All trees shall be irrigated at least two times a week. Each irrigation session shall wet the soil within the tree protection zone to a depth of 30 inches.
9. Before grading, pad preparation, or excavation for foundations, footings, walls, or trenching near trees the trees shall be root pruned at the edge of the tree protection zone by cutting all roots cleanly to a depth of 36 inches. Roots shall be cut manually by digging a trench and cutting exposed roots with a saw, vibrating knife, rock saw, narrow trencher with sharp blades, or other approved root-pruning equipment.
10. Any roots damaged during grading or construction shall be exposed to sound tissue and cut cleanly with a saw.
11. Spoil from trenches, basements, or other excavations shall not be placed within the tree protection zone, either temporarily or permanently.
12. No burn piles or debris pits shall be placed within the tree protection zone. No ashes, debris, or garbage may be dumped or buried within the tree protection zone.
13. Maintain fire-safe areas around the fences. Also, no heat sources, flames, ignition sources, or smoking is allowed near mulch or trees.
14. Protective barriers shall be placed around each tree, cluster of trees, or the edge of the preservation area at the specified distance. Protective barriers shall be a minimum of four feet above ground level and shall be constructed of wood, plastic, or metal, and shall remain in place until development is completed. Protective barriers shall be in place prior to the start of any construction.
15. Understory plants within protective barriers shall be protected.
16. No excess oil, fill, equipment, building materials or building debris shall be placed within the areas surrounded by protective barriers, nor shall there be disposal of any waste material such as paints, oils, solvents, asphalt, concrete, mortar or any other material harmful to trees or understory plants within the areas surrounded by protective barriers.
17. Trees shall not be braced in such a fashion as to scar, penetrate, perforate or otherwise inflict damage to the tree.
18. Natural grade shall be maintained within protective barriers. In the event that the natural grade of the site is changed as a result of site development such that the safety of the tree may be endangered, tree wells or retaining walls are required.
19. Fences and walls shall be constructed to avoid disturbance to any protected tree. Post holes and trenches located close to trees shall be dug by hand and adjusted as necessary, using techniques such as discontinuous footings, to avoid damage to major roots.

*Note: Trees inherently pose a certain degree of hazard and risk from breakage, failure or other causes and conditions. Recommendations that are made are intended to minimize or reduce such hazardous conditions. However, there can be no guarantee or warranty that efforts to discover or correct unsafe conditions will prevent future breakage or failure, nor can there be any guarantee that all hazardous conditions have been detected. The client should not infer that a tree is safe either because services have been recommended or done to reduce risk, or because no services have been recommended or done on a specific tree. The client assumes any and all risks associated with pursuing consultant's advice and fully understands that he or she is engaged in securing professional consultation regarding the above-mentioned property.*